

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :					
Product line		: W22 NEMA Premium Efficiency Three-Phase	Product code :	11355724	
Frame	: 364/5T	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 346 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.9884 kgm ²		
Design	: B				
Output [HP]	30	30	30	30	
Poles	8	8	8	8	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	76.2/38.1	45.5	43.3	42.2	
L. R. Amperes [A]	472/236	223	238	249	
LRC [A]	6.2x(Code G)	4.9x(Code E)	5.5x(Code F)	5.9x(Code G)	
No load current [A]	32.0/16.0	16.0	17.0	18.0	
Rated speed [RPM]	882	725	725	730	
Slip [%]	2.00	3.33	3.33	2.67	
Rated torque [kgfm]	24.7	30.0	30.0	29.8	
Locked rotor torque [%]	160	120	140	150	
Breakdown torque [%]	229	160	190	200	
Service factor	1.25	1.00	1.00	1.00	
Temperature rise	80 K	105 K	105 K	105 K	
Locked rotor time	45s (cold) 25s (hot)	30s (cold) 17s (hot)	34s (cold) 19s (hot)	32s (cold) 18s (hot)	
Noise level ²	60.0 dB(A)	56.0 dB(A)	56.0 dB(A)	56.0 dB(A)	
Efficiency (%)	25%				
	50%	91.5	89.0	90.5	
	75%	91.7	89.5	90.6	
	100%	91.7	89.5	90.6	
Power Factor	25%				
	50%	0.62	0.71	0.67	
	75%	0.73	0.79	0.77	
	100%	0.79	0.82	0.81	
Losses at normative operating points (speed;torque), in percentage of rated output power					
Losses (%)	P1 (0,9;1,0)	8.9	8.9	8.9	8.9
	P2 (0,5;1,0)	7.7	7.7	7.7	7.7
	P3 (0,25;1,0)	7.2	7.2	7.2	7.2
	P4 (0,9;0,5)	3.9	3.9	3.9	3.9
	P5 (0,5;0,5)	2.8	2.8	2.8	2.8
	P6 (0,5;0,25)	1.7	1.7	1.7	1.7
	P7 (0,25;0,25)	1.3	1.3	1.3	1.3
Bearing type	: Drive end : 6314 C3 Non drive end : 6314 C3	Foundation loads			
Sealing	: WSeal WSeal	Max. traction	: 497 kgf		
Lubrication interval	: 20000 h 20000 h	Max. compression	: 843 kgf		
Lubricant amount	: 27 g 27 g				
Lubricant type	: Mobil Polyrex EM				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	21/10/2024			1 / 6	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 81.8A SF 1.10 SFA 90.0A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	21/10/2024		2 / 6	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11355724

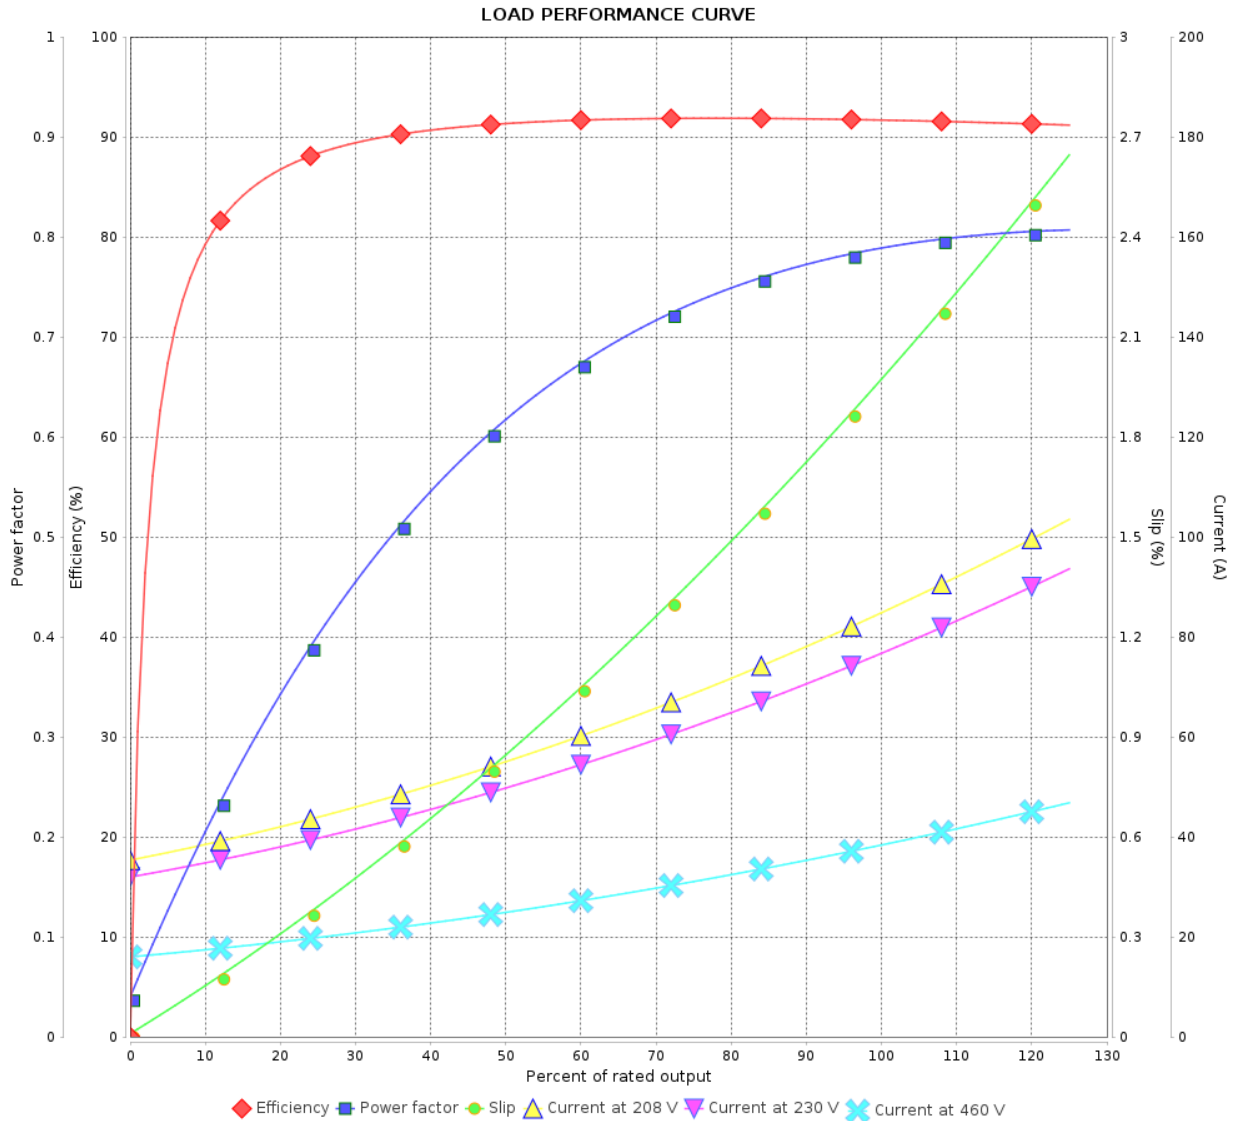

Performance : 230/460 V 60 Hz 8P

Rated current : 76.2/38.1 A
 LRC : 6.2
 Rated torque : 24.7 kgfm
 Locked rotor torque : 160 %
 Breakdown torque : 229 %
 Rated speed : 882 rpm

Moment of inertia (J) : 0.9884 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11355724

LOAD PERFORMANCE CURVE

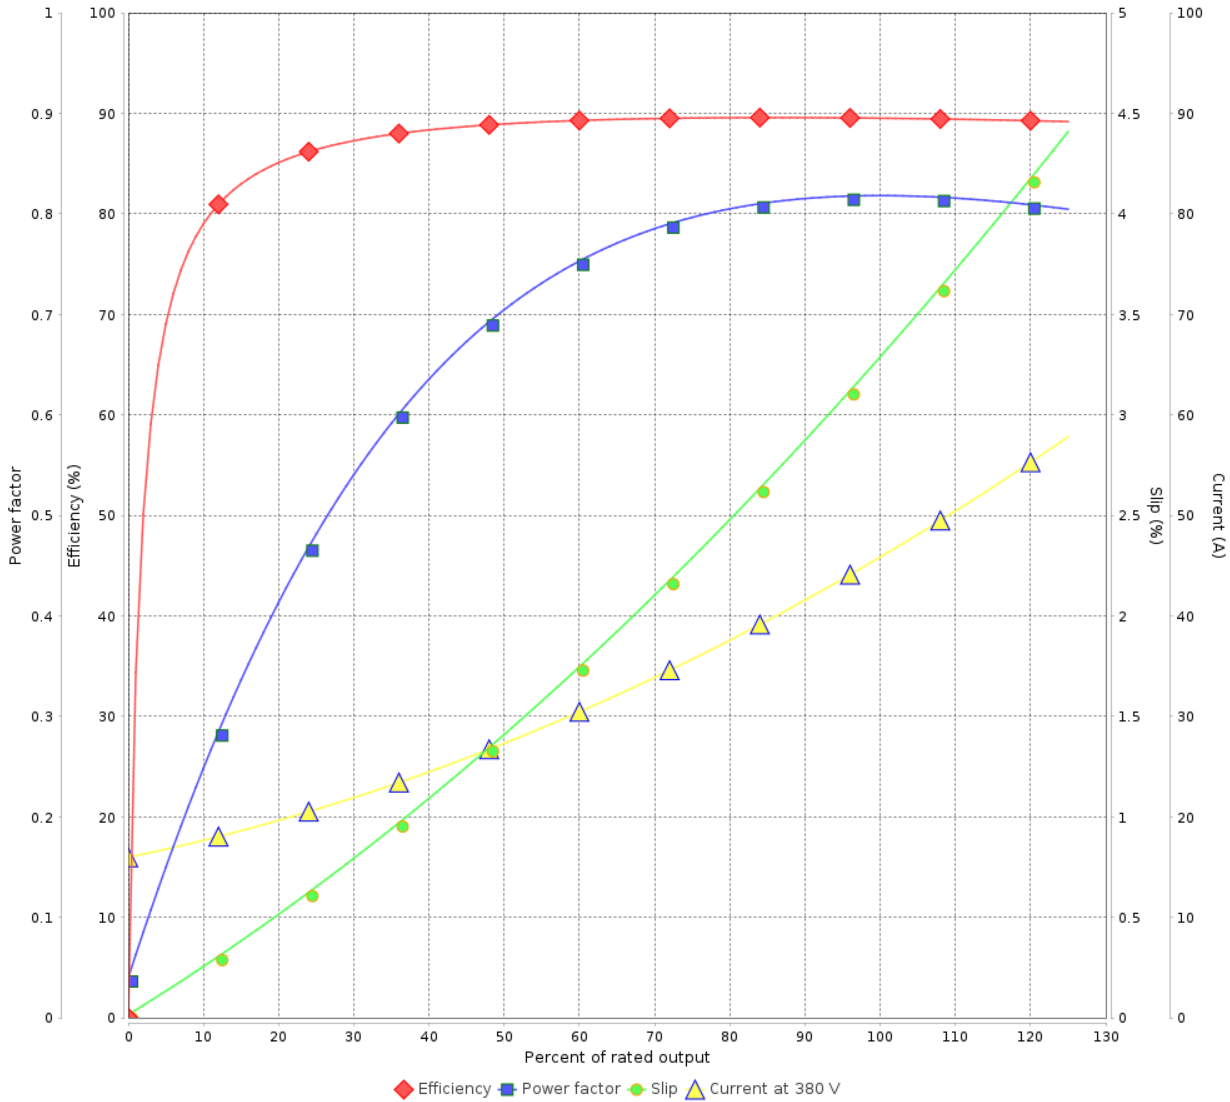

Performance : 380 V 50 Hz 8P IE2

Rated current	: 45.5 A	Moment of inertia (J)	: 0.9884 kgm ²
LRC	: 4.9	Duty cycle	: Cont.(S1)
Rated torque	: 30.0 kgfm	Insulation class	: F
Locked rotor torque	: 120 %	Service factor	: 1.00
Breakdown torque	: 160 %	Temperature rise	: 105 K
Rated speed	: 725 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 6	Revision
Checked by				
Date	21/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 11355724

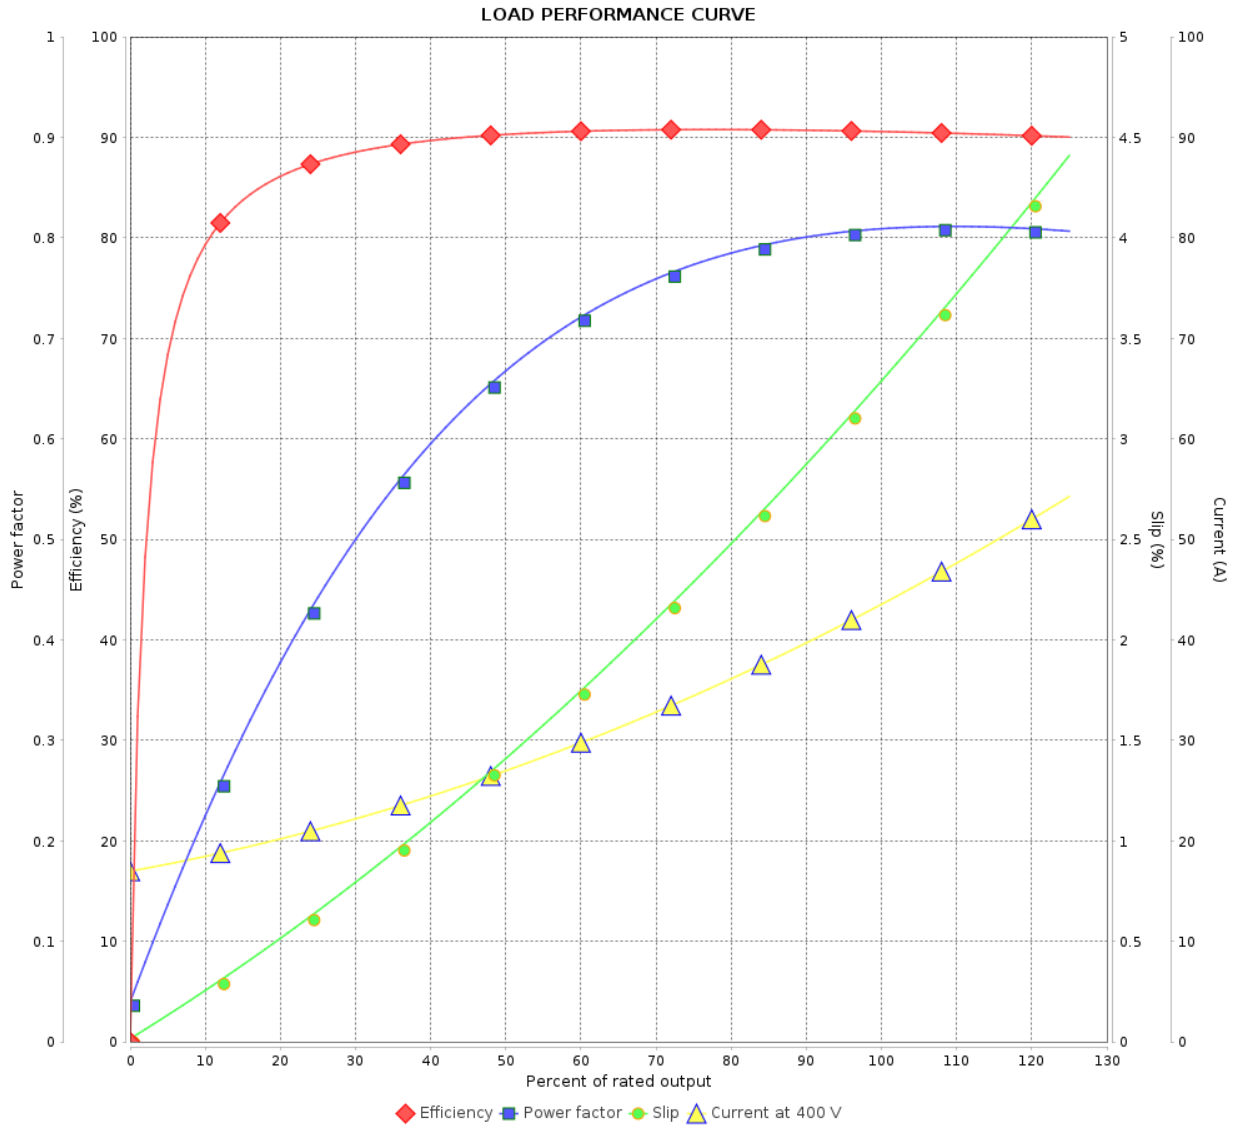

Performance : 400 V 50 Hz 8P IE3

Rated current : 43.3 A
 LRC : 5.5
 Rated torque : 30.0 kgfm
 Locked rotor torque : 140 %
 Breakdown torque : 190 %
 Rated speed : 725 rpm

Moment of inertia (J) : 0.9884 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 105 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		5 / 6		
Date		21/10/2024		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11355724

LOAD PERFORMANCE CURVE

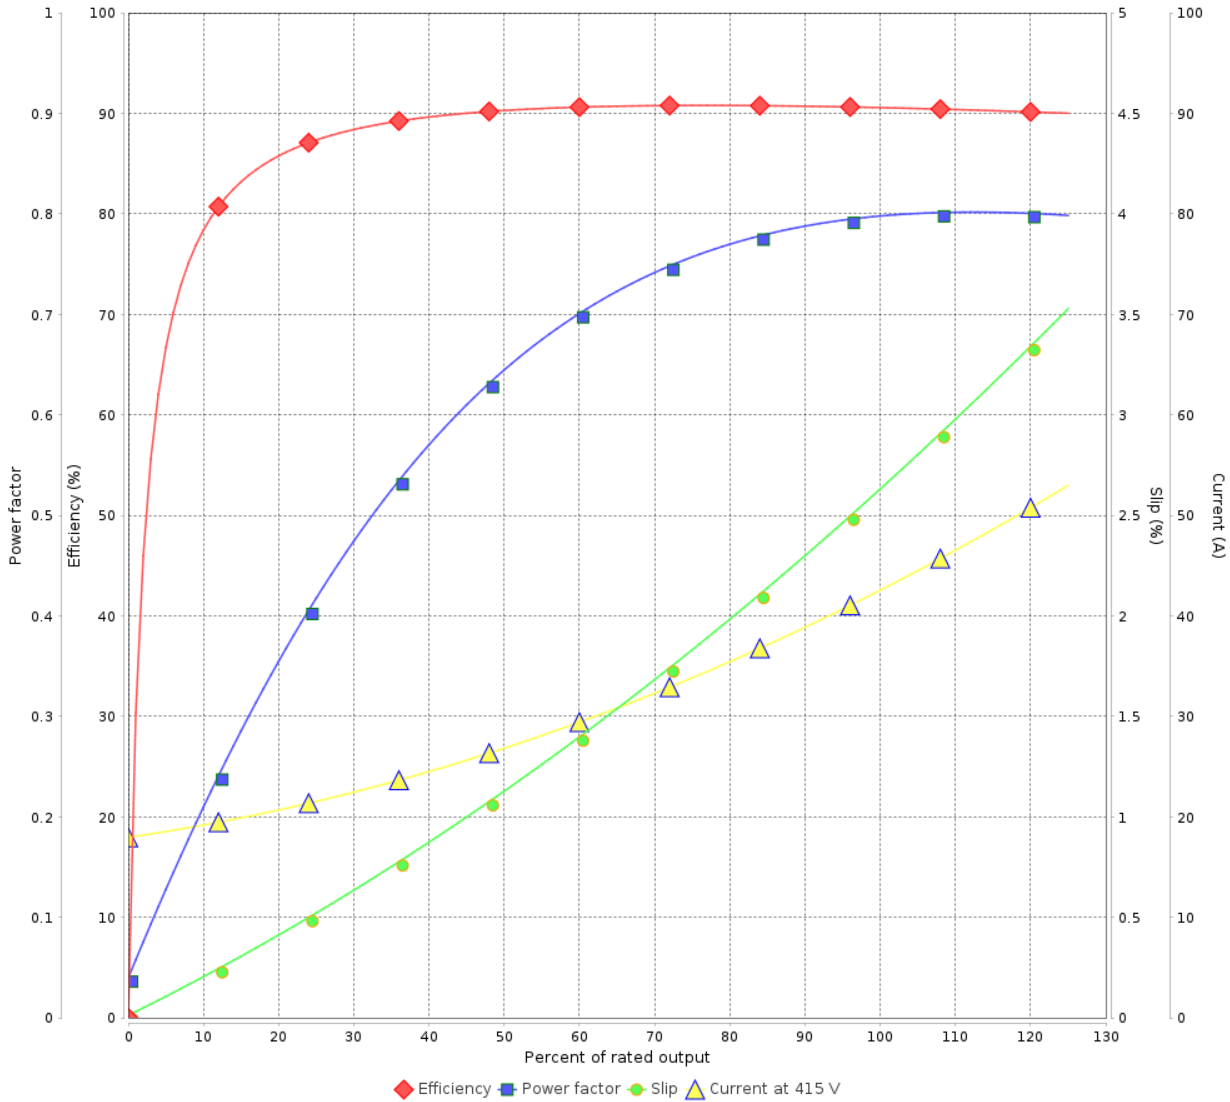

Performance : 415 V 50 Hz 8P IE3

Rated current	: 42.2 A	Moment of inertia (J)	: 0.9884 kgm ²
LRC	: 5.9	Duty cycle	: Cont.(S1)
Rated torque	: 29.8 kgfm	Insulation class	: F
Locked rotor torque	: 150 %	Service factor	: 1.00
Breakdown torque	: 200 %	Temperature rise	: 105 K
Rated speed	: 730 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 6	Revision
Checked by				
Date	21/10/2024			

