

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11165470

Frame : 364/5T	Cooling method : IC411 - TEFC
Insulation class : F	Mounting : F-1
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line
Altitude : 1000 m.a.s.l.	Approx. weight ³ : 407 kg
Protection degree : IP55	Moment of inertia (J) : 0.9189 kgm ²
Design : B	

Output [HP]	40	30	30	30	40	40	40
Poles	6	6	6	6	6	6	6
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	93.0/46.5	43.0	41.1	40.0	57.8	55.1	53.4
L. R. Amperes [A]	595/298	275	296	308	283	303	320
LRC [A]	6.4x(Code G)	6.4x(Code G)	7.2x(Code H)	7.7x(Code J)	4.9x(Code E)	5.5x(Code F)	6.0x(Code G)
No load current [A]	33.0/16.5	16.0	17.0	17.8	16.0	17.0	17.8
Rated speed [RPM]	1183	985	987	988	975	980	982
Slip [%]	1.42	1.50	1.30	1.20	2.50	2.00	1.80
Rated torque [kgfm]	24.5	22.1	22.1	22.0	29.8	29.6	29.6
Locked rotor torque [%]	200	210	240	270	160	180	200
Breakdown torque [%]	240	250	280	310	190	210	229
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	37s (cold) 21s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)
Noise level ²	66.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)	63.0 dB(A)
Efficiency (%)	25%						
	50%	93.6	92.4	92.3	91.9	93.0	93.0
	75%	93.6	92.8	93.1	93.0	92.4	93.0
	100%	94.1	92.5	93.0	93.2	91.7	92.4
Power Factor	25%						
	50%	0.73	0.68	0.66	0.63	0.78	0.76
	75%	0.82	0.80	0.79	0.76	0.84	0.83
	100%	0.86	0.84	0.83	0.82	0.86	0.85

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	6.1	6.1	6.1	6.1	6.1	6.1
	P2 (0,5;1,0)	5.0	5.0	5.0	5.0	5.0	5.0
	P3 (0,25;1,0)	4.4	4.4	4.4	4.4	4.4	4.4
	P4 (0,9;0,5)	2.8	2.8	2.8	2.8	2.8	2.8
	P5 (0,5;0,5)	1.9	1.9	1.9	1.9	1.9	1.9
	P6 (0,5;0,25)	1.1	1.1	1.1	1.1	1.1	1.1
	P7 (0,25;0,25)	0.8	0.8	0.8	0.8	0.8	0.8

Bearing type : Sealing : Lubrication interval : Lubricant amount : Lubricant type :	Drive end	Non drive end	Foundation loads Max. traction : 560 kgf Max. compression : 967 kgf
	6314 C3	6314 C3	
	WSeal	WSeal	
	17000 h	17000 h	
	27 g	27 g	
	Mobil Polyrex EM		

This revision replaces and cancel the previous one, which must be eliminated.

(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 1 / 9	Revision
Checked by				
Date	21/10/2024			

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 103A SF 1.10 SFA 113A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	21/10/2024		2 / 9	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11165470

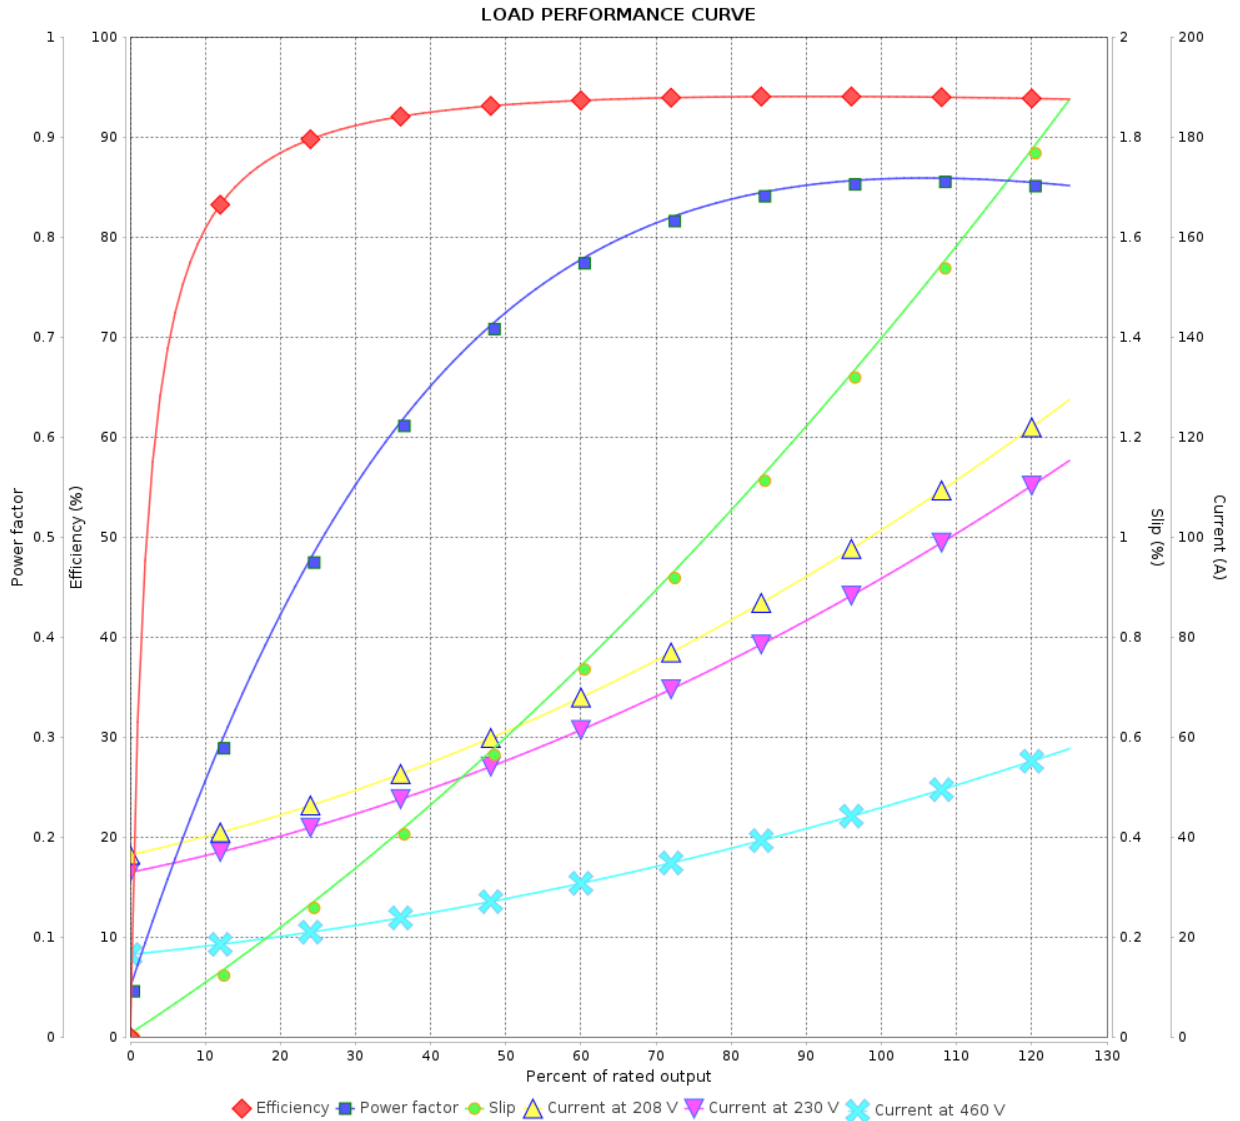

Performance : 230/460 V 60 Hz 6P

Rated current : 93.0/46.5 A
 LRC : 6.4
 Rated torque : 24.5 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 240 %
 Rated speed : 1183 rpm

Moment of inertia (J) : 0.9189 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11165470

LOAD PERFORMANCE CURVE

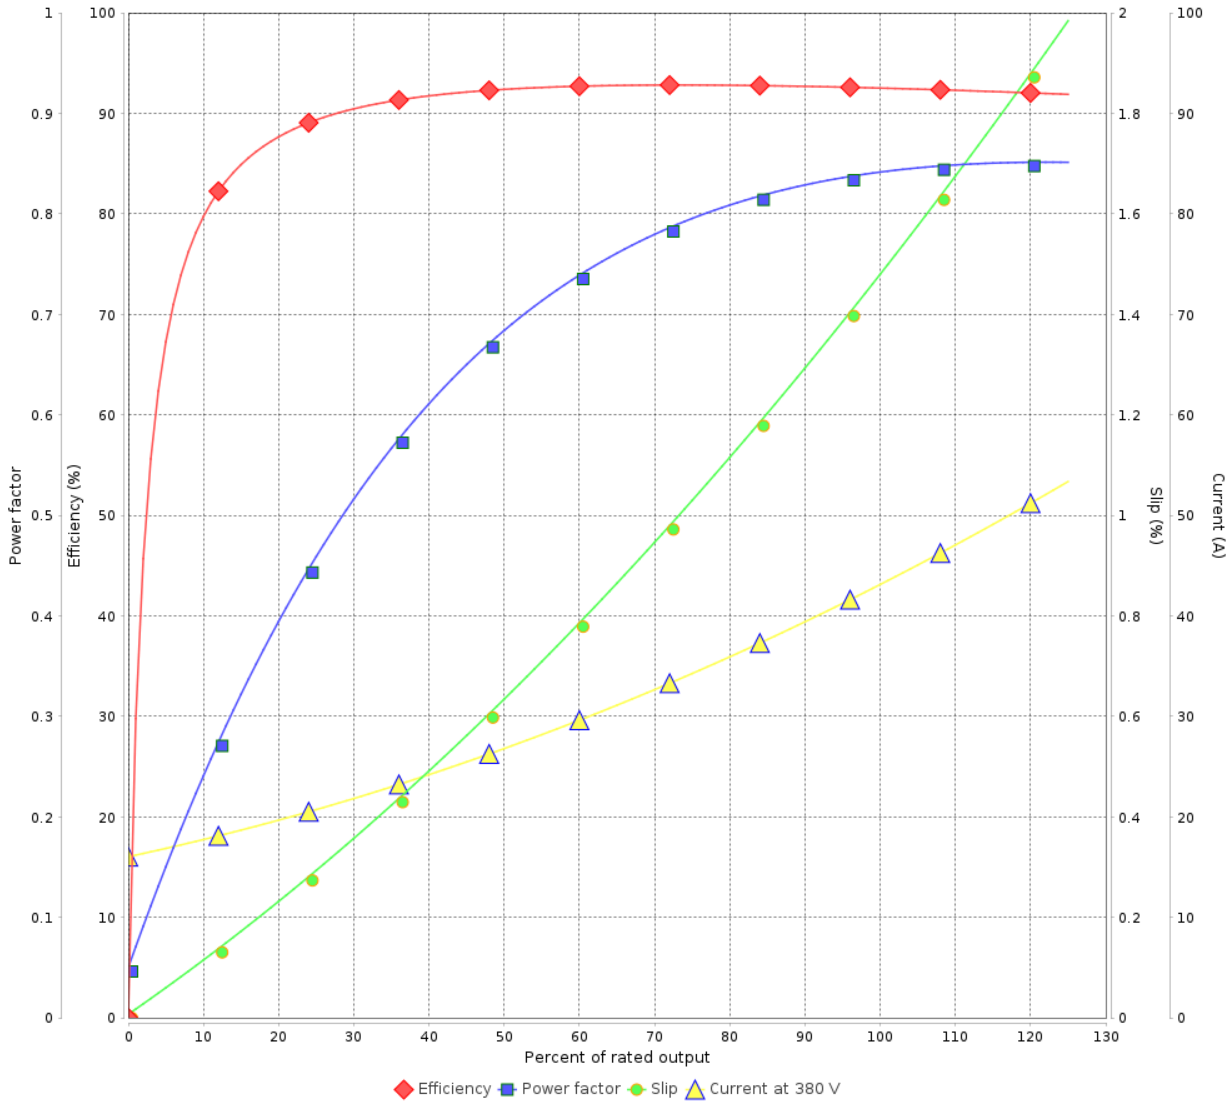

Performance : 380 V 50 Hz 6P IE3

Rated current	: 43.0 A	Moment of inertia (J)	: 0.9189 kgm ²
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 22.1 kgfm	Insulation class	: F
Locked rotor torque	: 210 %	Service factor	: 1.00
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 985 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 9	Revision
Checked by				
Date	21/10/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11165470

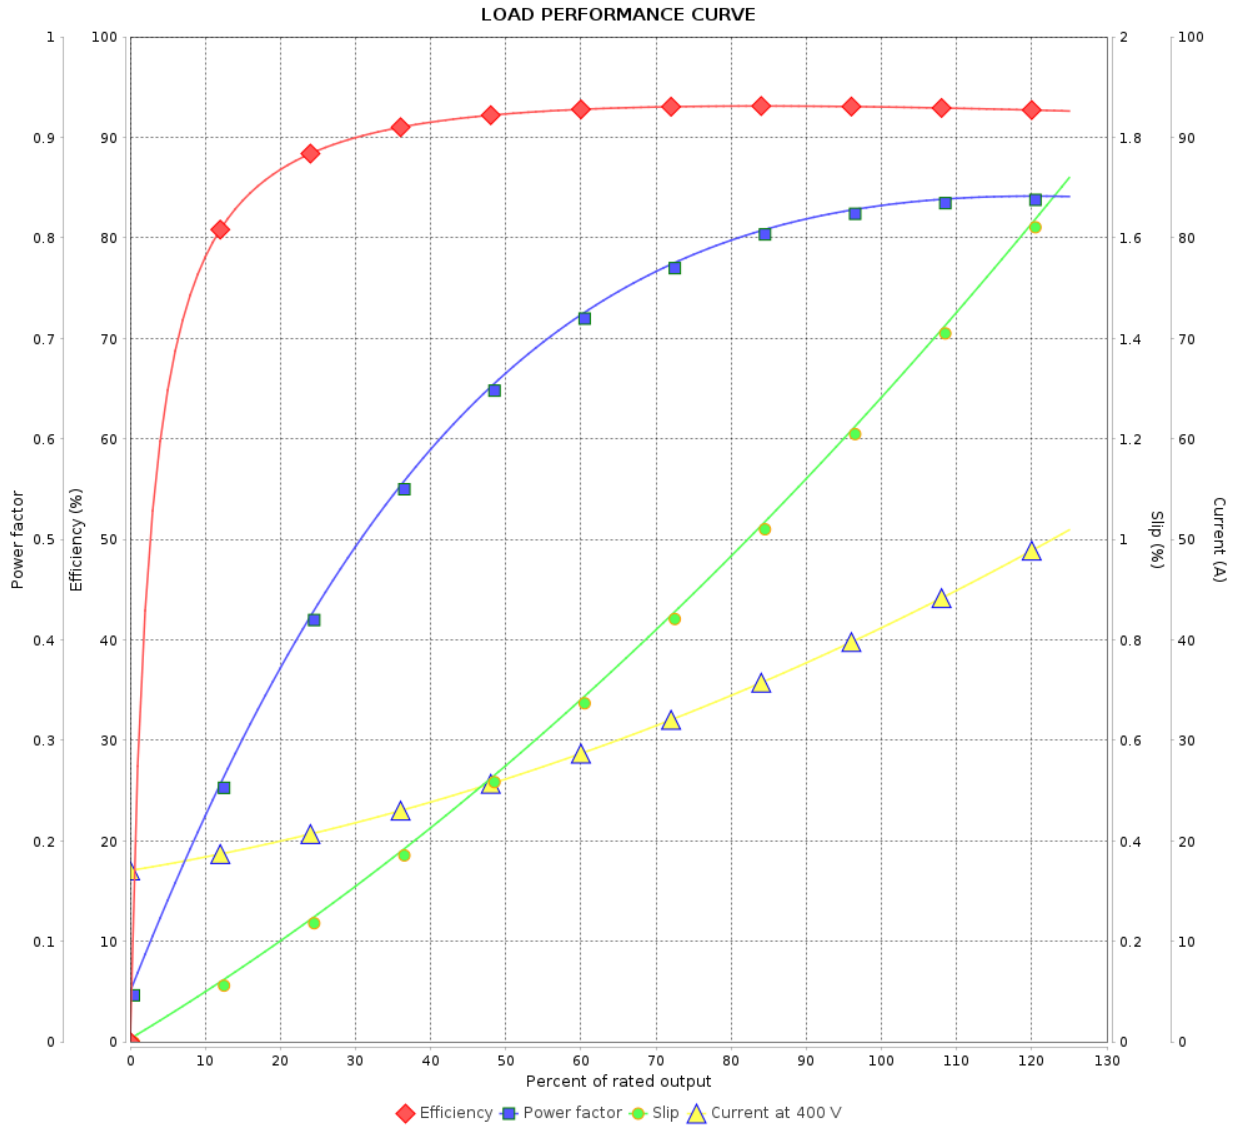

Performance : 400 V 50 Hz 6P IE3

Rated current	: 41.1 A	Moment of inertia (J)	: 0.9189 kgm ²
LRC	: 7.2	Duty cycle	: Cont.(S1)
Rated torque	: 22.1 kgfm	Insulation class	: F
Locked rotor torque	: 240 %	Service factor	: 1.00
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 987 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 9	Revision
Checked by				
Date	21/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11165470

LOAD PERFORMANCE CURVE

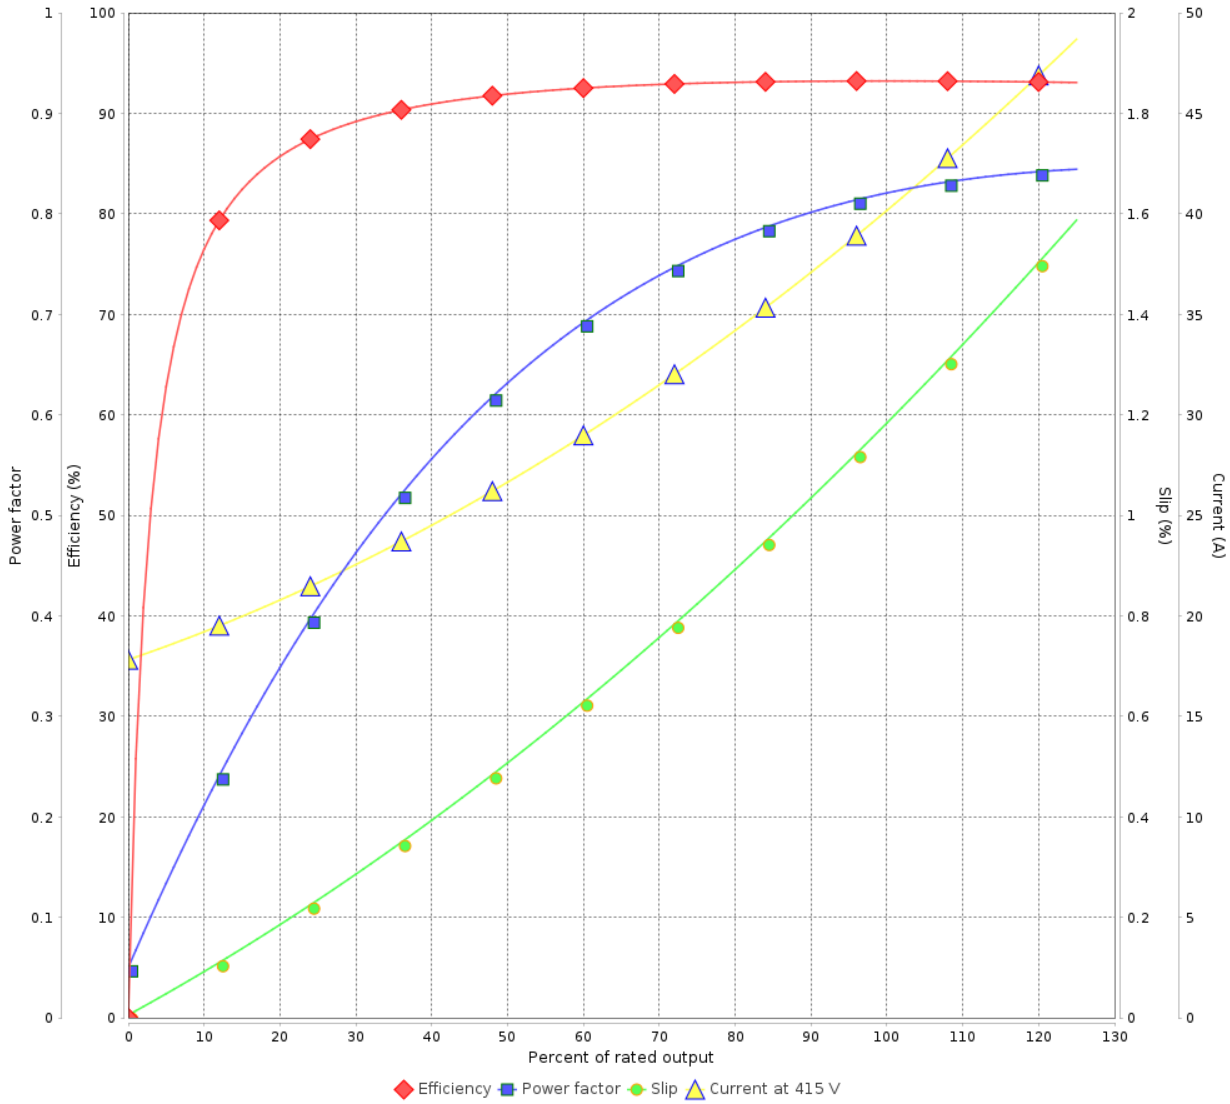

Performance : 415 V 50 Hz 6P IE3

Rated current : 40.0 A	Moment of inertia (J) : 0.9189 kgm ²
LRC : 7.7	Duty cycle : Cont.(S1)
Rated torque : 22.0 kgfm	Insulation class : F
Locked rotor torque : 270 %	Service factor : 1.00
Breakdown torque : 310 %	Temperature rise : 80 K
Rated speed : 988 rpm	Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 6 / 9	Revision
Checked by				
Date	21/10/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11165470

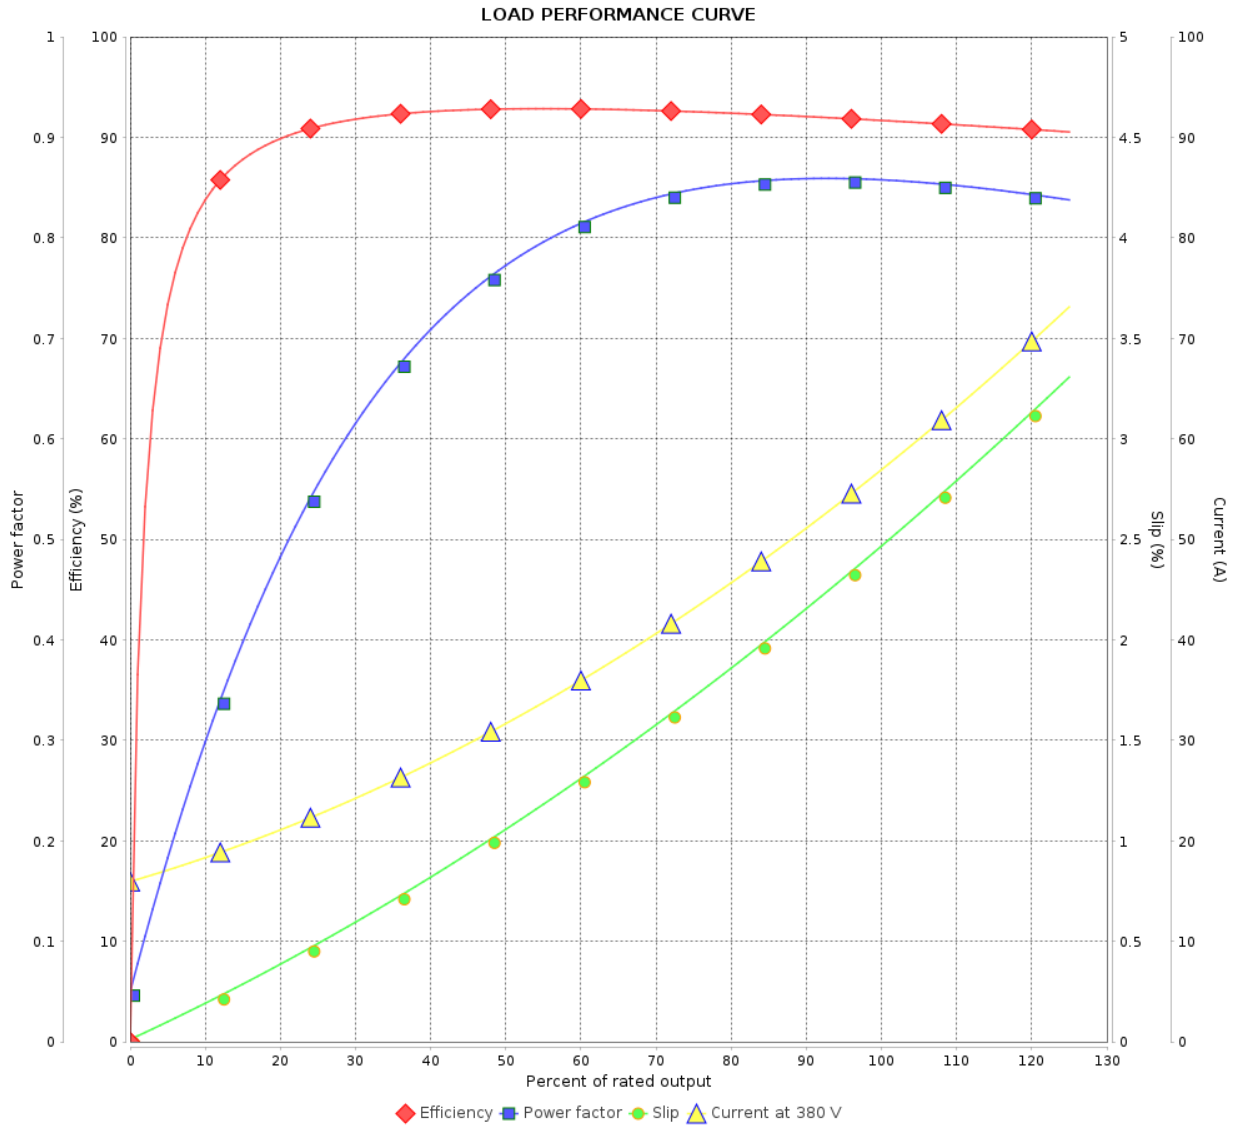

Performance : 380 V 50 Hz 6P IE2

Rated current	: 57.8 A	Moment of inertia (J)	: 0.9189 kgm ²
LRC	: 4.9	Duty cycle	: Cont.(S1)
Rated torque	: 29.8 kgfm	Insulation class	: F
Locked rotor torque	: 160 %	Service factor	: 1.00
Breakdown torque	: 190 %	Temperature rise	: 80 K
Rated speed	: 975 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 7 / 9	Revision
Checked by				
Date	21/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11165470

LOAD PERFORMANCE CURVE

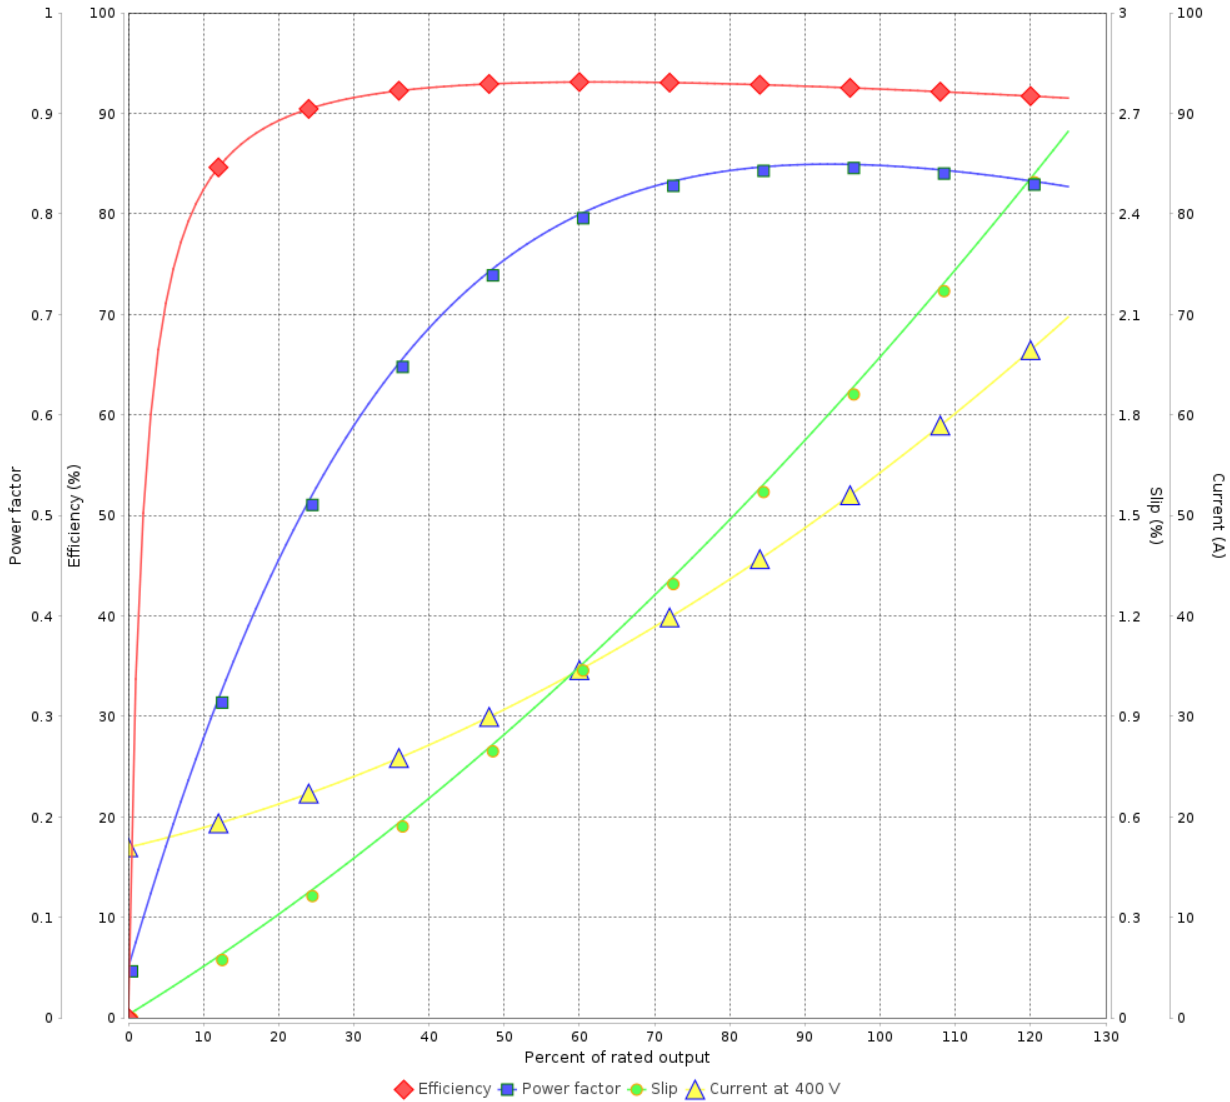

Performance : 400 V 50 Hz 6P IE2

Rated current	: 55.1 A	Moment of inertia (J)	: 0.9189 kgm ²
LRC	: 5.5	Duty cycle	: Cont.(S1)
Rated torque	: 29.6 kgfm	Insulation class	: F
Locked rotor torque	: 180 %	Service factor	: 1.00
Breakdown torque	: 210 %	Temperature rise	: 80 K
Rated speed	: 980 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 9	Revision
Checked by				
Date	21/10/2024			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :


Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11165470

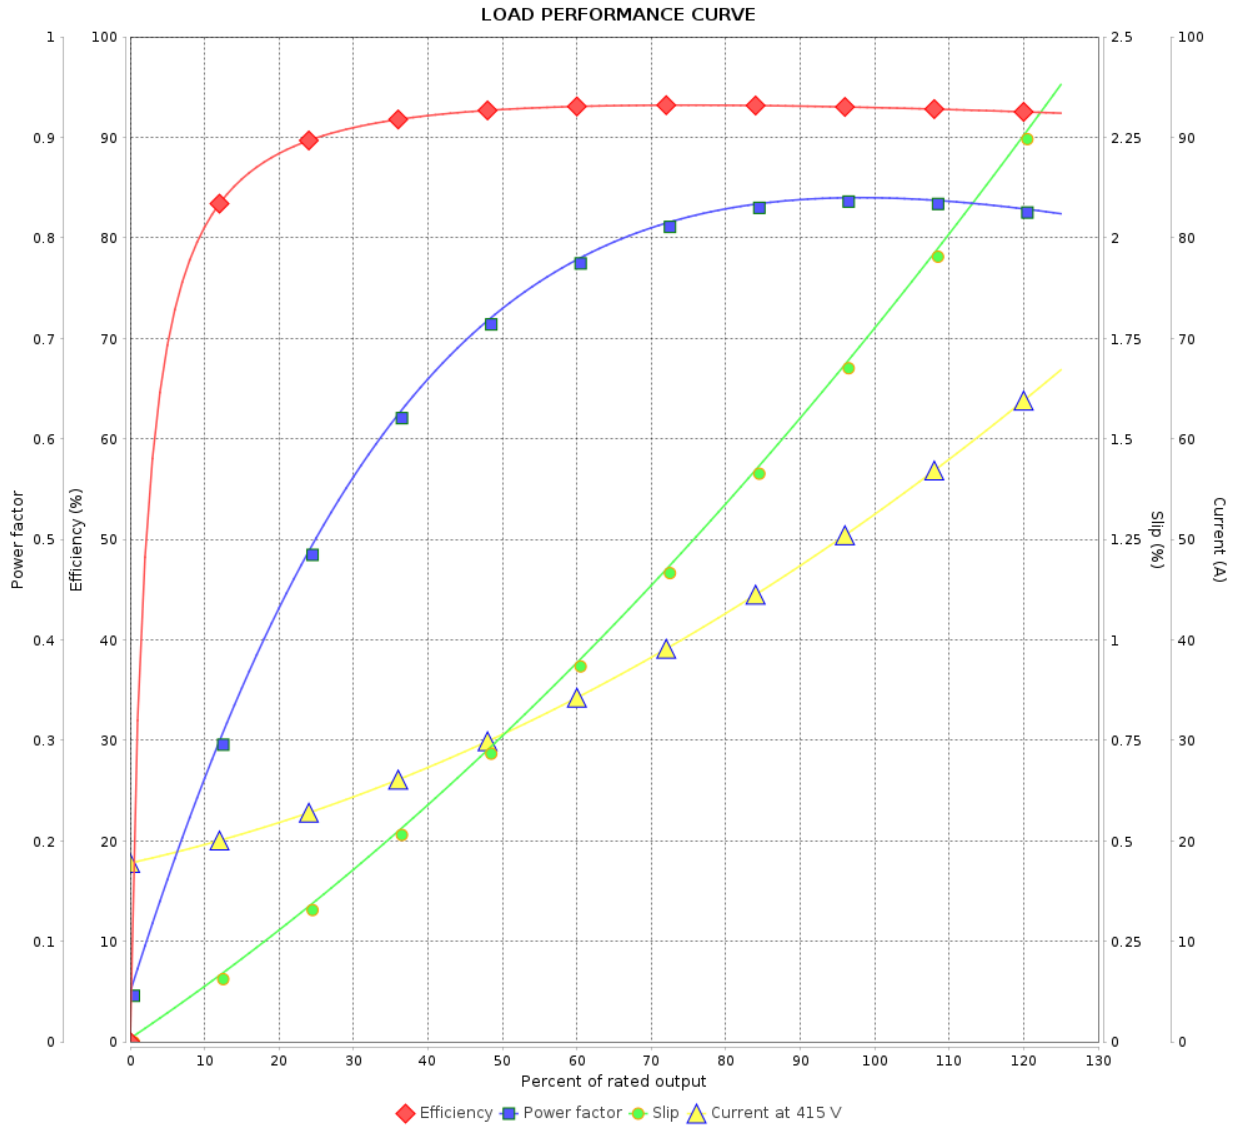

Performance : 415 V 50 Hz 6P IE3

Rated current	: 53.4 A	Moment of inertia (J)	: 0.9189 kgm ²
LRC	: 6.0	Duty cycle	: Cont.(S1)
Rated torque	: 29.6 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.00
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 982 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			9 / 9	
Date	21/10/2024			

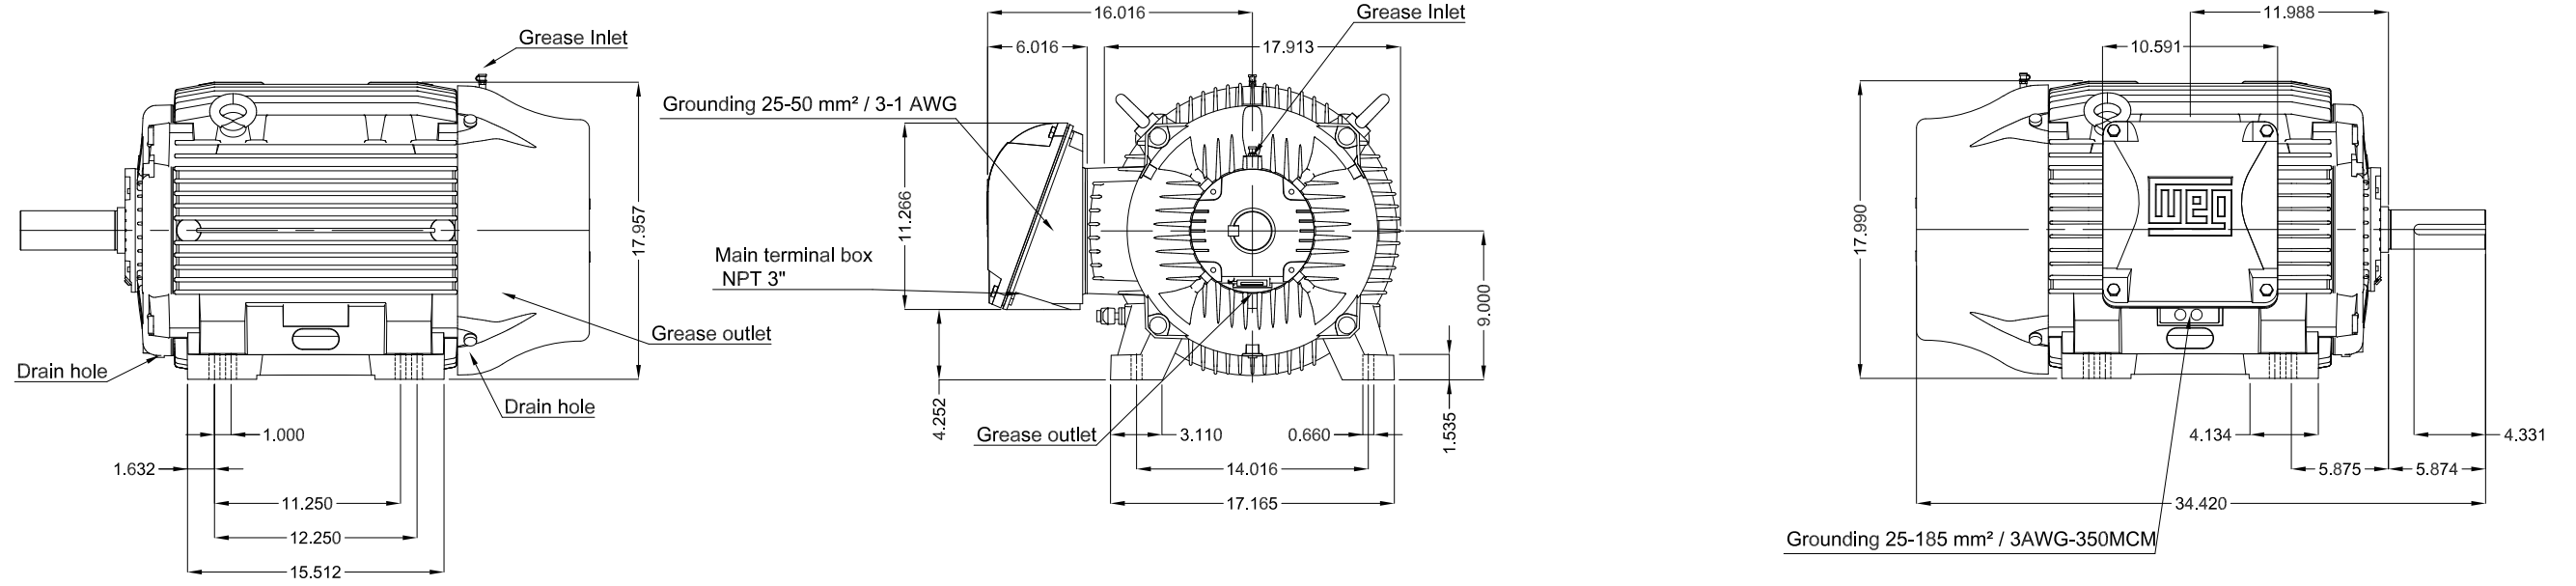

A


B

C

D

E

Without vertical jackscrews
 Color RAL 5009
 Painting plan 203A
 Mounting B3R(D)



40 HP 06 Poles 60 Hz A

ECM		LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR W22 NEMA PREM. EFF.					00
CHECKED			FRAME 364/5T IP55 TEFC					
RELEASED								
REL. DATE								

PREVIEW
 WDD 00
 SHEET /

