

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 High Efficiency Three-Phase Product code : 13133224

Frame	: 143/5TZ	Locked rotor time	: 54s (cold) 30s (hot)
Output	: 0.5 HP (0.37 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 0.625 A	Protection degree	: IP55
L. R. Amperes	: 5.50 A	Cooling method	: IC411 - TEFC
LRC	: 8.8x(Code M)	Mounting	: F-1
No load current	: 0.400 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1765 rpm	Starting method	: Direct On Line
Slip	: 1.94 %	Approx. weight <sup>3</sup>	: 20.0 kg
Rated torque	: 0.206 kgfm		
Locked rotor torque	: 280 %		
Breakdown torque	: 400 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0046 kgm <sup>2</sup>		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	74.0	79.0	82.5	Max. traction	: 13 kgf
Power Factor	0.00	0.50	0.62	0.72	Max. compression	: 33 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6205 C3	6204 C3
Sealing	:	Taconite Labyrinth	Taconite Labyrinth
Lubrication interval	:	20000 h	20000 h
Lubricant amount	:	4 g	4 g
Lubricant type	:	Mobil Polyrex EM	

### Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2Revision		
Checked by				
Date	21/10/2024			


# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 High Efficiency Three-Phase Product code : 13133224

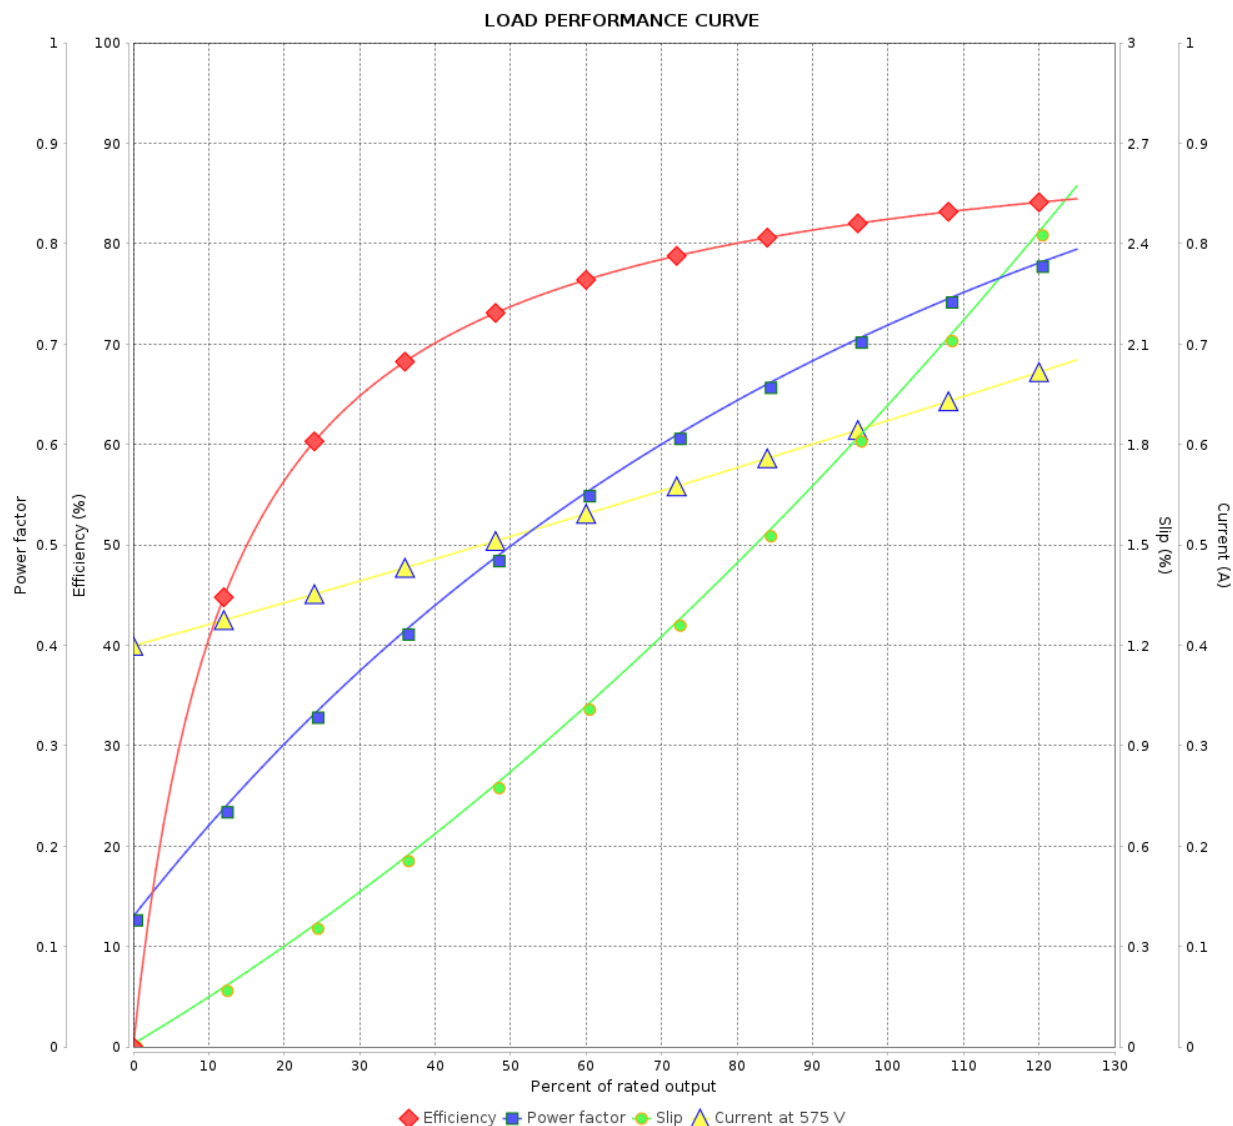

Performance : 575 V 60 Hz 4P

Rated current : 0.625 A  
LRC : 8.8  
Rated torque : 0.206 kgfm  
Locked rotor torque : 280 %  
Breakdown torque : 400 %  
Rated speed : 1765 rpm

Moment of inertia (J) : 0.0046 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.25  
Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2Revision		
Checked by				
Date	21/10/2024			

