## **DATA SHEET**



Three Phase Induction Motor - Squirrel Cage Customer Product line : W22 IEEE 841 NEMA Premium Product code: 12911192 Efficiency Three-Phase : 143/5T Locked rotor time Frame : 32s (cold) 18s (hot) Output : 1 HP (0.75 kW) Temperature rise : 80 K Poles : 4 Duty cycle : Cont.(S1) : -20°C to +40°C Frequency : 60 Hz Ambient temperature : 1000 m.a.s.l. Rated voltage : 575 V Altitude Rated current : 1.18 A Protection degree : IP55 : IC411 - TEFC L. R. Amperes : 10.1 A Cooling method **LRC** : 8.6x(Code M) Mounting : F-1 : Both (CW and CCW) No load current : 0.752 A Rotation<sup>1</sup> Rated speed : 1760 rpm Noise level<sup>2</sup> : 51.0 dB(A) Slip : 2.22 % Starting method : Direct On Line Rated torque : 0.412 kgfm Approx. weight<sup>3</sup> : 21.6 kg Locked rotor torque : 290 % Breakdown torque : 350 % : F Insulation class Service factor : 1.25 Moment of inertia (J) : 0.0049 kgm<sup>2</sup> Design : B 50% 75% Output 100% Foundation loads Efficiency (%) 0.08 84.0 85.5 Max. traction : 30 kgf Power Factor 0.55 0.68 0.75 Max. compression : 52 kgf Losses at normative operating points (speed;torque), in percentage of rated output power P2 (0,5;1,0) P4 (0,9;0,5) P1 (0,9;1,0) P3 (0,25;1,0) P5 (0,5;0,5) P6 (0,5;0,25) P7 (0,25;0,25) 15.9 12.8 12.5 10.1 7.0 5.8 4.3 Drive end Non drive end Bearing type 6205 C3 6204 C3 Sealing Taconite Labyrinth Taconite Labyrinth 20000 h 20000 h Lubrication interval Lubricant amount 4 g 4 g Lubricant type Mobil Polyrex EM Notes This revision replaces and cancel the previous one, which These are average values based on tests with sinusoidal must be eliminated. power supply, subject to the tolerances stipulated in NEMA (1) Looking the motor from the shaft end. MG-1. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process.

(4) At 100% of fu	III load.				
Rev.		Changes Summary	Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	22/10/2024	1		1/2	

## LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 IEEE 841 NEMA Premium

Efficiency Three-Phase

Product code: 12911192

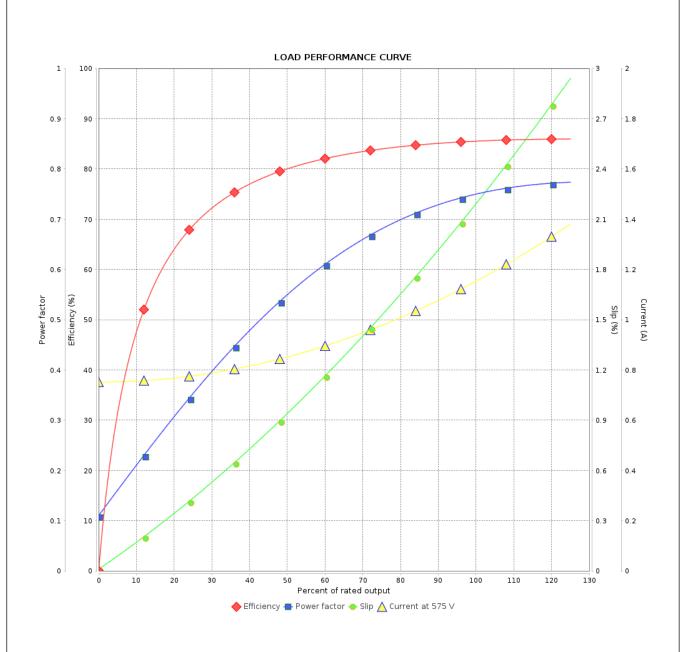

Danfarman	. EZE V CO LI- 4D				
Performance	: 575 V 60 Hz 4P				
Rated current LRC Rated torque Locked rotor torque Breakdown torque Rated speed	: 1.18 A : 8.6 : 0.412 kgfm : 290 % : 350 % : 1760 rpm	Moment of inertia (J) Duty cycle Insulation class Service factor Temperature rise Design	: 0.0049 kgm : Cont.(S1) : F : 1.25 : 80 K : B	: F : 1.25 : 80 K	
Rev.	Changes Summary	Perform	ed Checked	Date	
Performed by					
Checked by			Page	Revision	

2/2

22/10/2024

Date

