

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11939472

Frame	: 213/5T	Locked rotor time	: 79s (cold) 44s (hot)
Output	: 3 HP (2.2 kW)	Temperature rise	: 80 K
Poles	: 8	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 3.69 A	Protection degree	: IP55
L. R. Amperes	: 25.1 A	Cooling method	: IC411 - TEFC
LRC	: 6.8x(Code K)	Mounting	: F-1
No load current	: 2.40 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 870 rpm	Noise level ²	: 52.0 dB(A)
Slip	: 3.33 %	Starting method	: Direct On Line
Rated torque	: 2.50 kgfm	Approx. weight ³	: 85.6 kg
Locked rotor torque	: 220 %		
Breakdown torque	: 300 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0888 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	84.0	85.5	85.5	Max. traction	: 96 kgf
Power Factor	0.49	0.62	0.70	Max. compression	: 181 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
19.1	18.2	17.9	9.5	7.8	5.8	4.5

	Drive end	Non drive end
Bearing type	: 6308 C3	: 6207 C3
Sealing	: Taconite Labyrinth	: Taconite Labyrinth
Lubrication interval	: 20000 h	: 20000 h
Lubricant amount	: 11 g	: 7 g
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	22/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11939472




LOAD PERFORMANCE CURVE

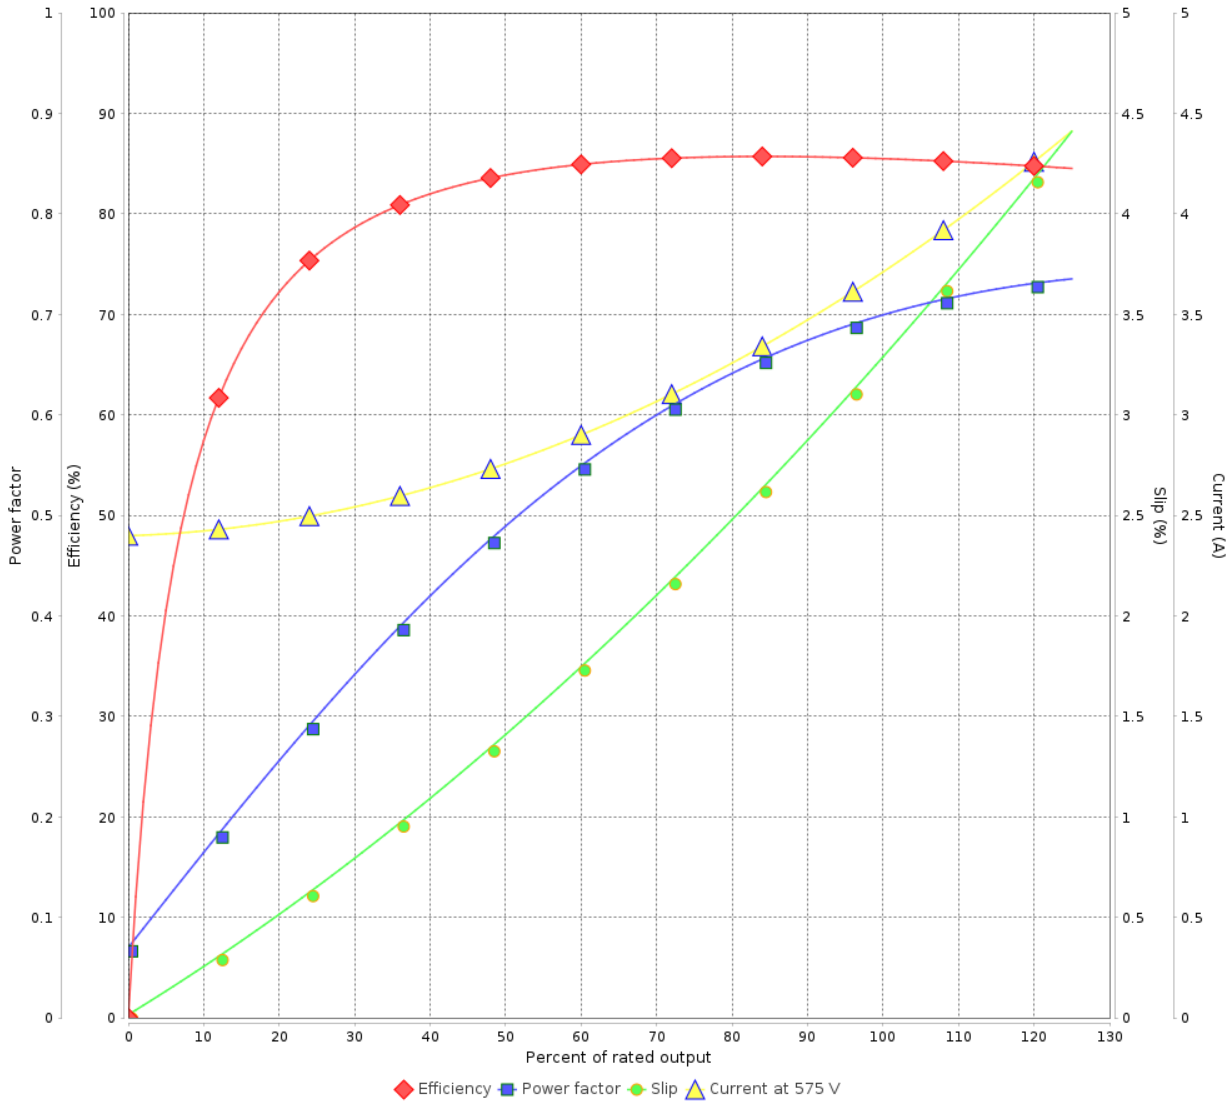


Performance : 575 V 60 Hz 8P

Rated current	: 3.69 A	Moment of inertia (J)	: 0.0888 kgm ²
LRC	: 6.8	Duty cycle	: Cont.(S1)
Rated torque	: 2.50 kgfm	Insulation class	: F
Locked rotor torque	: 220 %	Service factor	: 1.25
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 870 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	22/10/2024			

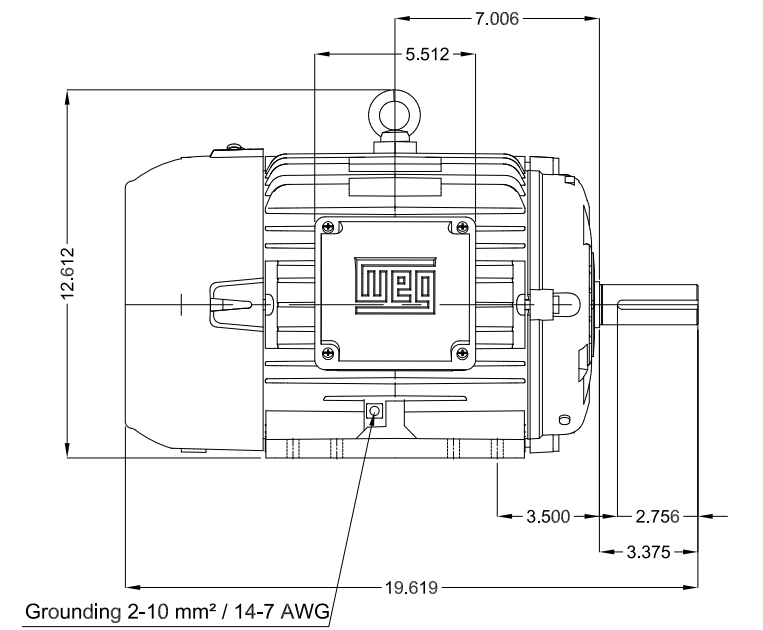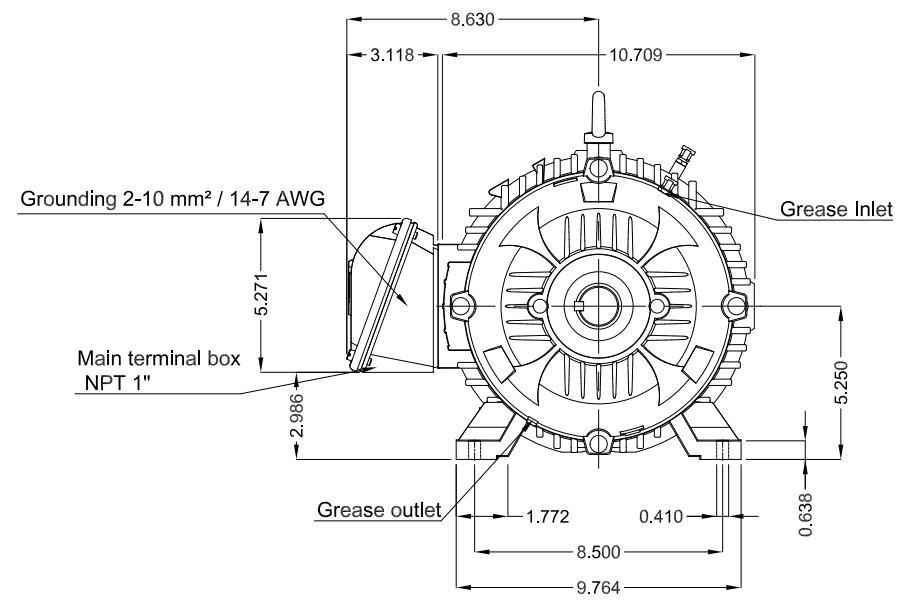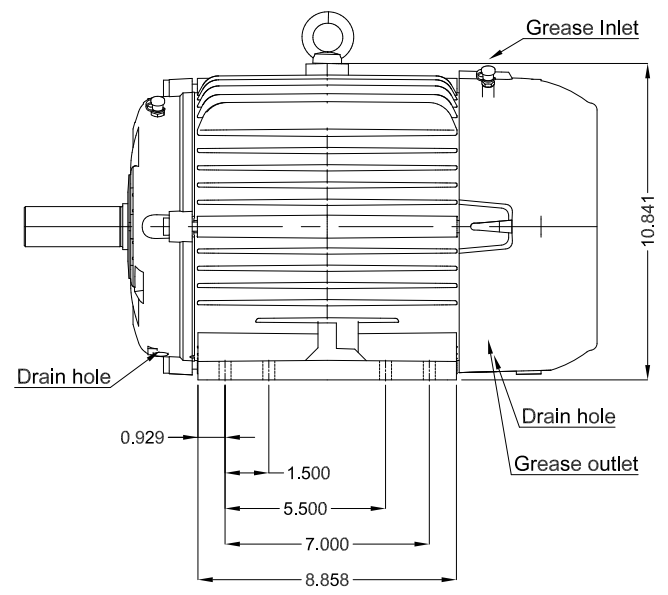

Sealing - Taconite labyrinth
Grease outlet according to IEEE841
Color RAL 5009
Painting plan 202E
Mounting B3R(D)



3 HP 08 Poles 60 Hz											A	
HYBRISUSER											00	
ECM	LOC	SUMMARY OF MODIFICATIONS						EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR IEEE 841 W22 NEMA PREM. EFF.						EXECUTED	CHECKED	RELEASED	DATE	VER
CHECKED		FRAME 213/5T IP55 TEFC										
RELEASED												
REL. DATE												
								PREVIEW		WDD 00		
								SHEET /		/		

