

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium Efficiency Three-Phase Product code : 11431928

Frame	: 284/6TS	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 182 kg
Protection degree	: IP56	Moment of inertia (J)	: 0.1419 kgm ²
Design	: B		

Output [HP]	30	25	25	25	30	30	30
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	460	380	400	415	380	400	415
Rated current [A]	34.6	34.6	33.2	32.4	42.0	40.0	38.2
L. R. Amperes [A]	218	214	233	233	206	220	237
LRC [A]	6.3x(Code G)	6.2x(Code G)	7.0x(Code H)	7.2x(Code H)	4.9x(Code E)	5.5x(Code F)	6.2x(Code G)
No load current [A]	9.90	9.40	10.0	10.6	9.40	10.0	10.6
Rated speed [RPM]	3549	2946	2953	2957	2923	2938	2942
Slip [%]	1.42	1.80	1.57	1.43	2.57	2.07	1.93
Rated torque [kgfm]	6.13	6.16	6.14	6.14	7.45	7.41	7.40
Locked rotor torque [%]	240	220	250	229	180	200	220
Breakdown torque [%]	250	229	270	290	200	210	240
Service factor	1.25	1.00	1.00	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K	105 K	105 K	105 K
Locked rotor time	27s (cold) 15s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)	21s (cold) 12s (hot)
Noise level ²	72.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)	67.0 dB(A)
Efficiency (%)	25%						
	50%	91.7	91.0	91.1	91.2	89.0	91.0
	75%	91.7	91.5	91.5	91.8	89.5	91.0
	100%	91.7	92.4	92.4	92.4	89.5	91.0
Power Factor	25%						
	50%	0.77	0.80	0.76	0.74	0.83	0.78
	75%	0.85	0.86	0.84	0.82	0.88	0.85
	100%	0.87	0.88	0.87	0.86	0.89	0.88

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	8.5	7.7	7.7	7.7	11.0	10.2	9.3
	P2 (0,5;1,0)	6.7	6.1	6.1	6.1	8.6	8.0	7.3
	P3 (0,25;1,0)	6.4	5.8	5.8	5.8	8.3	7.7	7.0
	P4 (0,9;0,5)	4.2	3.8	3.8	3.8	5.5	5.1	4.6
	P5 (0,5;0,5)	2.5	2.3	2.3	2.3	3.3	3.0	2.8
	P6 (0,5;0,25)	1.6	1.4	1.4	1.4	2.0	1.9	1.7
	P7 (0,25;0,25)	1.0	0.9	0.9	0.9	1.2	1.1	1.0

Bearing type	: 6311 C3	Non drive end	6211 C3	Foundation loads	
Sealing	: Inpro/Seal	Inpro/Seal		Max. traction	: 163 kgf
Lubrication interval	: 14000 h	17000 h		Max. compression	: 345 kgf
Lubricant amount	: 18 g	11 g			
Lubricant type	: Mobil Polyrex EM				

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by						
Date	22/10/2024					

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 9	Revision
Checked by					
Date	22/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11431928

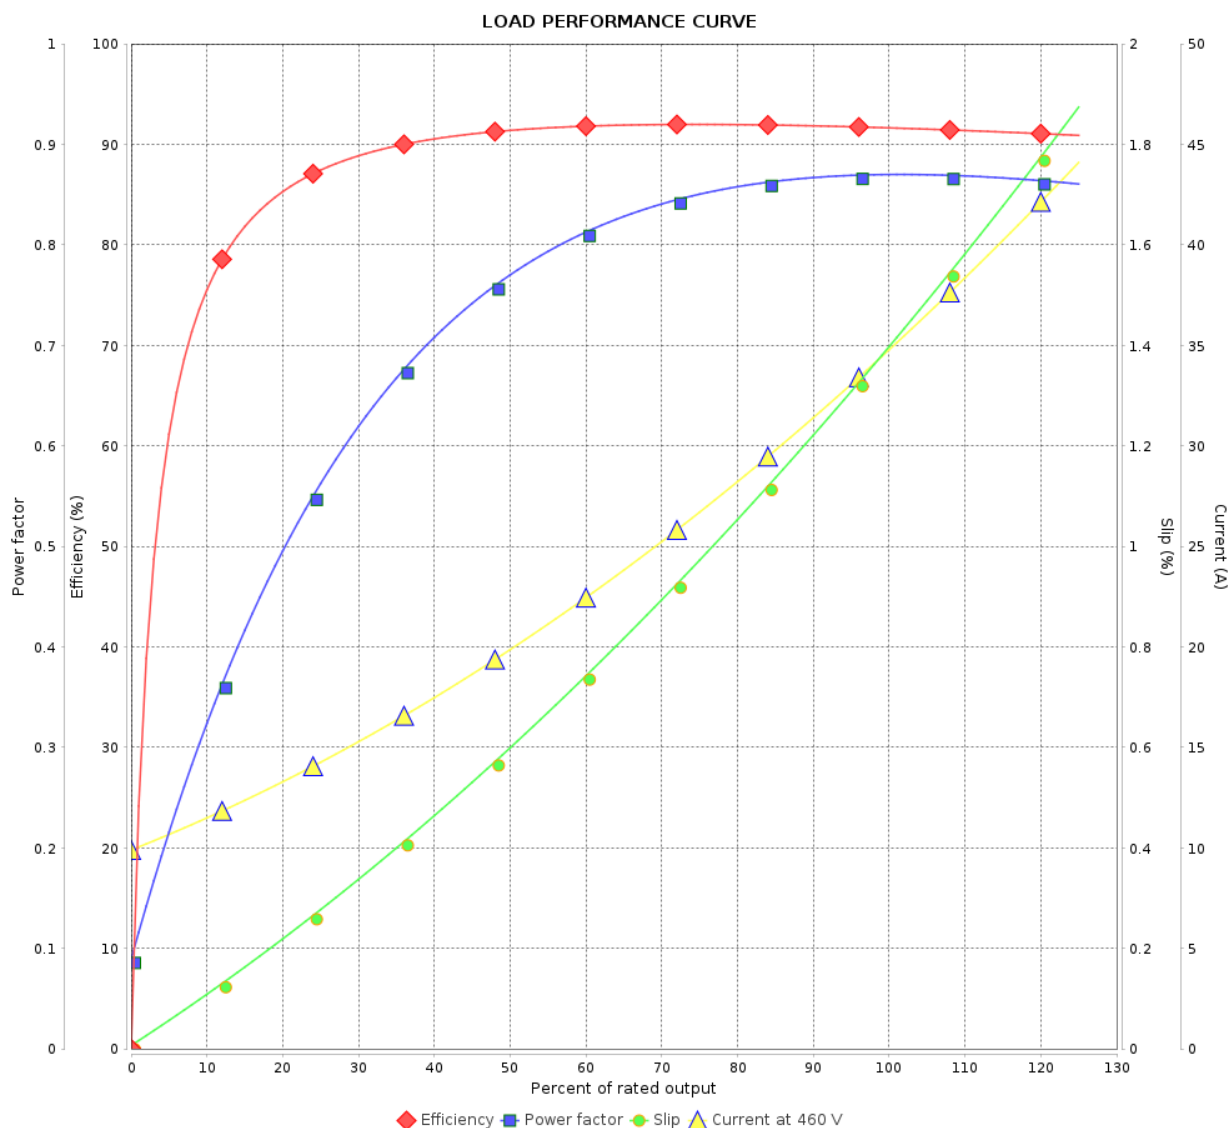

Performance : 460 V 60 Hz 2P

Rated current : 34.6 A
LRC : 6.3
Rated torque : 6.13 kgfm
Locked rotor torque : 240 %
Breakdown torque : 250 %
Rated speed : 3549 rpm

Moment of inertia (J) : 0.1419 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 9Revision		
Checked by				
Date	22/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11431928

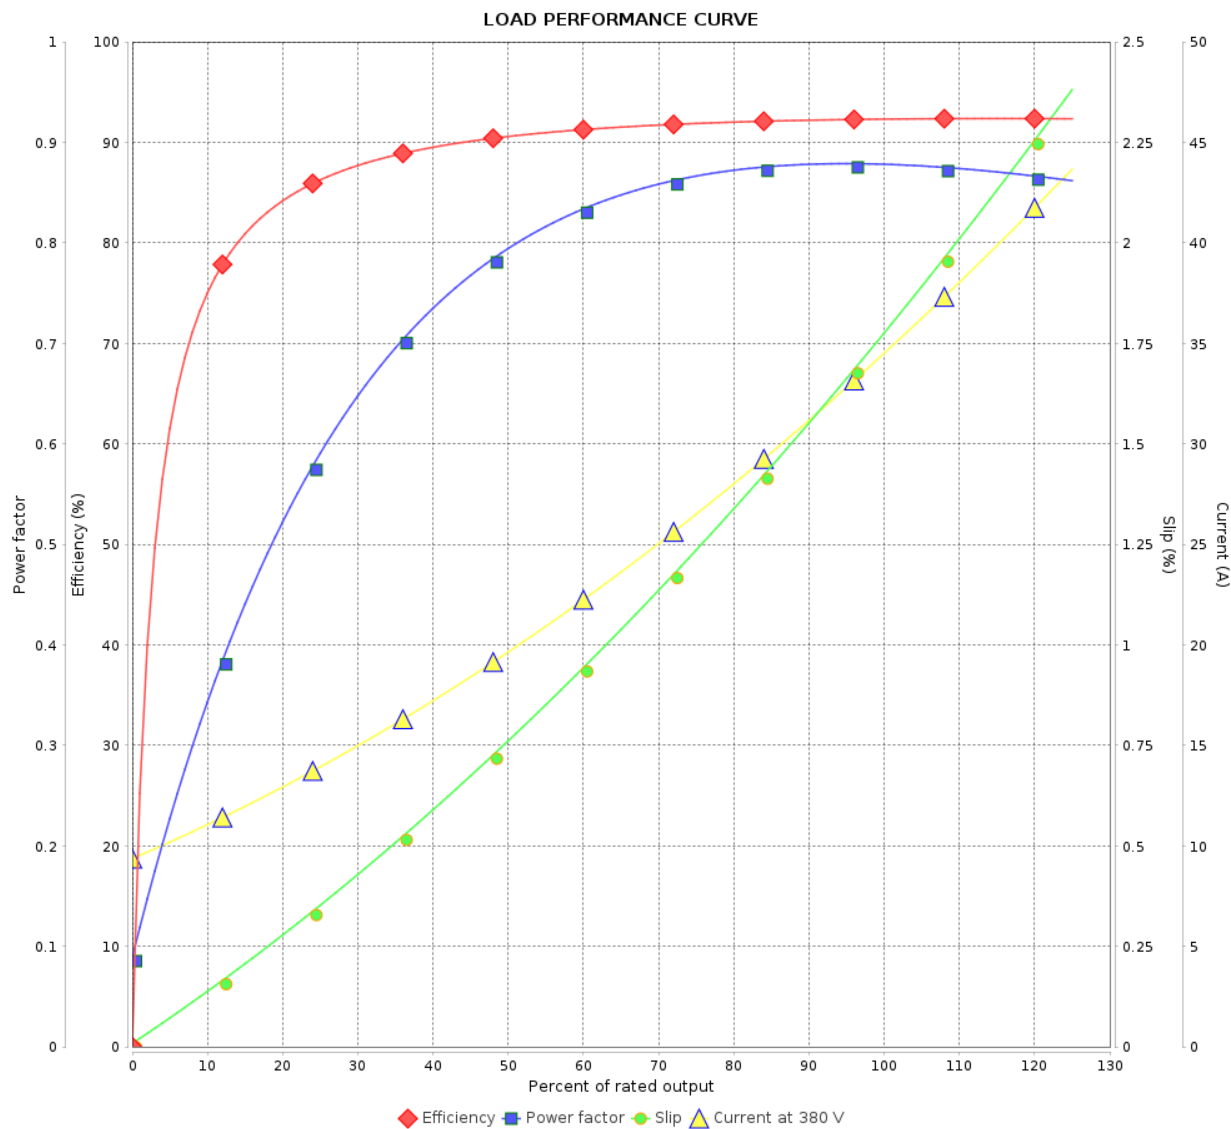

Performance : 380 V 50 Hz 2P IE3

Rated current : 34.6 A
LRC : 6.2
Rated torque : 6.16 kgfm
Locked rotor torque : 220 %
Breakdown torque : 229 %
Rated speed : 2946 rpm

Moment of inertia (J) : 0.1419 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 4 / 9Revision		
Checked by				
Date	22/10/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11431928

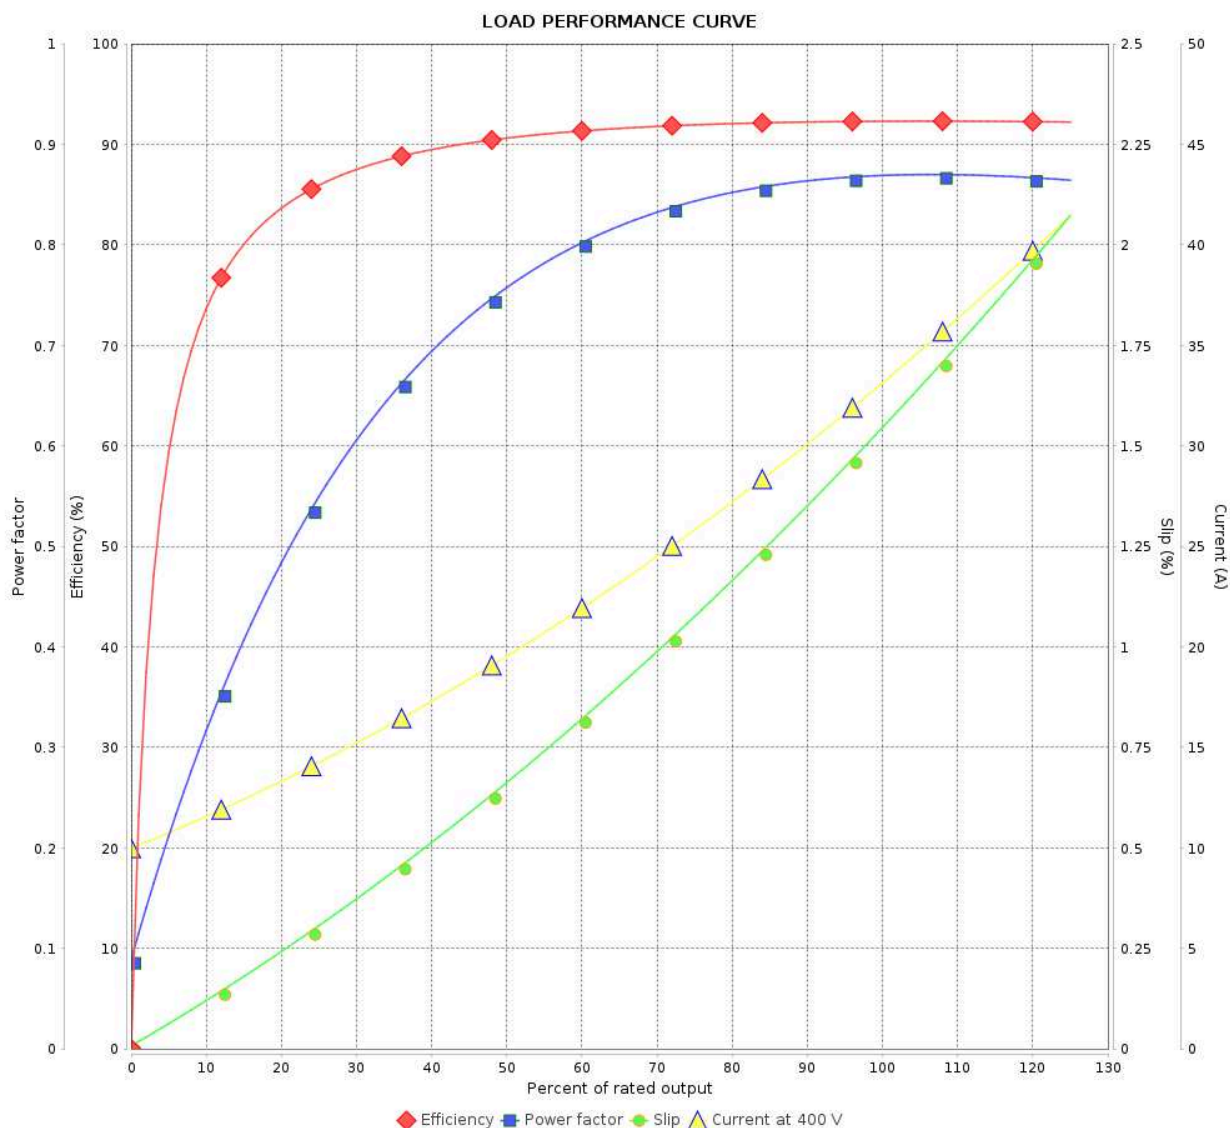

Performance : 400 V 50 Hz 2P IE3

Rated current : 33.2 A
LRC : 7.0
Rated torque : 6.14 kgfm
Locked rotor torque : 250 %
Breakdown torque : 270 %
Rated speed : 2953 rpm

Moment of inertia (J) : 0.1419 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	22/10/2024			

Page
5 / 9

Revision

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11431928

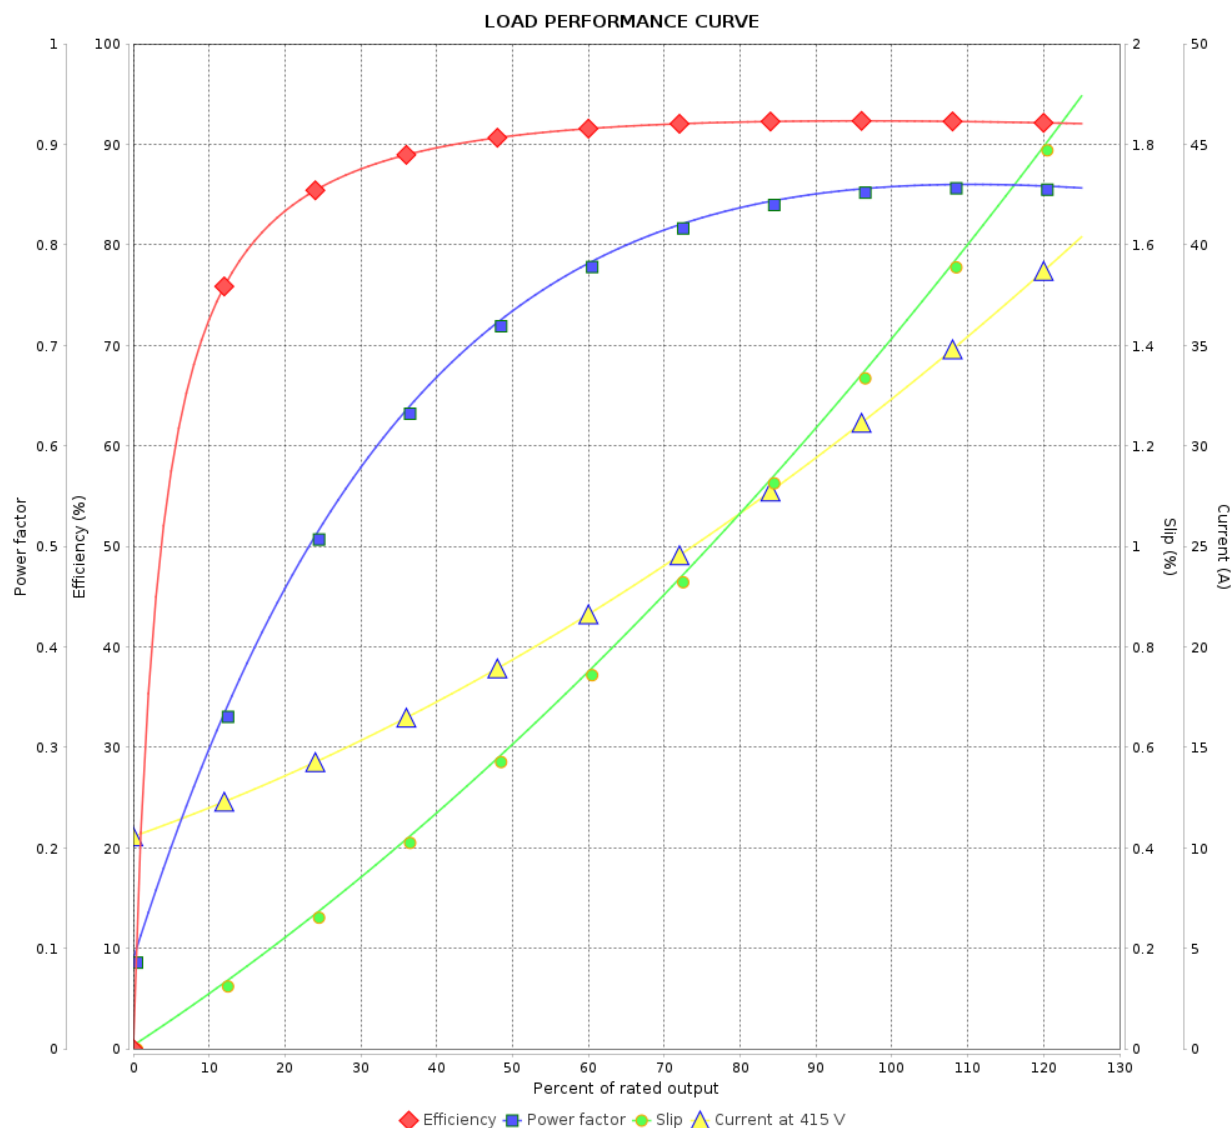

Performance : 415 V 50 Hz 2P IE3

Rated current : 32.4 A
LRC : 7.2
Rated torque : 6.14 kgfm
Locked rotor torque : 229 %
Breakdown torque : 290 %
Rated speed : 2957 rpm

Moment of inertia (J) : 0.1419 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				6 / 9	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11431928

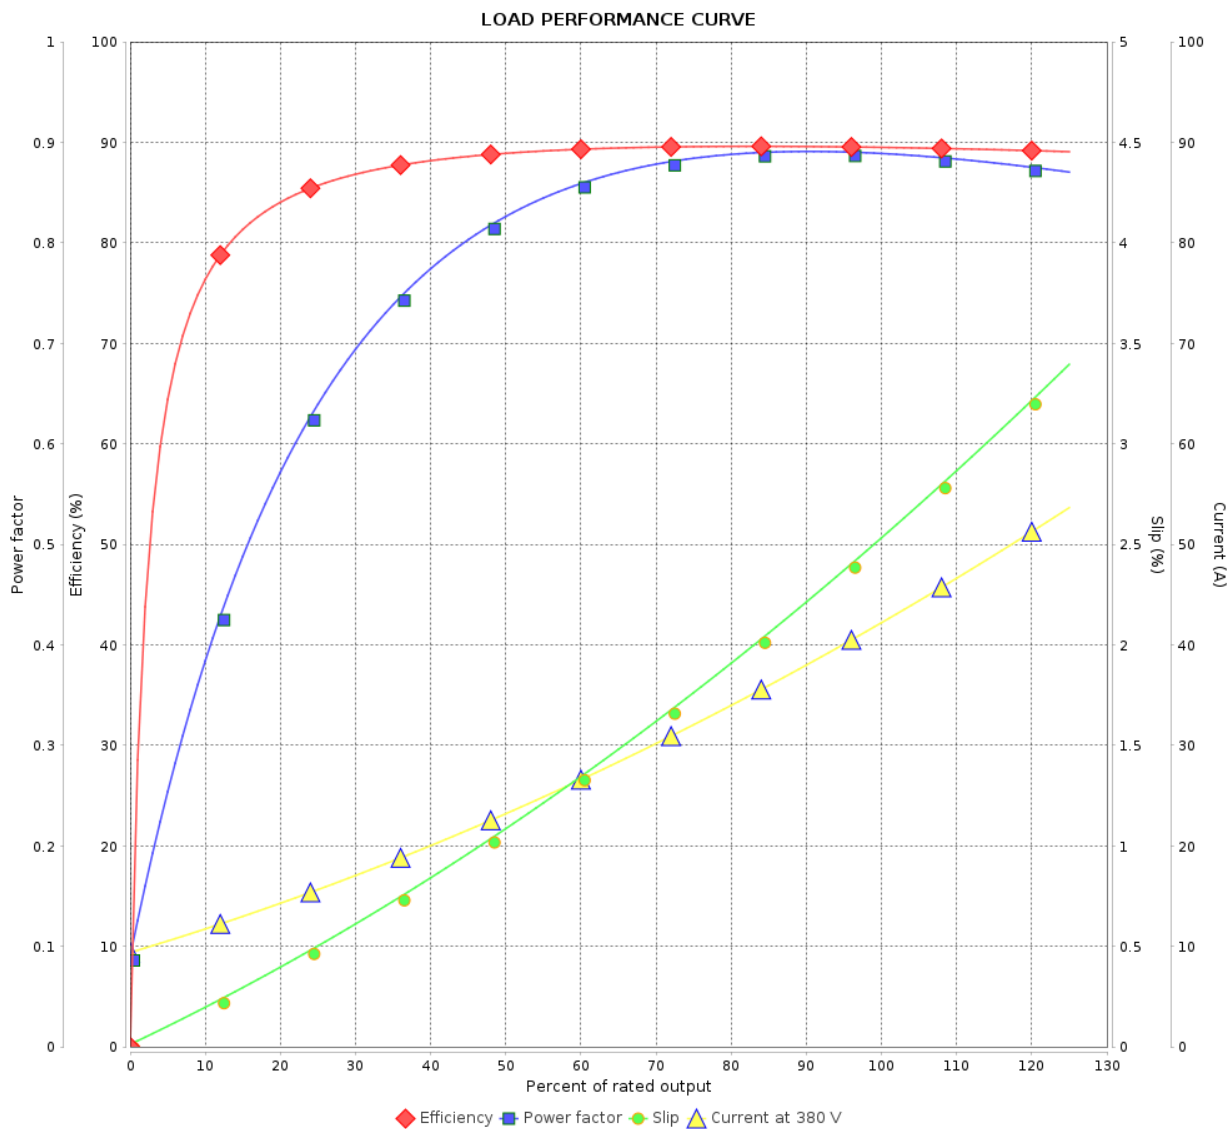

Performance : 380 V 50 Hz 2P

Rated current : 42.0 A
LRC : 4.9
Rated torque : 7.45 kgfm
Locked rotor torque : 180 %
Breakdown torque : 200 %
Rated speed : 2923 rpm

Moment of inertia (J) : 0.1419 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 7 / 9	Revision
Checked by					
Date	22/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11431928

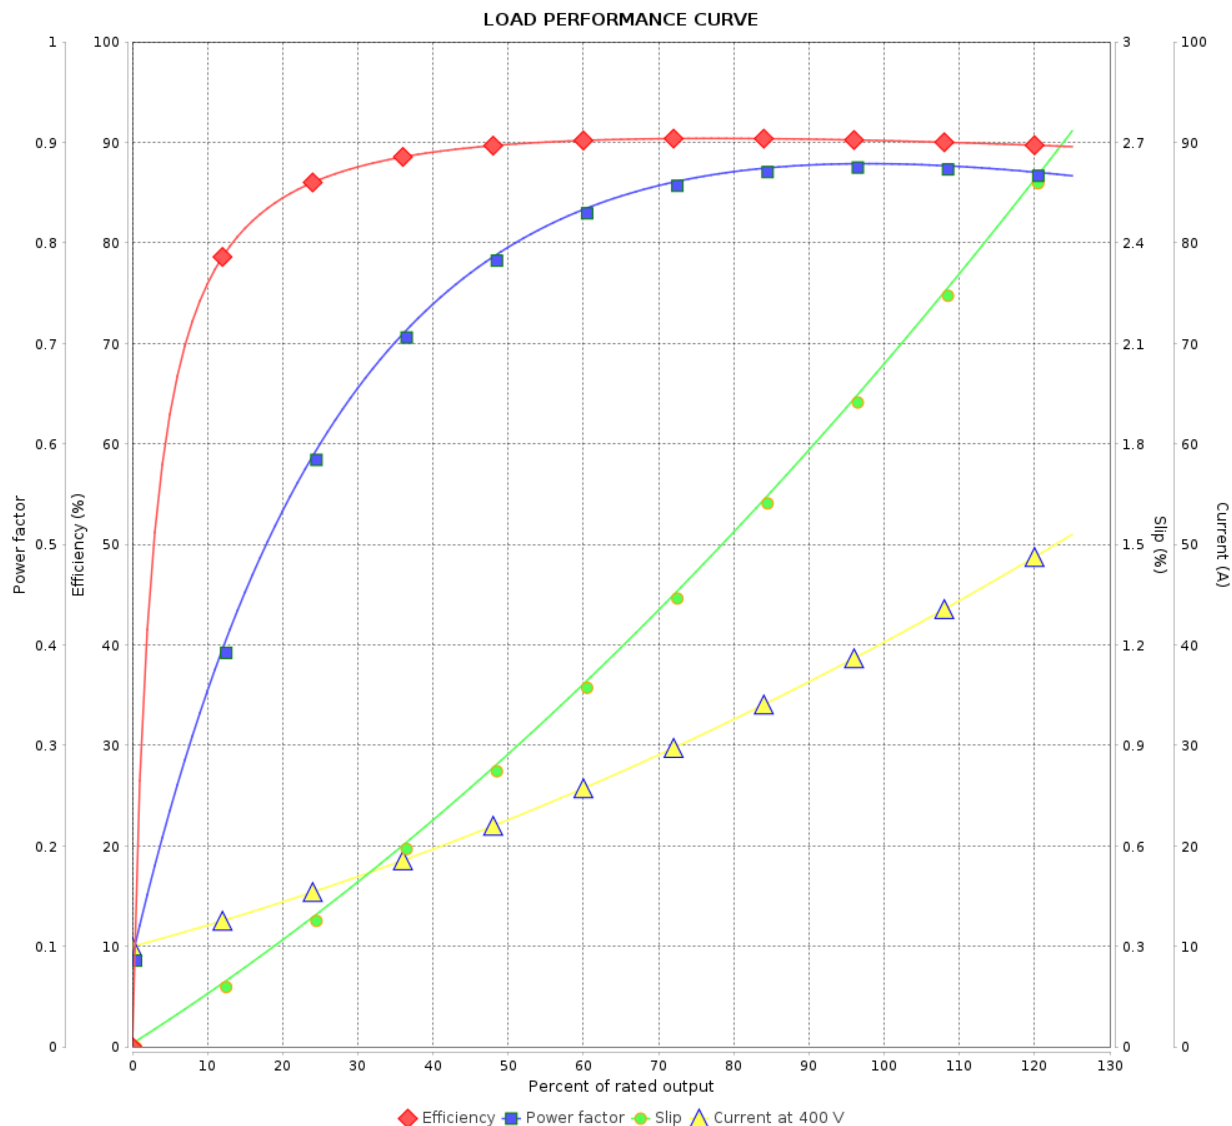

Performance : 400 V 50 Hz 2P IE1

Rated current : 40.0 A
LRC : 5.5
Rated torque : 7.41 kgfm
Locked rotor torque : 200 %
Breakdown torque : 210 %
Rated speed : 2938 rpm

Moment of inertia (J) : 0.1419 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 8 / 9Revision	
Checked by					
Date	22/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IEEE 841 NEMA Premium
Efficiency Three-Phase

Product code : 11431928


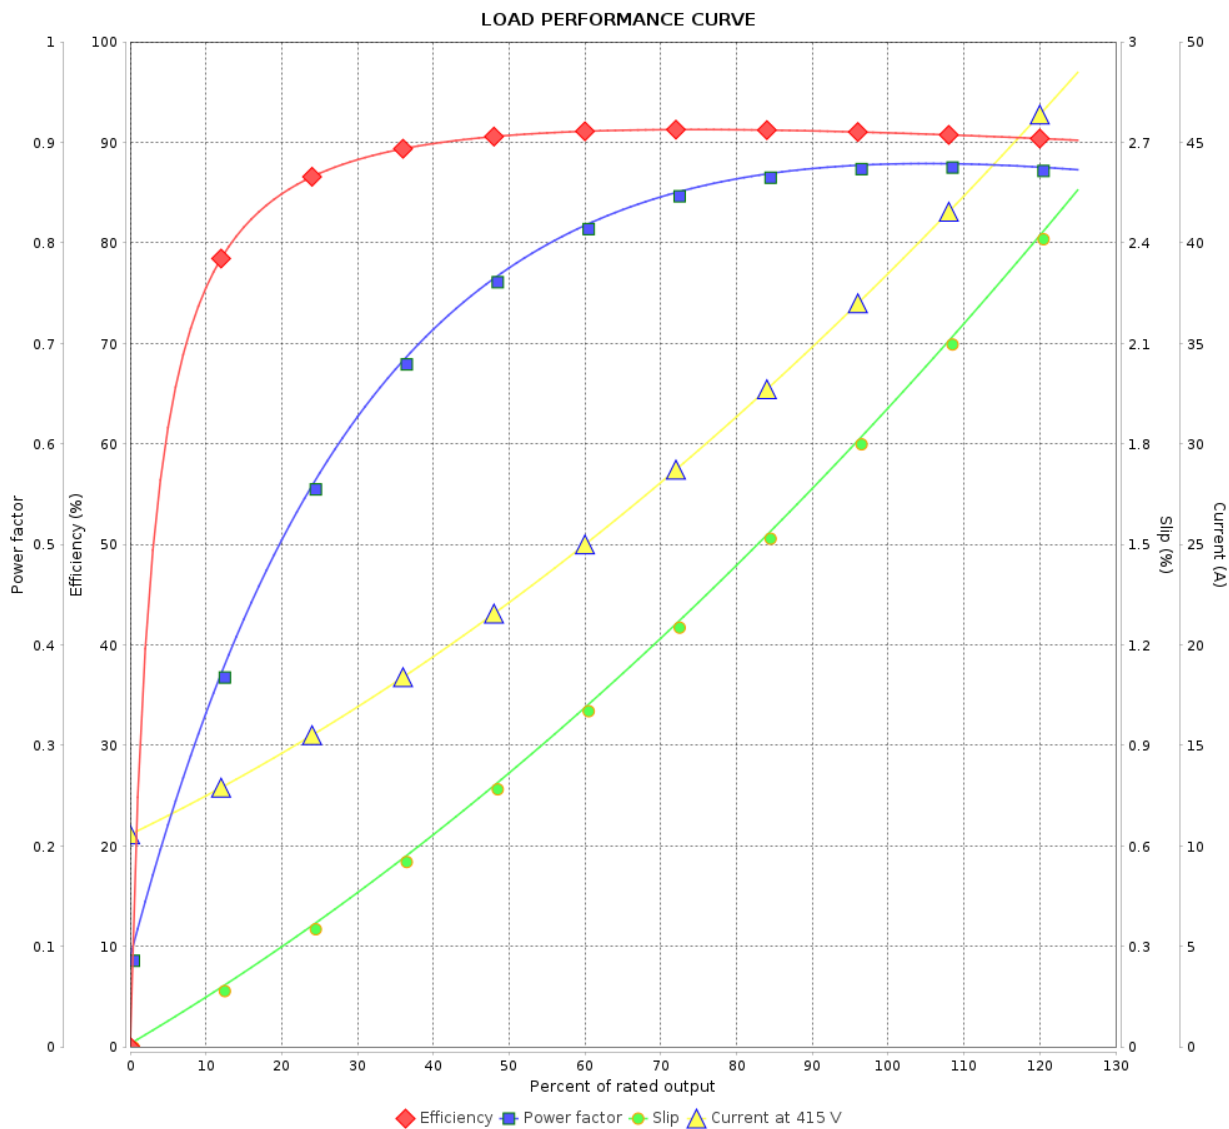


Performance : 415 V 50 Hz 2P IE1


Rated current : 38.2 A
LRC : 6.2
Rated torque : 7.40 kgfm
Locked rotor torque : 220 %
Breakdown torque : 240 %
Rated speed : 2942 rpm

Moment of inertia (J) : 0.1419 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 105 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 9 / 9Revision		
Checked by				
Date	22/10/2024			

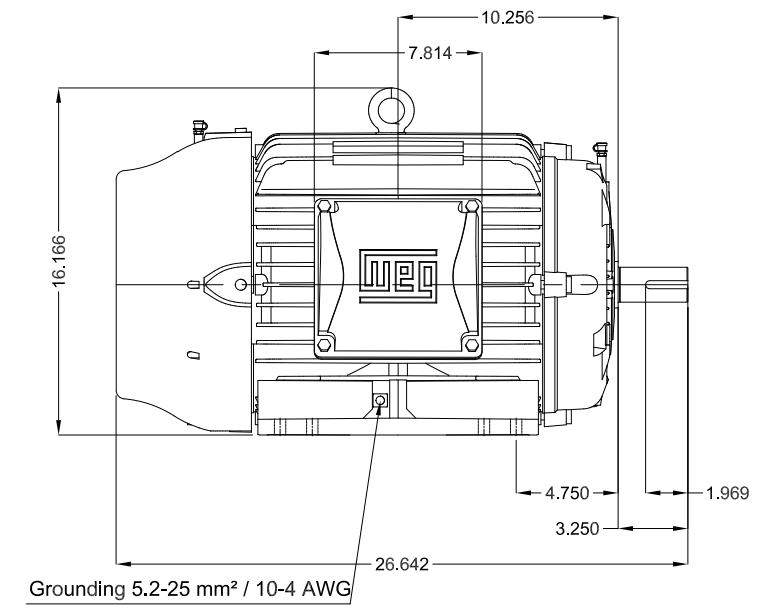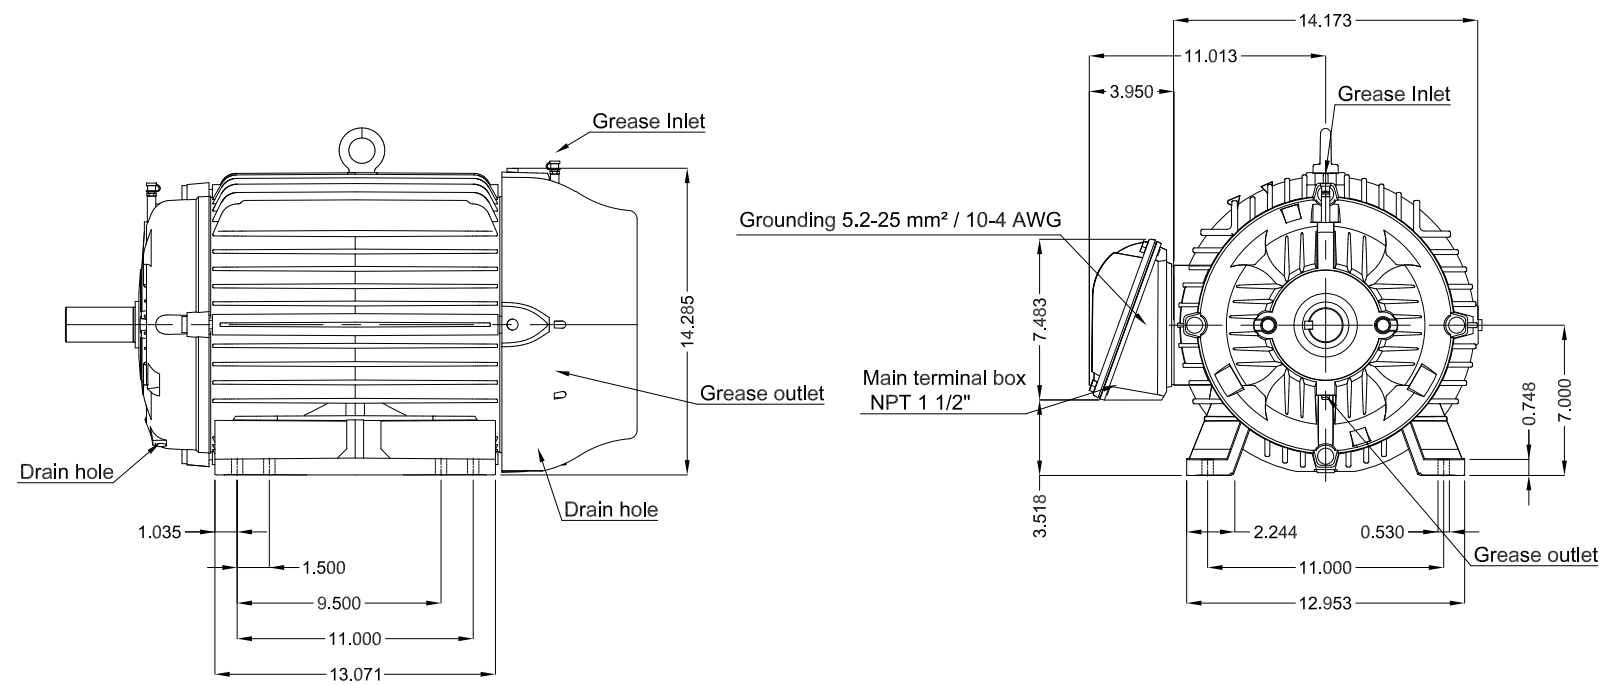

Grease outlet according to IEEE841
Color RAL 5009
Painting plan 202E
Mounting B3R(D)



30 HP 02 Poles 60 Hz											A			
									HYBRISUSER			00		
ECM		LOC		SUMMARY OF MODIFICATIONS					EXECUTED		CHECKED	RELEASED	DATE	VER
EXECUTED		HYBRISUSER				THREE PH. MOTOR IEEE 841 W22 NEMA PREM. EFF. FRAME 284/6TS IP56 TEFC					PREVIEW WDD 00			
CHECKED														
RELEASED														
REL. DATE														
						SHEET								