DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase

Product code : 13924889

Frame	: 254/6T	Locked rotor time	: 37s (cold) 21s (hot)
Output	: 15 HP (11 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 36.0/18.0 A	Protection degree	: IP55
L. R. Amperes	: 230/115 A	Cooling method	: IC411 - TEFC
LRC	: 6.4x(Code G)	Mounting	: F-1
No load current	: 14.6/7.30 A	Rotation[1]	: Both (CW and CCW)
Rated speed	: 1770 rpm	Noise level[2]	: 64.0 dB(A)
Slip	: 1.67 %	Vibration	: A
Rated torque	: 6 kgfm	Starting method	: Direct On Line
Locked rotor torque	: 229 %	Approx. weight[3]	: 114 kg
Breakdown torque	: 250 %	Painting plan	: 203A (ISO 12944 - C3)
Insulation class	: F	Color	: RAL 5009
Service factor	: 1.25	Design	: B
Moment of inertia (J)	: 0.1104 kgm²		

Output	25%	50%	75%	100%
Efficiency (%)	0.000	91.0	91.7	92.4
Power Factor	0.00	0.68	0.78	0.83

Foundation loads

Max. traction : 166 kgf

Max. compression : 317 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.1	7.0	6.5	3.9	2.8	1.8	1.3

		Drive end	Non drive end
Bearing type	:	6309 C3	6209 C3
Sealing	:	V'Ring	Lip Seal
Lubrication interval	:	20000 h	20000 h
Lubricant amount	:	13 g	9 g
Lubricant type	:	Mobil Polyrex EM	

Notes
USABLE @208V 39.8A SF 1.15 SFA 45.8A

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight subject to changes after manufacturing process.
(4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	07/10/2026		1 / 3	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

DATA SHEET

Three Phase Induction Motor - Squirrel Cage

Customer :

Brake information

Voltage: 440-480 V
Brake Torque: 15.3 kgfm

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	07/10/2026		2 / 3	

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase

Product code : 13924889

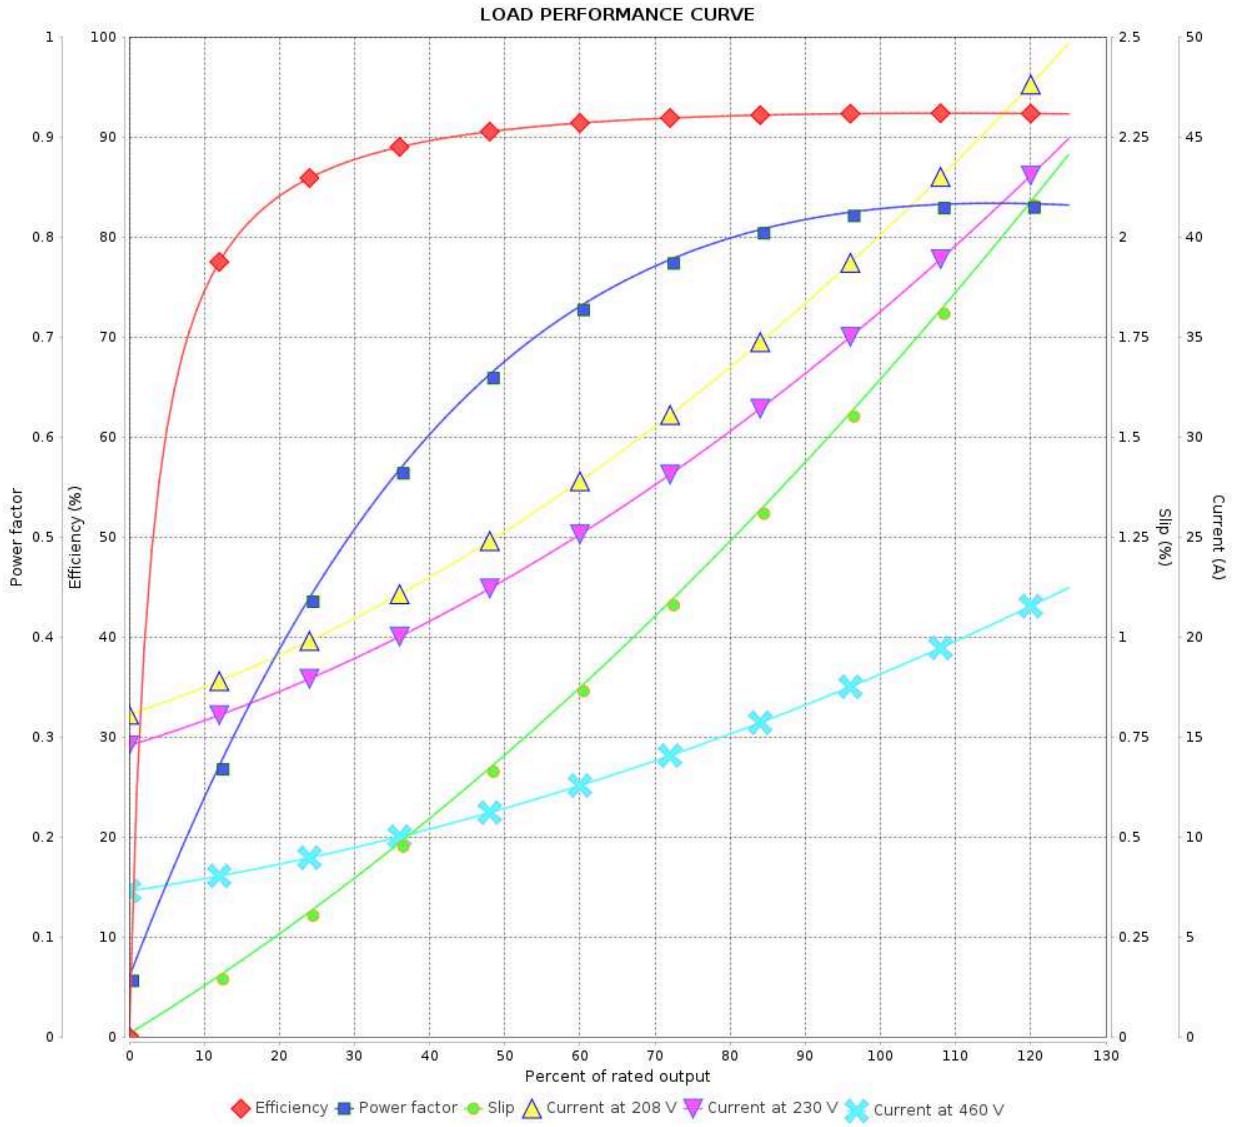



Performance	: 230/460 V 60 Hz 4P		
Rated current	: 36.0/18.0 A	Moment of inertia (J)	: 0.1104 kgm²
LRC	: 6.4	Duty cycle	: Cont.(S1)
Rated torque	: 6 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.25
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 1770 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date

Performed by				
Checked by			Page	Revision
Date	07/10/2026		3 / 3	


This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.
Subject to change without notice

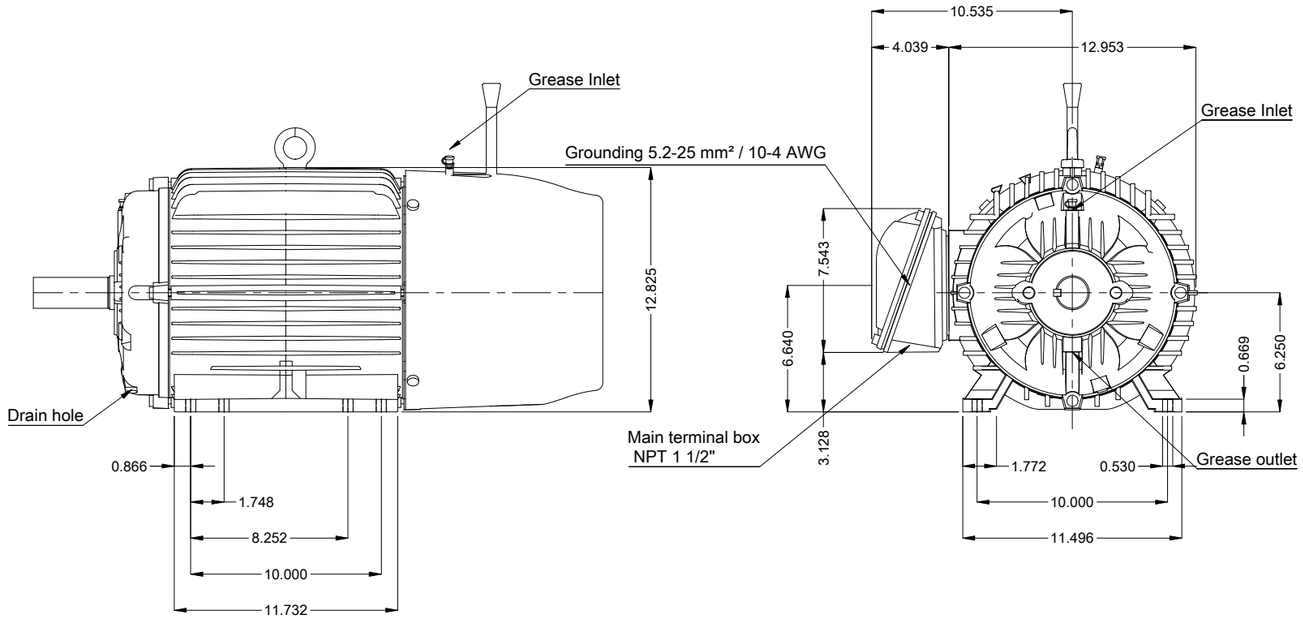

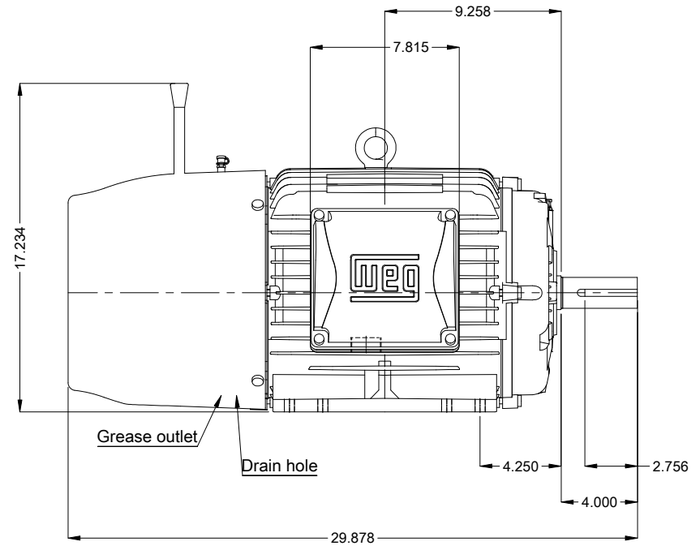

Without vertical jackscrews
Break size 18 (150 Nm)
Brake voltage 440-480 V
Color RAL 5009
Painting plan 203A
Mounting NEMA F-1
Mounting B3R(D)

DE Shaft End



15 HP 04 Poles 60 Hz | A

Scale 1 : 8

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

THREE PH. MOTOR W22 BRAKE MOTOR NEMA PREM. EFF.
FRAME 254/6T IP55 TEFC

PREVIEW

WDD | 00

SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.