

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :							
Product line		: W22 Brake Motor NEMA Premium Efficiency Three-Phase		Product code :		13924889	
Frame	: 254/6T	Locked rotor time	: 37s (cold) 21s (hot)	Output	: 15 HP (11 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)	Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 230/460 V	Altitude	: 1000 m.a.s.l.	Rated current	: 36.0/18.0 A	Protection degree	: IP55
L. R. Amperes	: 230/115 A	Cooling method	: IC411 - TEFC	LRC	: 6.4x(Code G)	Mounting	: F-1
No load current	: 14.6/7.30 A	Rotation ¹	: Both (CW and CCW)	Rated speed	: 1770 rpm	Noise level ²	: 64.0 dB(A)
Rated torque	: 6.15 kgfm	Starting method	: Direct On Line	Slip	: 1.67 %	Approx. weight ³	: 150 kg
Locked rotor torque	: 229 %			Breakdown torque	: 250 %		
Insulation class	: F			Service factor	: 1.25		
Moment of inertia (J)	: 0.1104 kgm ²			Design	: B		
Output	25%	50%	75%	100%	Foundation loads		
Efficiency (%)	0.000	91.0	91.7	92.4	Max. traction	: 166 kgf	
Power Factor	0.00	0.68	0.78	0.83	Max. compression	: 317 kgf	
Losses at normative operating points (speed;torque), in percentage of rated output power							
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)	
8.1	7.0	6.5	3.9	2.8	1.8	1.3	
		<u>Drive end</u>		<u>Non drive end</u>			
Bearing type	:	6309 C3		6209 C3			
Sealing	:	V'Ring		Lip Seal			
Lubrication interval	:	20000 h		20000 h			
Lubricant amount	:	13 g		9 g			
Lubricant type	:	Mobil Polyrex EM					
Notes							
USABLE @208V 39.8A SF 1.15 SFA 45.8A							
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary			Performed	Checked	Date	
Performed by							
Checked by					Page	Revision	
Date	02/01/2025				1 / 3		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Brake information

Voltage: 440-480 V
Brake Torque: 15.3 kgfm

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	02/01/2025		2 / 3	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 13924889

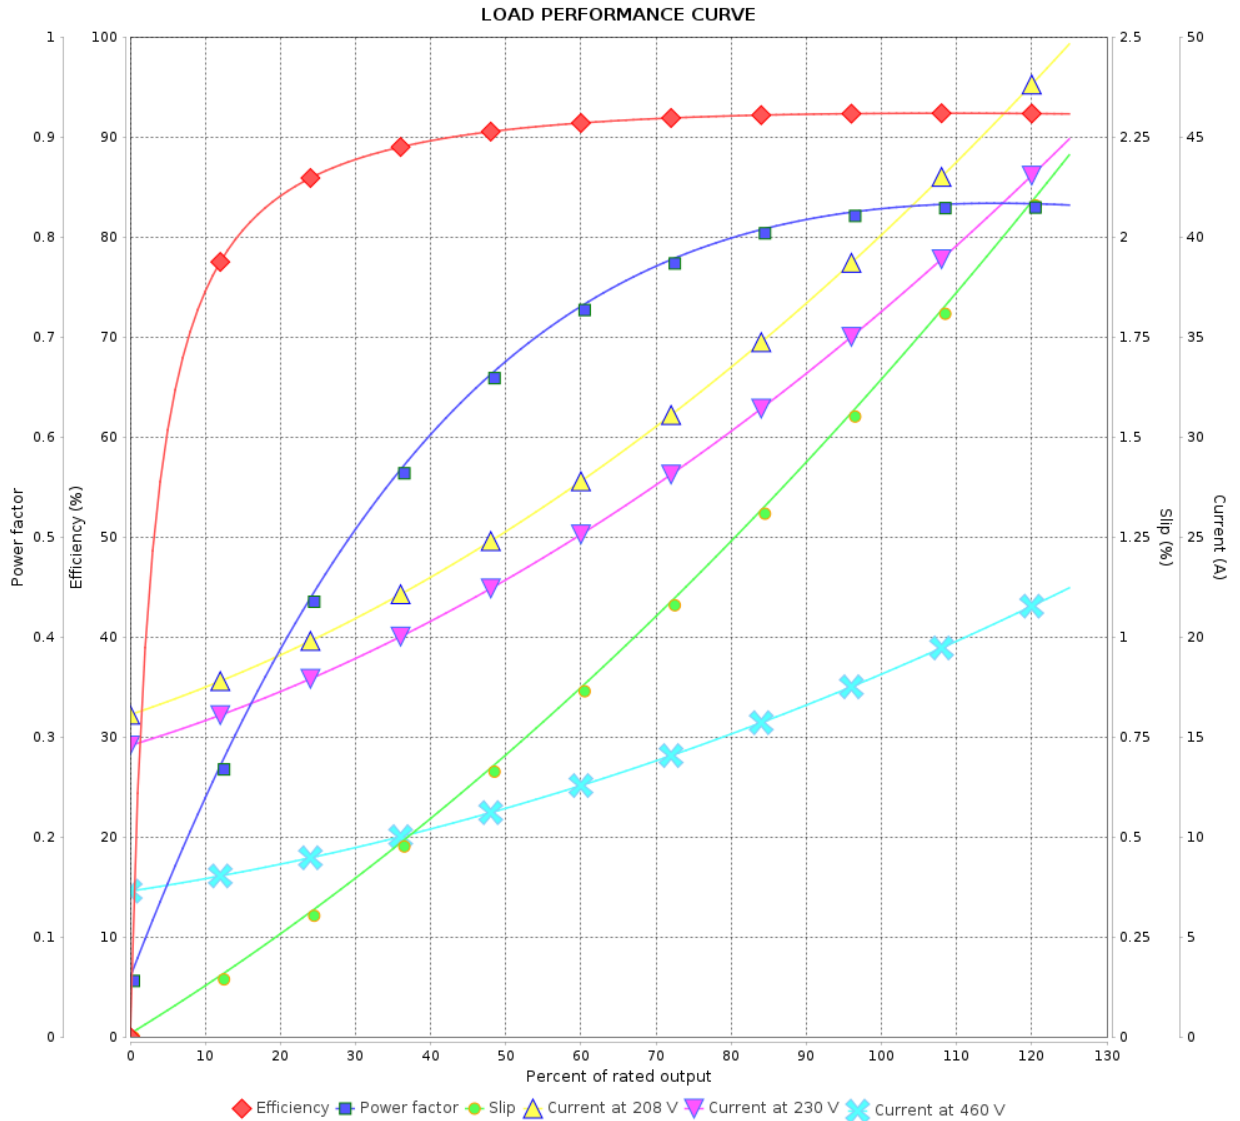

Performance : 230/460 V 60 Hz 4P

Rated current : 36.0/18.0 A
 LRC : 6.4
 Rated torque : 6.15 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 250 %
 Rated speed : 1770 rpm

Moment of inertia (J) : 0.1104 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
			Page	Revision
			3 / 3	

