

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 12744548

Frame	: 182/4TC	Locked rotor time	: 28s (cold) 16s (hot)
Output	: 1.5 HP (1.1 kW)	Temperature rise	: 80 K
Frequency	: 60 Hz	Duty cycle	: Cont.(S1)
Rated voltage	: 575 V	Ambient temperature	: -20°C to +40°C
Poles	: 6	Altitude	: 1000 m.a.s.l.
Rated current	: 2.03 A	Protection degree	: IP55
	: 7.8x(Code M)	Cooling method	: IC411 - TEFC
Rated speed	: 1170 rpm	Mounting	: F-1
Rated torque	: 0.930 kgfm	Rotation ¹	: Both (CW and CCW)
Insulation class	: F	Noise level ²	: 52.0 dB(A)
Service factor	: 1.25	Starting method	: Direct On Line
Moment of inertia (J)	: 0.0206 kgm ²	Approx. weight ³	: 43.6 kg
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	84.0	86.5	87.5	Max. traction	: 56 kgf
Power Factor	0.45	0.54	0.62	Max. compression	: 99 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
13.4	10.3	9.3	8.8	5.8	4.8	3.5

	Drive end	Non drive end
Bearing type	: 6207 ZZ	6206 ZZ
Sealing	: V'Ring	V'Ring
Lubrication interval	: -	-
Lubricant amount	: -	-
Lubricant type	: 00088	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	18/03/2026			


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :


Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 12744548

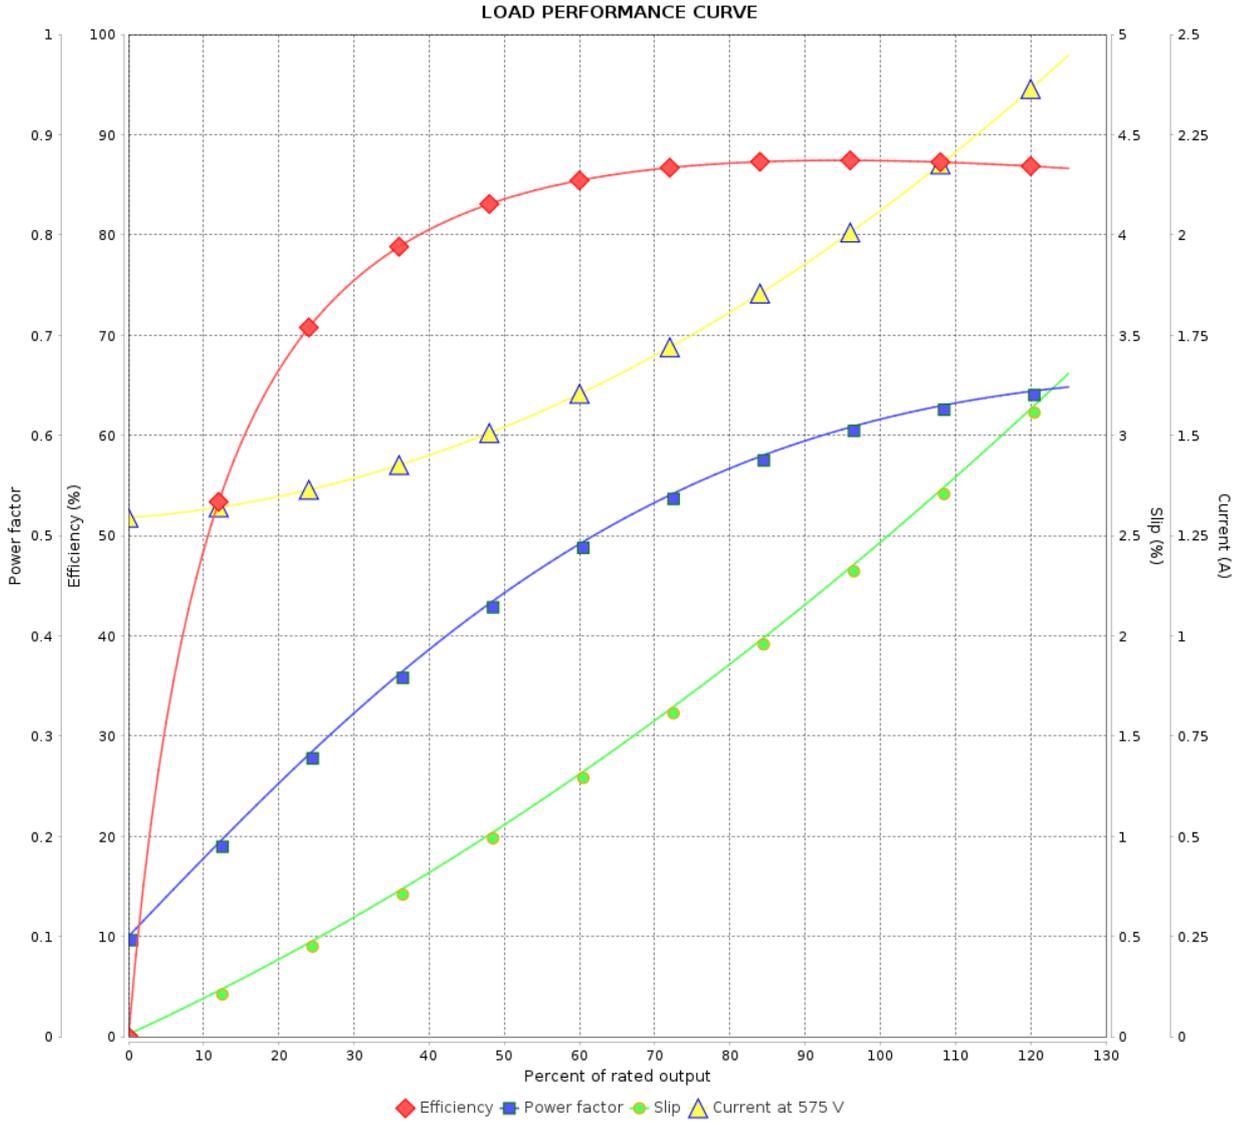

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		2 / 2		
Date		18/03/2026		

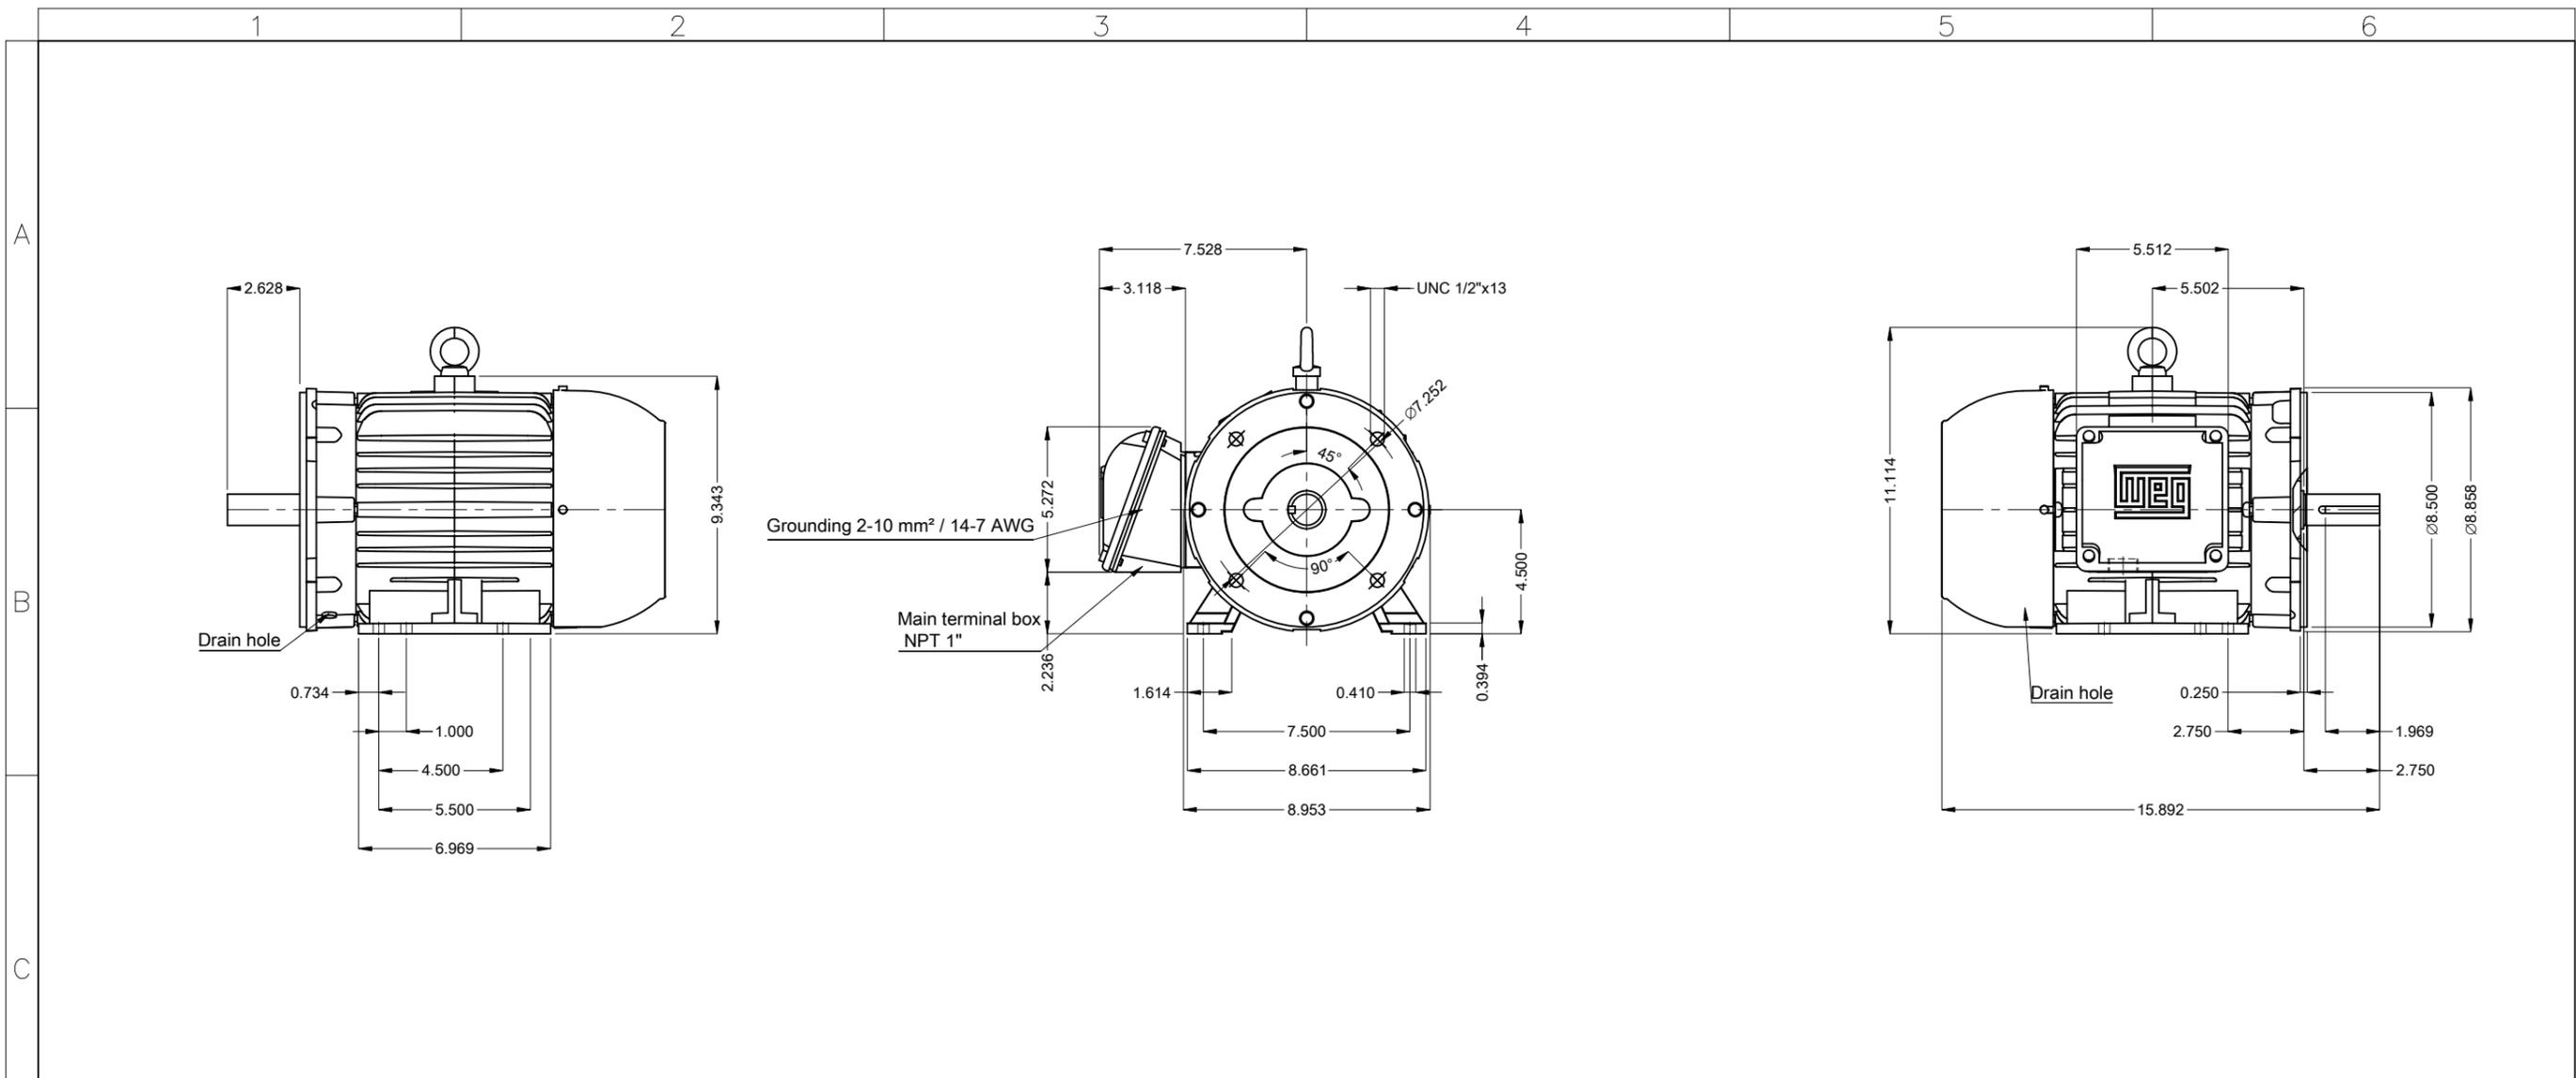

Color RAL 5009
 Painting plan 207A
 Mounting NEMA F-1
 Mounting B34D

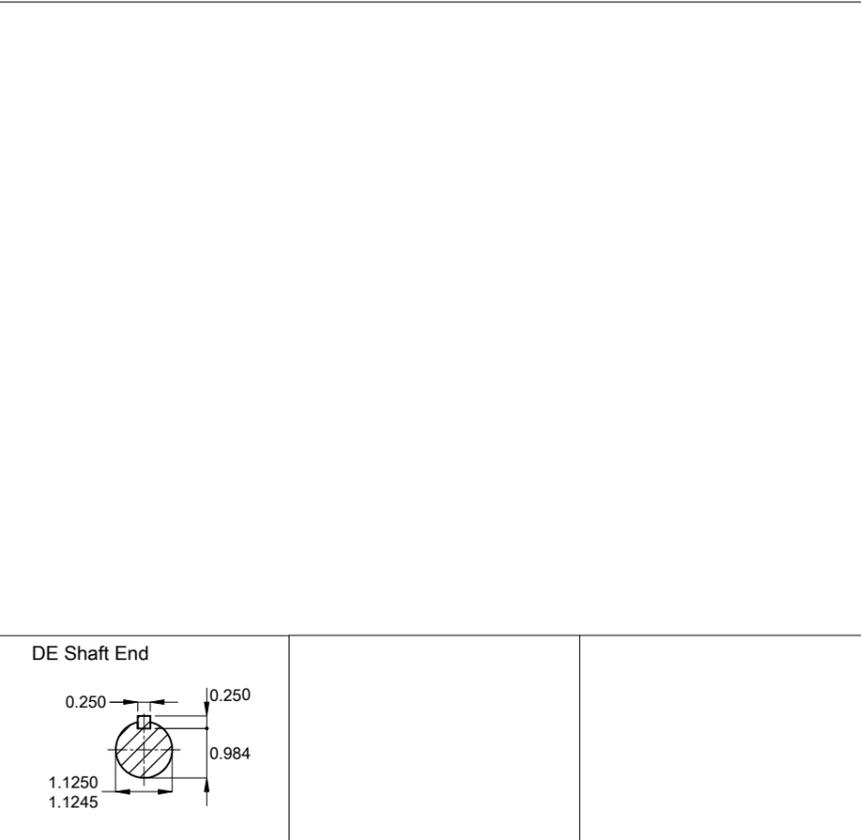

1.5 HP 06 Poles 60 Hz										A	
Scale 1 : 6											
HYBRISUSER										00	
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 NEMA PREM. EFF.					PREVIEW		WDD 00		
CHECKED		FRAME 182/4TC IP55 TEFC					SHEET 1 / 1				
RELEASED											
REL. DATE											