

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Wjet Pump Single-Phase Start Capacitor Product code : 10477965

Frame	: E56J	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 1 HP (0.75 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 115/208-230 V	Altitude	: 1000 m.a.s.l.
Rated current	: 12.1/6.00-6.05 A	Protection degree	: IP21
L. R. Amperes	: 70.2/34.8-35.1 A	Cooling method	: IC01 - ODP
LRC	: 5.8x(Code K)	Mounting	: F-1
No load current	: 7.90/3.41-3.95 A	Rotation ¹	: CCW
Rated speed	: 3495 rpm	Vibration	: Not Applicable
Slip	: 2.92 %	Starting method	: Direct On Line
Rated torque	: 0 kgfm	Approx. weight ³	: 14.1 kg
Locked rotor torque	: 200 %		: 207N (ISO 12944 - C2)
Breakdown torque	: 260 %		: Munsell N 1 - Matte
Insulation class	: B		
Service factor	: 1.40		
Moment of inertia (J)	: 0.0128 kgm ²		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	60.5	66.2	69.0	Max. traction	: 11 kgf
Power Factor	0.58	0.60	0.77	Max. compression	: 23 kgf

		Drive end	Non drive end
Bearing type	:	6203 2RS	6203 2RS
Sealing	:	Slinger	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision 1 / 2		
Checked by				
Date	24/09/2026			

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Wjet Pump Single-Phase Start Capacitor

Product code : 10477965


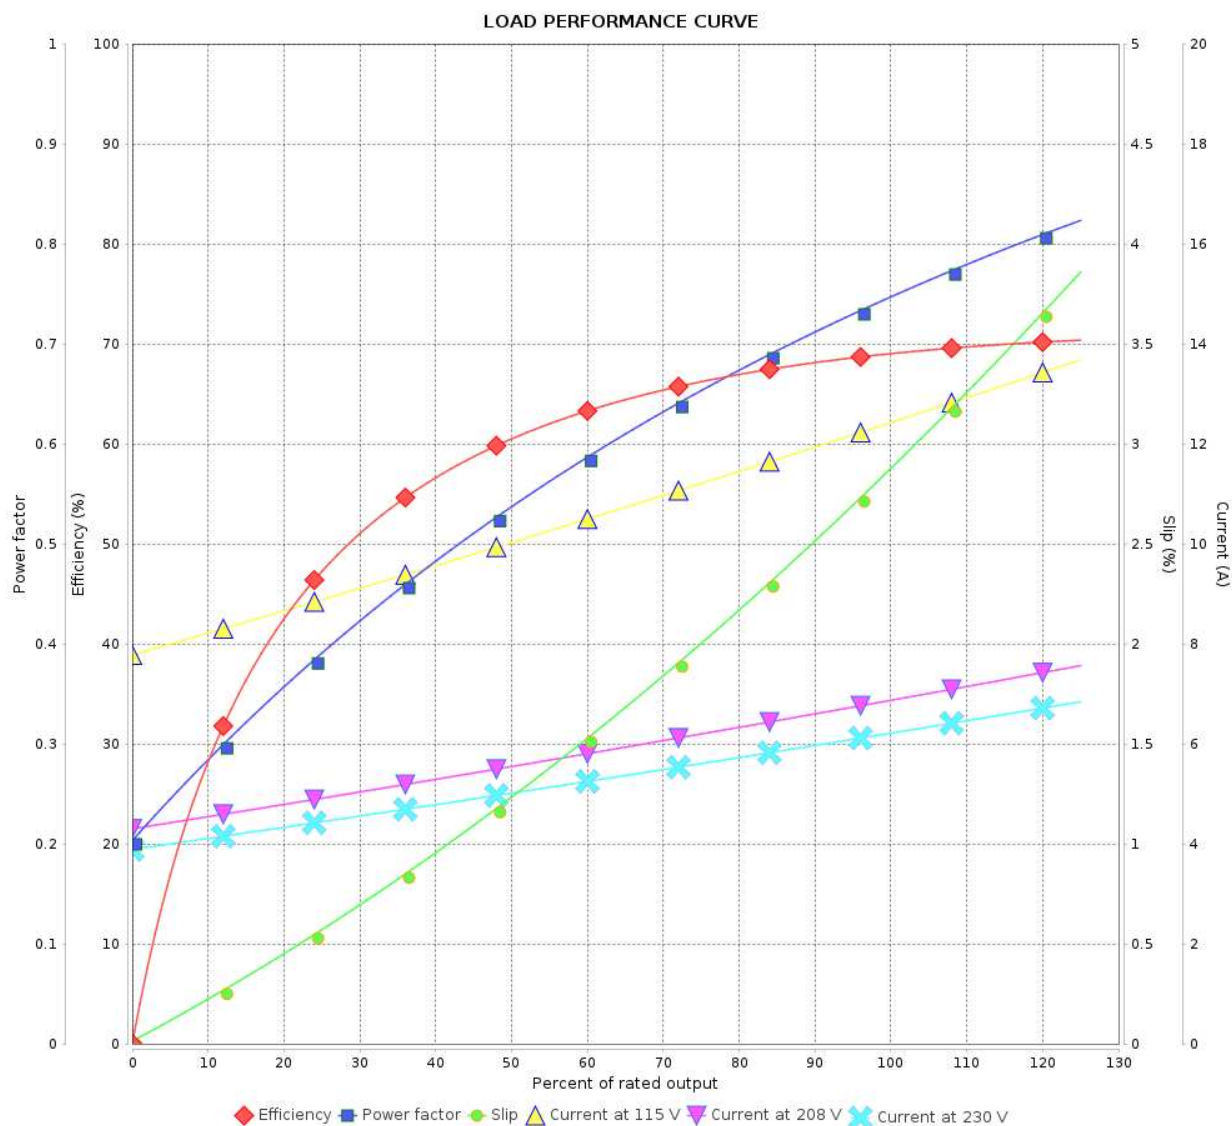


Performance : 115/208-230 V 60 Hz 2P

Rated current : 12.1/6.00-6.05 A
LRC : 5.8
Rated torque : 0 kgfm
Locked rotor torque : 200 %
Breakdown torque : 260 %
Rated speed : 3495 rpm

Moment of inertia (J) : 0.0128 kgm²
Duty cycle : Cont.(S1)
Insulation class : B
Service factor :
Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 2 / 2Revision		
Checked by				
Date	24/09/2026			

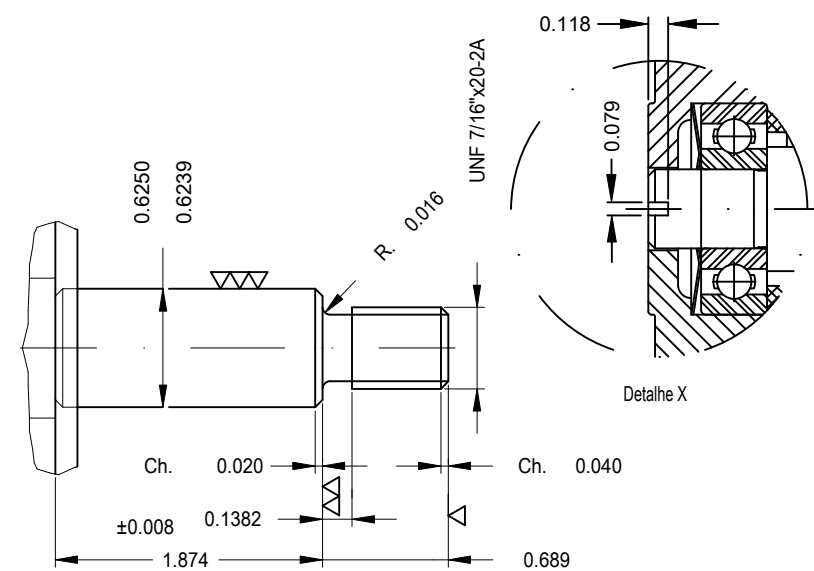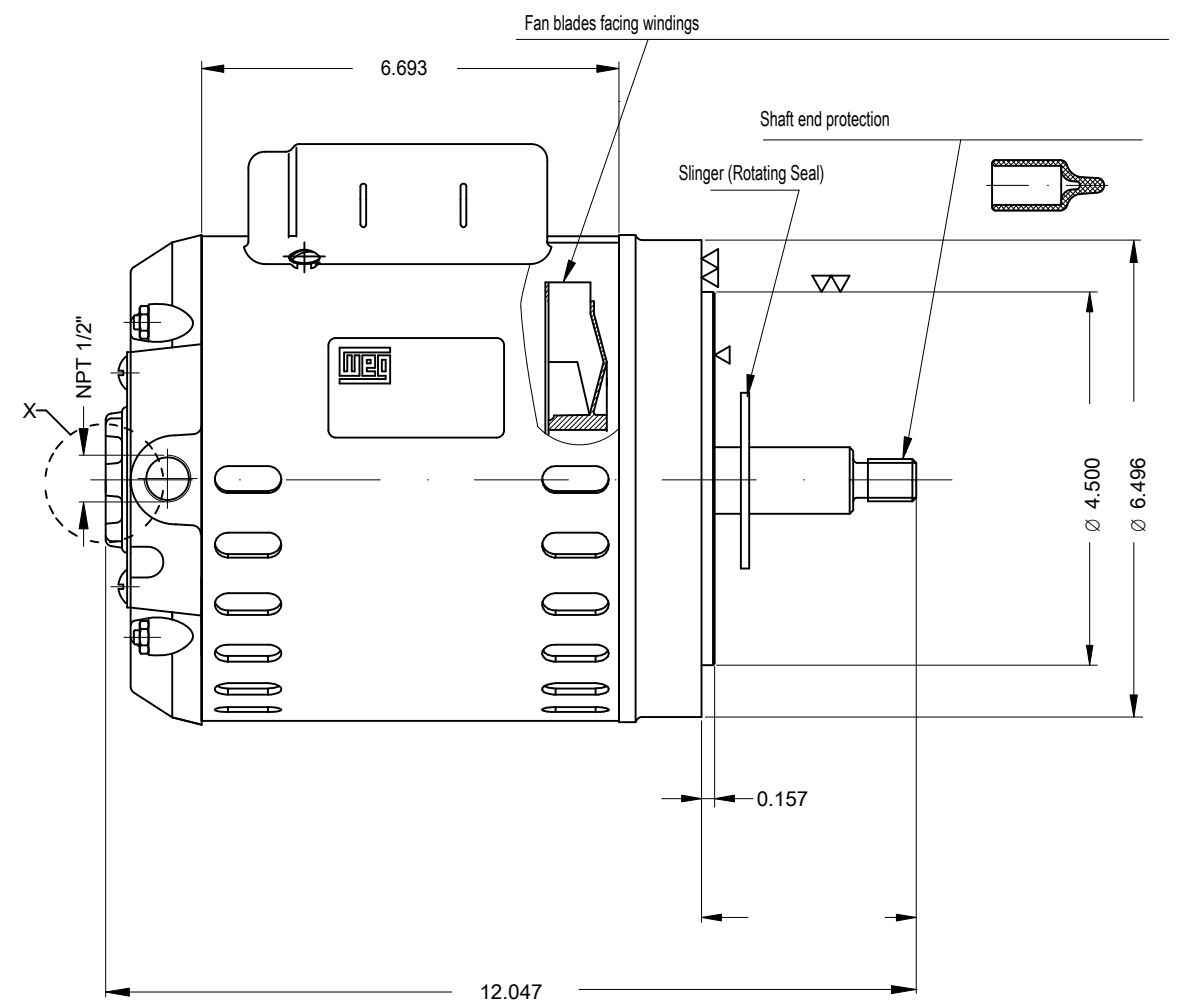

Shaft material - stainless steel AISI 304									
Mounting B14R(D)									
				HYBRISUSER					00
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		SINGLE PH. MOTOR WJET PUMP FRAME E56J IP21 ODP			PREVIEW WDD 00			
CHECKED									
RELEASED									
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1			

WEG's property. Forbidden reproduction without previous authorization.

Dimensions in inches

XME A3