

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line		: Close Coupled Pump NEMA Premium Efficiency Three-Phase		Product code : 12032545	
Frame	: 324JP	Locked rotor time	: 50s (cold) 28s (hot)		
Output	: 40 HP (30 kW)	Temperature rise	: 80 K		
Poles	: 4	Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C		
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.		
Rated current	: 38.6 A	Protection degree	: IP23		
L. R. Amperes	: 239 A	Cooling method	: IC01 - ODP		
LRC	: 6.2x(Code G)	Mounting	: W-6		
No load current	: 14.8 A	Rotation ¹	: Both (CW and CCW)		
Rated speed	: 1775 rpm	Noise level ²	: 64.0 dB(A)		
Slip	: 1.39 %	Starting method	: Direct On Line		
Rated torque	: 16.4 kgfm	Approx. weight ³	: 219 kg		
Locked rotor torque	: 220 %				
Breakdown torque	: 229 %				
Insulation class	: F				
Service factor	: 1.15				
Moment of inertia (J)	: 0.2551 kgm ²				
Design	: B				
Output	50%	75%	100%	Foundation loads	
Efficiency (%)	93.6	94.1	94.1	Max. traction : 364 kgf	
Power Factor	0.68	0.78	0.83	Max. compression : 583 kgf	
		<u>Drive end</u>	<u>Non drive end</u>		
Bearing type	:	6312 Z C3	6212 Z C3		
Sealing	:	Without Bearing Seal	Without Bearing Seal		
Lubrication interval	:	20000 h	20000 h		
Lubricant amount	:	21 g	13 g		
Lubricant type	:	Mobil Polyrex EM			
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	24/10/2024			1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : Close Coupled Pump NEMA
Premium Efficiency Three-Phase

Product code : 12032545

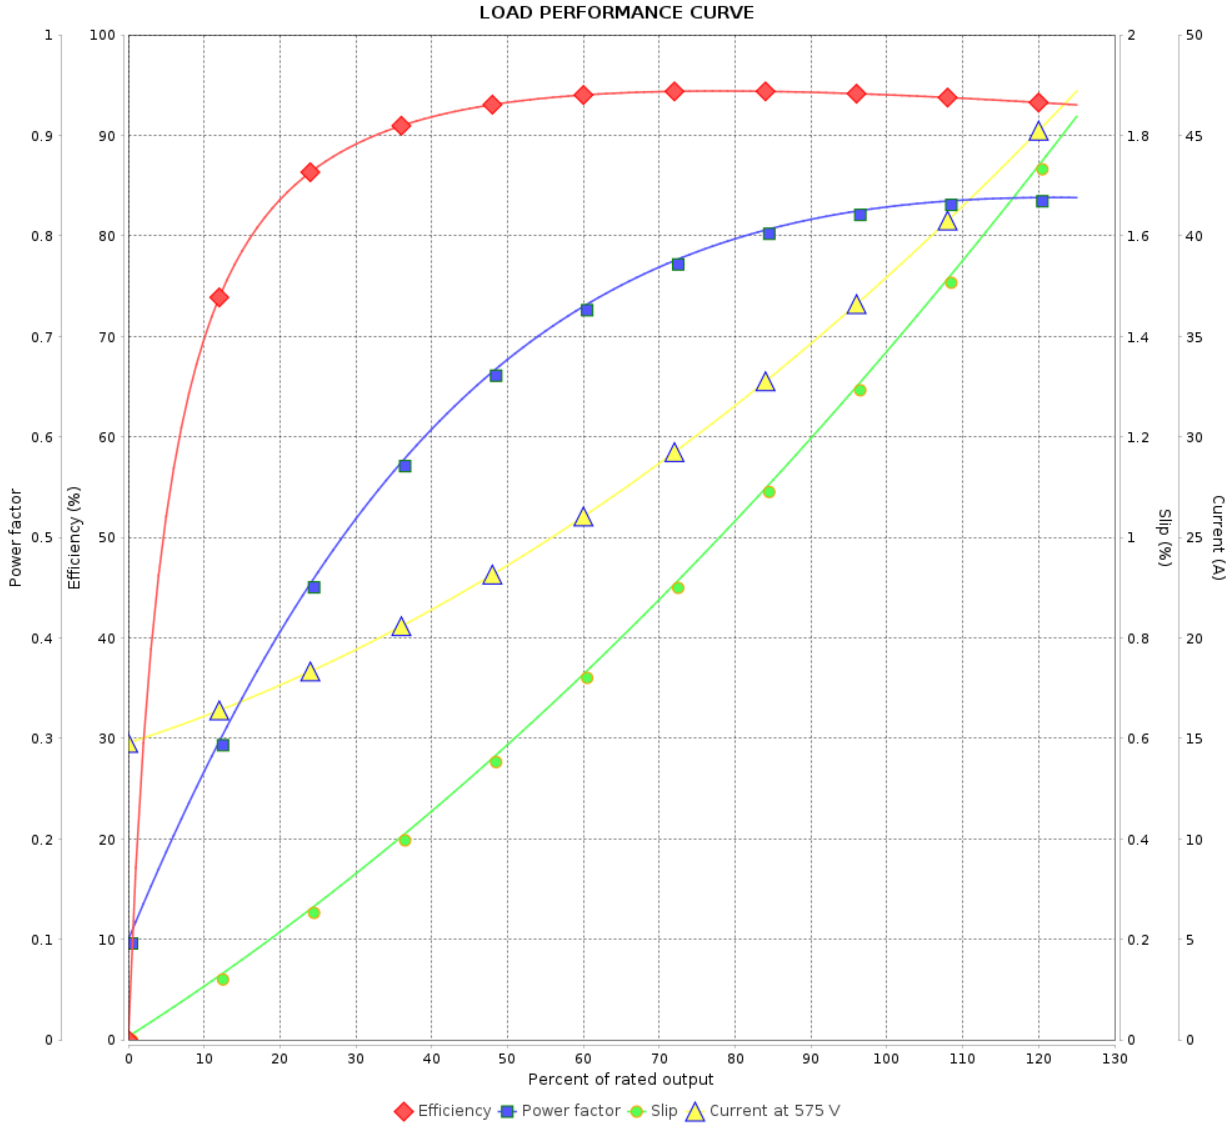

Performance : 575 V 60 Hz 4P

Rated current : 38.6 A
 LRC : 6.2
 Rated torque : 16.4 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 229 %
 Rated speed : 1775 rpm

Moment of inertia (J) : 0.2551 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

