

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Jet Pump - C type Three-Phase	Product code : 13722359	
Frame : 56C Insulation class : F Duty cycle : Cont.(S1) Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP55 Design : B		Cooling method : IC411 - TEFC Mounting : W-6 Rotation ¹ : CCW Starting method : Direct On Line Approx. weight ³ : 17.6 kg Moment of inertia (J) : 0.0054 kgm ²		
Output [HP]		2		
Poles		2		
Frequency [Hz]		60		
Rated voltage [V]		575		
Rated current [A]		1.98		
L. R. Amperes [A]		19.6		
LRC [A]		9.9x(Code L)		
No load current [A]		0.850		
Rated speed [RPM]		3520		
Slip [%]		2.22		
Rated torque [kgfm]		0.412		
Locked rotor torque [%]		250		
Breakdown torque [%]		300		
Service factor		1.15		
Temperature rise		80 K		
Locked rotor time		23s (cold) 13s (hot)		
Noise level ²		68.0 dB(A)		
Efficiency (%)	25%			
	50%	82.5		
	75%	85.5		
	100%	85.5		
Power Factor	25%			
	50%	0.73		
	75%	0.83		
	100%	0.89		
Bearing type : Drive end 6203 2RS Non drive end 6202 2RS Sealing : V'Ring V'Ring Lubrication interval : - - Lubricant amount : - - Lubricant type : Mobil Polyrex EM		Foundation loads Max. traction : 31 kgf Max. compression : 48 kgf		
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by			Page	Revision
Date	17/05/2022		1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase

Product code : 13722359

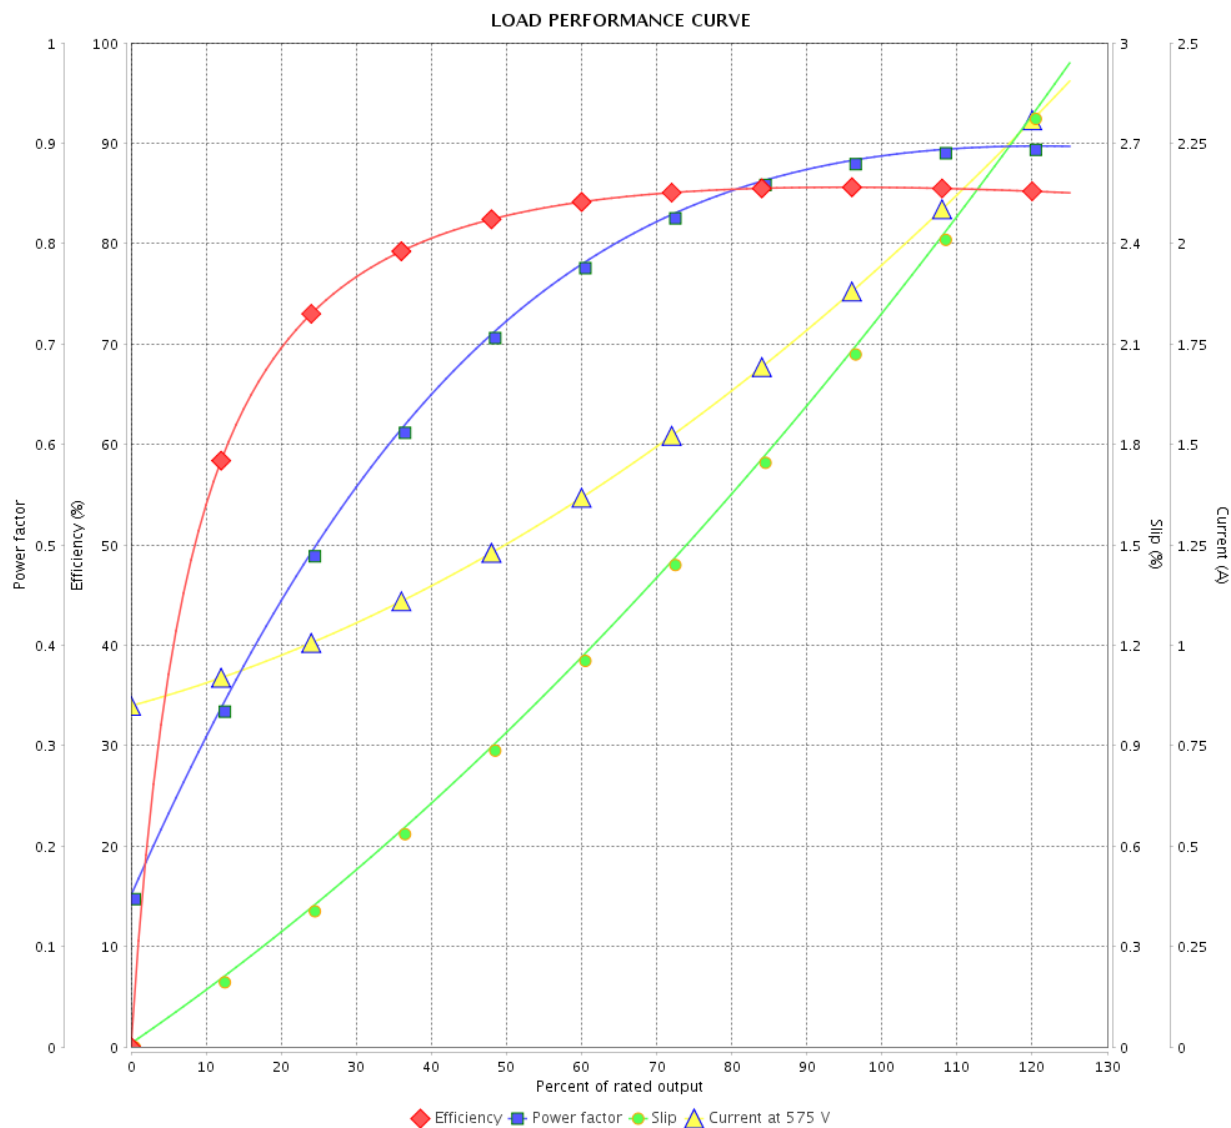

Performance : 575 V 60 Hz 2P

Rated current : 1.98 A
 LRC : 9.9
 Rated torque : 0.412 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 300 %
 Rated speed : 3520 rpm

Moment of inertia (J) : 0.0054 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					
	17/05/2022				

