

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase Product code : 13722363

Frame	: 56C	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: W-6
Duty cycle	: Cont.(S1)	Rotation ¹	: CCW
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 21.7 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0070 kgm ²
Design	: B		

Output [HP]	3	3	3
Poles	2	2	2
Frequency [Hz]	60	50	50
Rated voltage [V]	230/460	190/380	220/415
Rated current [A]	7.02/3.51	8.50/4.25	7.38/3.91
L. R. Amperes [A]	66.7/33.3	62.9/31.5	65.6/34.8
LRC [A]	9.5x(Code L)	7.4x(Code J)	8.9x(Code K)
No load current [A]	2.56/1.28	2.52/1.26	2.72/1.44
Rated speed [RPM]	3500	2870	2895
Slip [%]	2.78	4.33	3.50
Rated torque [kgfm]	0.621	0.759	0.752
Locked rotor torque [%]	300	229	290
Breakdown torque [%]	380	280	340
Service factor		1.15	1.15
Temperature rise	80 K	80 K	80 K
Locked rotor time	18s (cold) 10s (hot)	16s (cold) 9s (hot)	14s (cold) 8s (hot)
Noise level ²	68.0 dB(A)	65.0 dB(A)	65.0 dB(A)
Efficiency (%)	25%		
	50%	84.0	86.2
	75%	86.5	87.0
	100%	86.5	86.0
Power Factor	25%		
	50%	0.78	0.78
	75%	0.87	0.87
	100%	0.91	0.91

	Drive end	Non drive end	Foundation loads
Bearing type	: 6203 2RS	6202 2RS	Max. traction : 71 kgf
Sealing	: V'Ring	V'Ring	Max. compression : 93 kgf
Lubrication interval	: -	-	
Lubricant amount	: -	-	
Lubricant type	: Mobil Polyrex EM		

Notes

USABLE @208V 7.76A SF 1.00 SFA 7.76A

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	17/05/2022			

Page 1 / 4
Revision

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase

Product code : 13722363

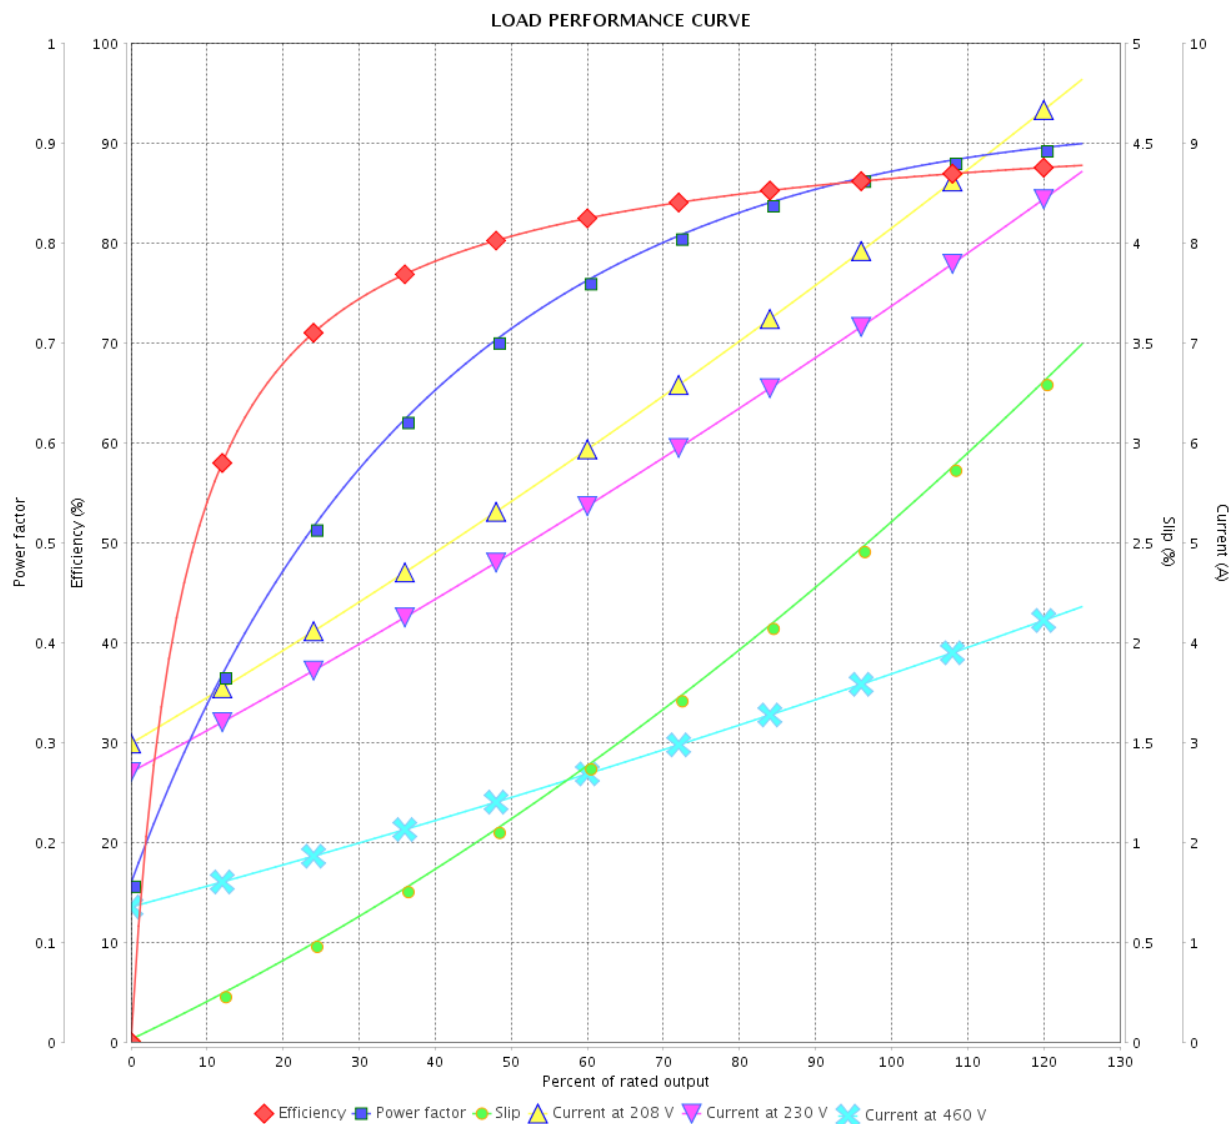

Performance : 230/460 V 60 Hz 2P

Rated current : 7.02/3.51 A
 LRC : 9.5
 Rated torque : 0.621 kgfm
 Locked rotor torque : 300 %
 Breakdown torque : 380 %
 Rated speed : 3500 rpm

Moment of inertia (J) : 0.0070 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 4	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase

Product code : 13722363

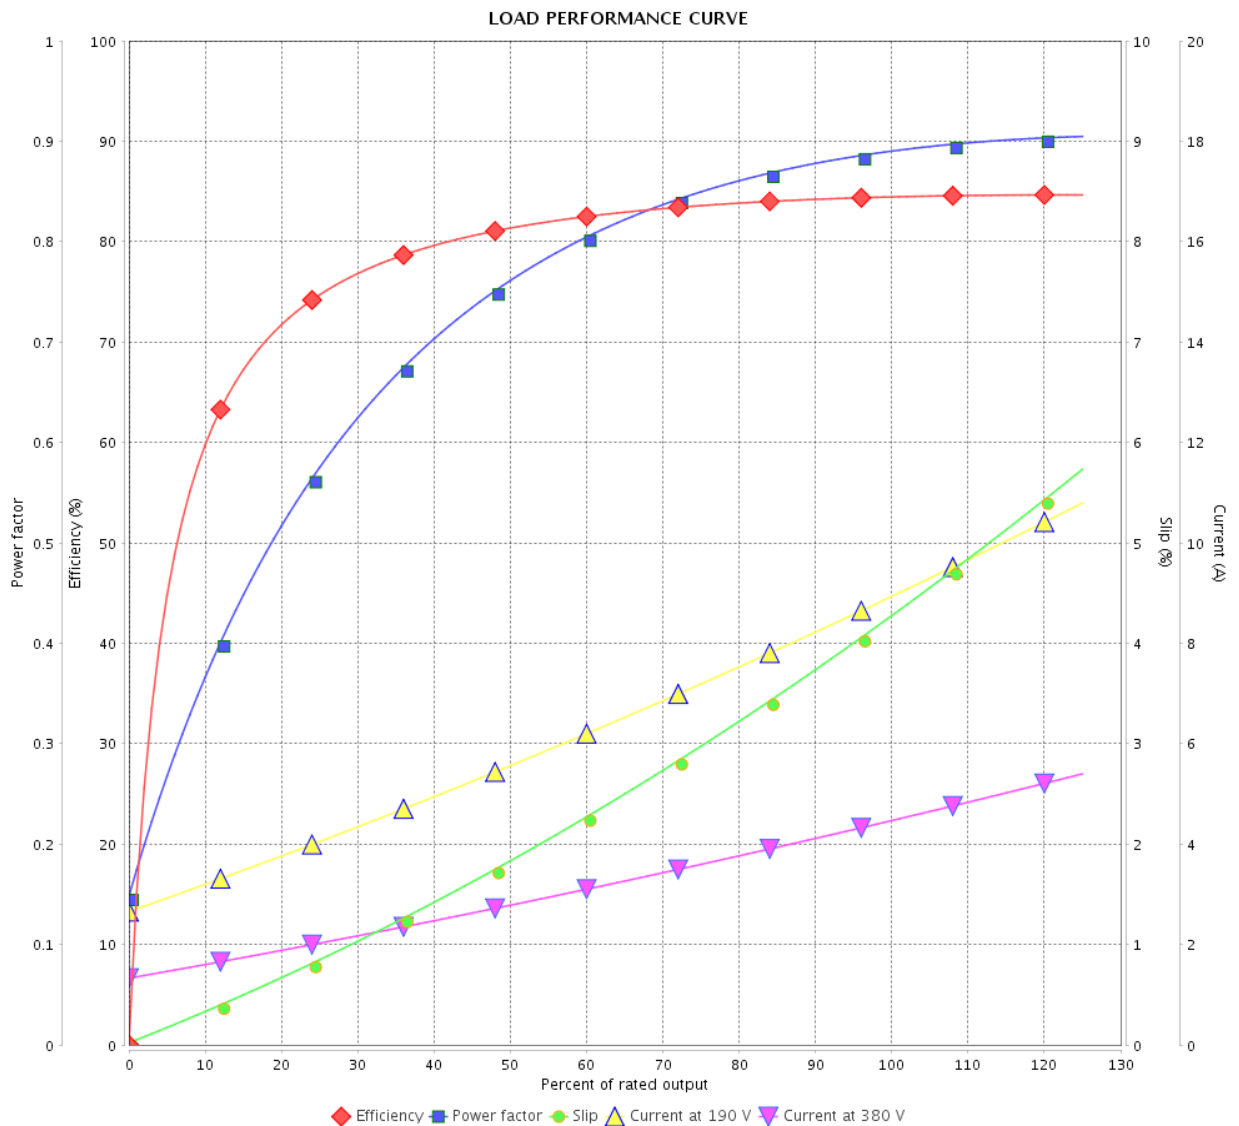

Performance : 190/380 V 50 Hz 2P

Rated current : 8.50/4.25 A
 LRC : 7.4
 Rated torque : 0.759 kgfm
 Locked rotor torque : 229 %
 Breakdown torque : 280 %
 Rated speed : 2870 rpm

Moment of inertia (J) : 0.0070 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 3 / 4	Revision
Checked by					
Date	17/05/2022				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase

Product code : 13722363

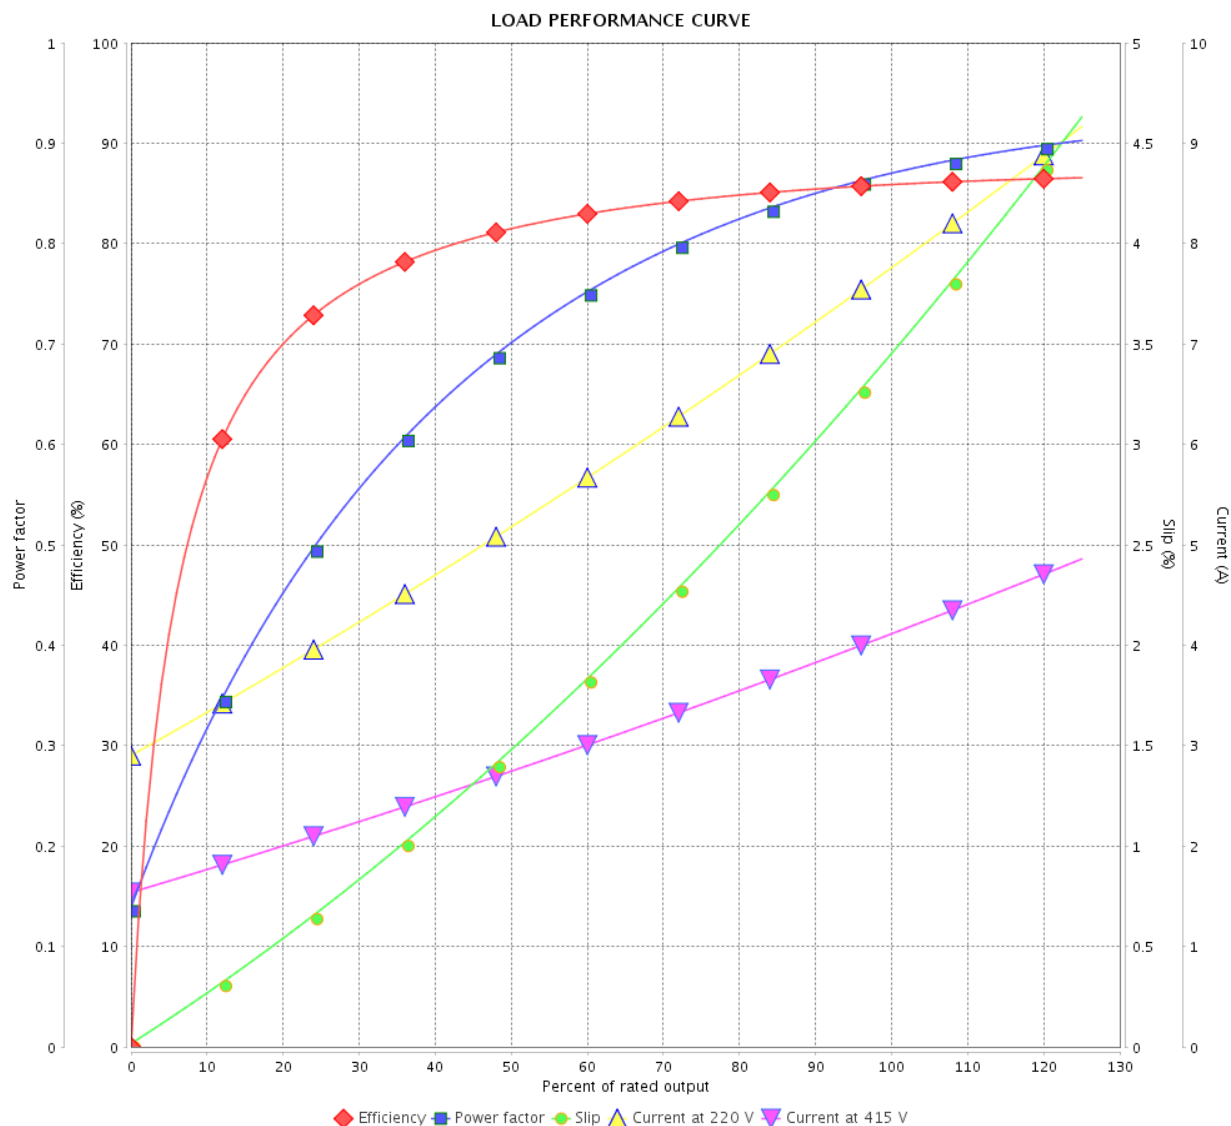

Performance : 220/415 V 50 Hz 2P

Rated current : 7.38/3.91 A
 LRC : 8.9
 Rated torque : 0.752 kgfm
 Locked rotor torque : 290 %
 Breakdown torque : 340 %
 Rated speed : 2895 rpm

Moment of inertia (J) : 0.0070 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 4 / 4	Revision
Checked by					
Date	17/05/2022				

