

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :					
Product line		: W22 Tru-Metric IE3 Three-Phase	Product code :	16572113	
Frame	: 200L	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: B35L(E)		
Duty cycle	: S1	Rotation <sup>1</sup>	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: VFD		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 258 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.3468 kgm <sup>2</sup>		
Design	: N				
Output [HP]	40	40	40		
Poles	4	4	4		
Frequency [Hz]	60	50	50		
Rated voltage [V]	208-230/460	380	415		
Rated current [A]	109-98.8/49.4	58.0	55.7		
L. R. Amperes [A]	1005-909/454	423	457		
LRC [A]	9.2	7.3	8.2		
No load current [A]	44.0-51.0/25.5	24.5	27.0		
Rated speed [RPM]	1785	1480	1485		
Slip [%]	0.83	1.33	1.00		
Rated torque [kgfm]	16.3	19.6	19.5		
Locked rotor torque [%]	340	250	310		
Breakdown torque [%]	350	280	310		
Service factor	1.25	1.25	1.25		
Temperature rise	80 K	80 K	80 K		
Locked rotor time	23s (cold) 13s (hot)	19s (cold) 11s (hot)	16s (cold) 9s (hot)		
Noise level <sup>2</sup>	66.0 dB(A)	63.0 dB(A)	63.0 dB(A)		
Efficiency (%)	25%	0.000	0.000	0.000	
	50%	92.6	93.4	92.8	
	75%	93.7	93.7	93.3	
	100%	94.1	93.6	93.6	
Power Factor	25%	0.00	0.00	0.00	
	50%	0.63	0.69	0.60	
	75%	0.75	0.79	0.72	
	100%	0.81	0.84	0.80	
Losses at normative operating points (speed;torque), in percentage of rated output power					
Losses (%)	P1 (0,9;1,0)	6.0	6.6	6.6	
	P2 (0,5;1,0)	4.7	5.1	5.1	
	P3 (0,25;1,0)	4.3	4.6	4.6	
	P4 (0,9;0,5)	3.5	3.9	3.9	
	P5 (0,5;0,5)	2.3	2.5	2.5	
	P6 (0,5;0,25)	1.8	1.9	1.9	
	P7 (0,25;0,25)	1.2	1.3	1.3	
Bearing type	: Drive end : 6312 C3	Non drive end : 6212 C3	Foundation loads		
Sealing	: V'Ring	V'Ring	Max. traction : 633 kgf		
Lubrication interval	: 20000 h	20000 h	Max. compression : 891 kgf		
Lubricant amount	: 21 g	13 g			
Lubricant type	: Mobil Polyrex EM				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	25/10/2024			1 / 5	

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Notes

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	25/10/2024		2 / 5	


# LOAD PERFORMANCE CURVE

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Tru-Metric IE3 Three-Phase Product code : 16572113

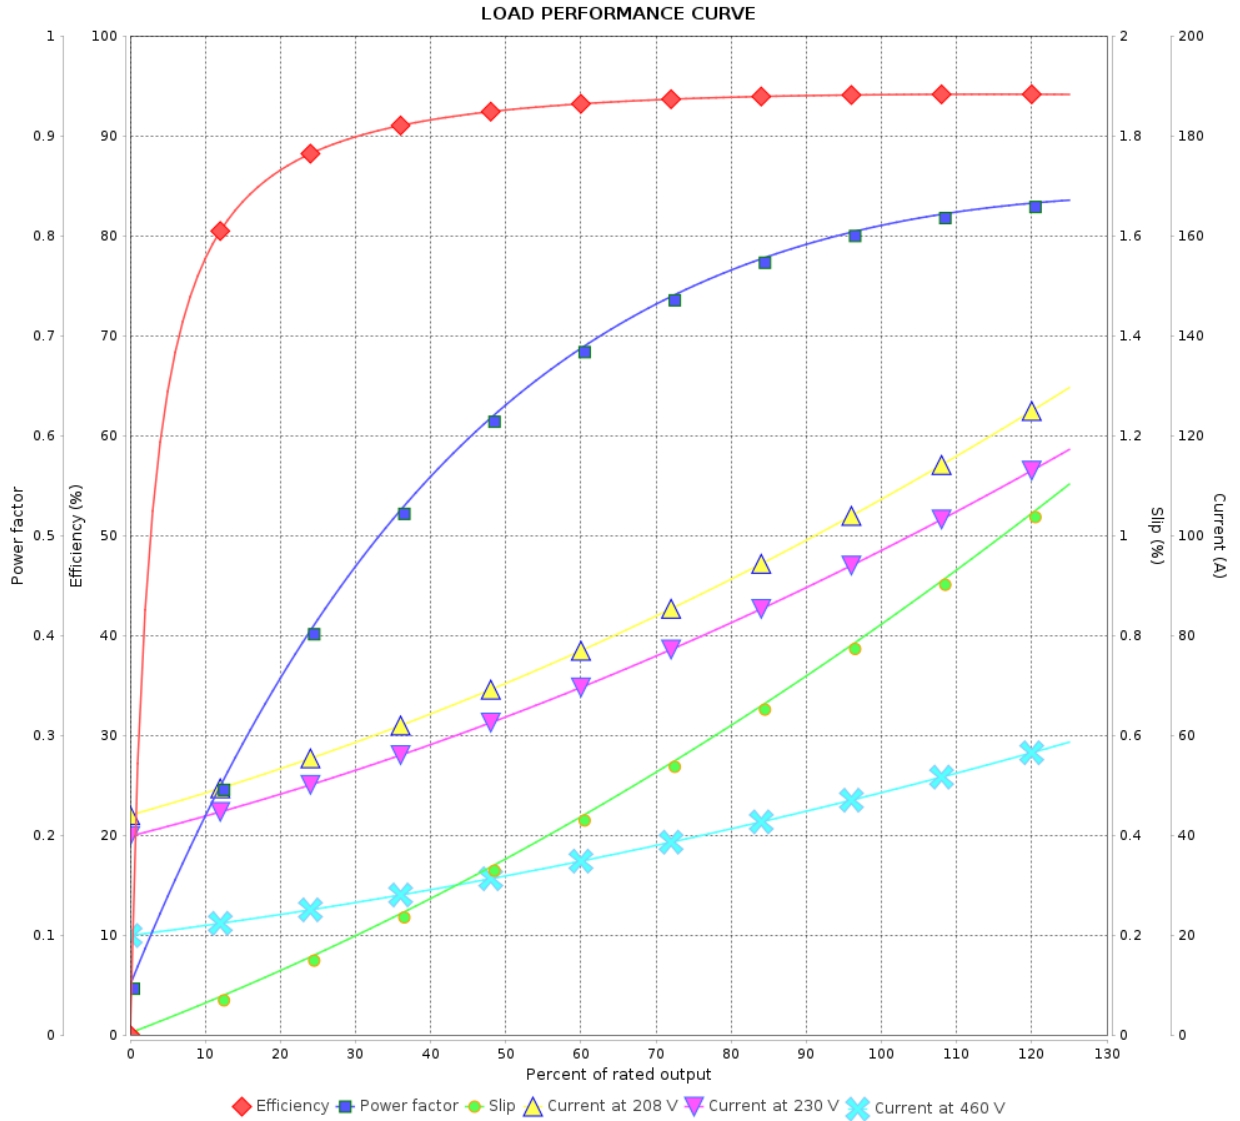

Performance : 208-230/460 V 60 Hz 4P

Rated current : 109-98.8/49.4 A  
 LRC : 9.2  
 Rated torque : 16.3 kgfm  
 Locked rotor torque : 340 %  
 Breakdown torque : 350 %  
 Rated speed : 1785 rpm

Moment of inertia (J) : 0.3468 kgm<sup>2</sup>  
 Duty cycle : S1  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Tru-Metric IE3 Three-Phase Product code : 16572113

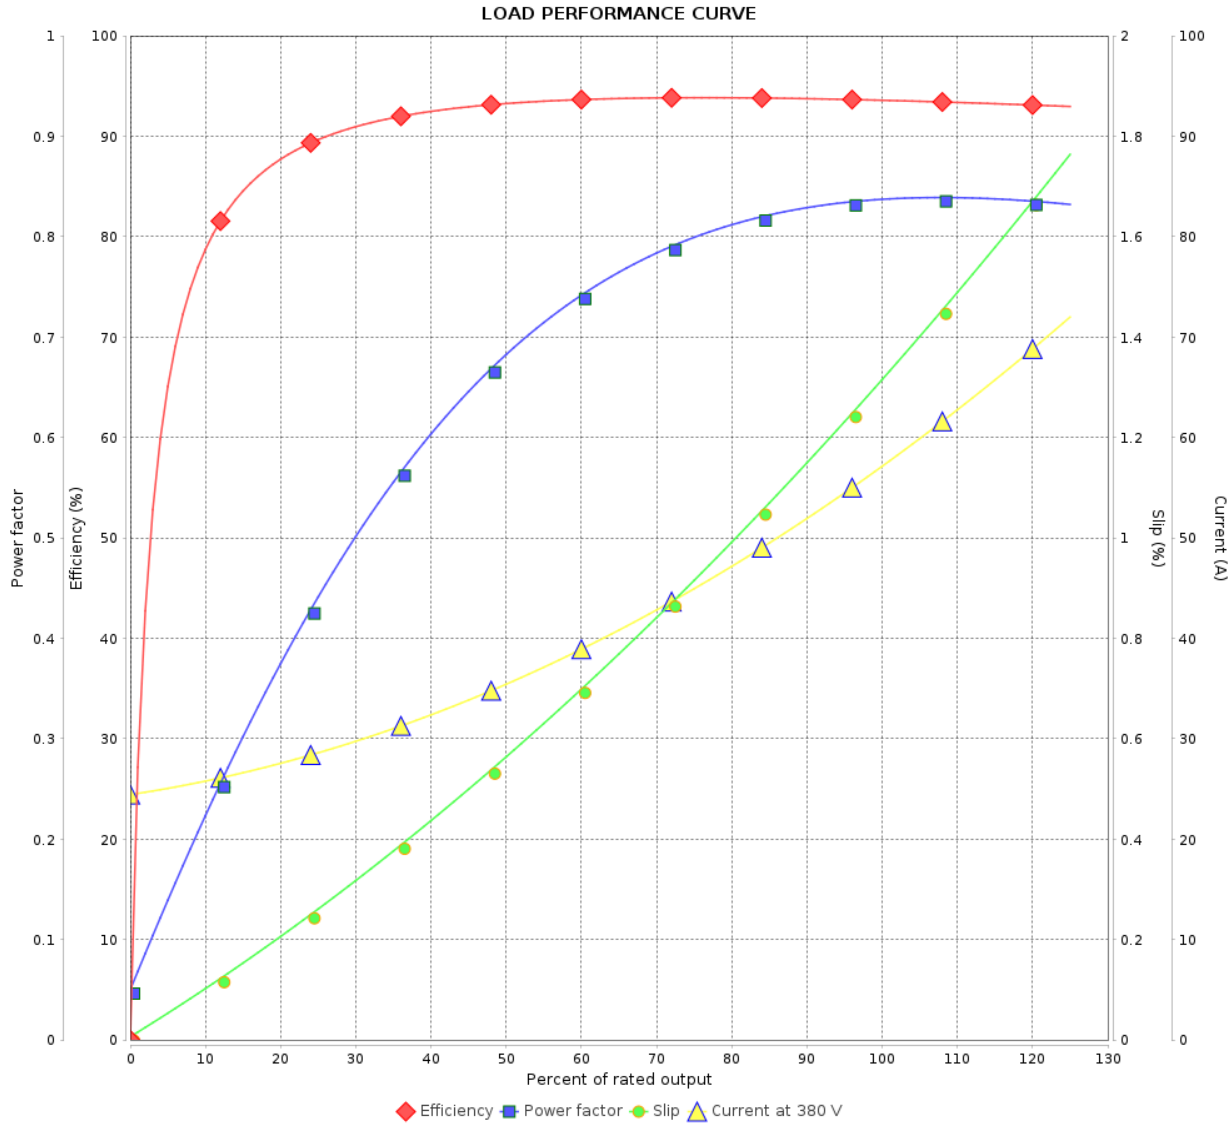

Performance : 380 V 50 Hz 4P

Rated current	: 58.0 A	Moment of inertia (J)	: 0.3468 kgm <sup>2</sup>
LRC	: 7.3	Duty cycle	: S1
Rated torque	: 19.6 kgfm	Insulation class	: F
Locked rotor torque	: 250 %	Service factor	: 1.25
Breakdown torque	: 280 %	Temperature rise	: 80 K
Rated speed	: 1480 rpm	Design	: N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 5	Revision
Checked by				
Date	25/10/2024			


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 Tru-Metric IE3 Three-Phase Product code : 16572113

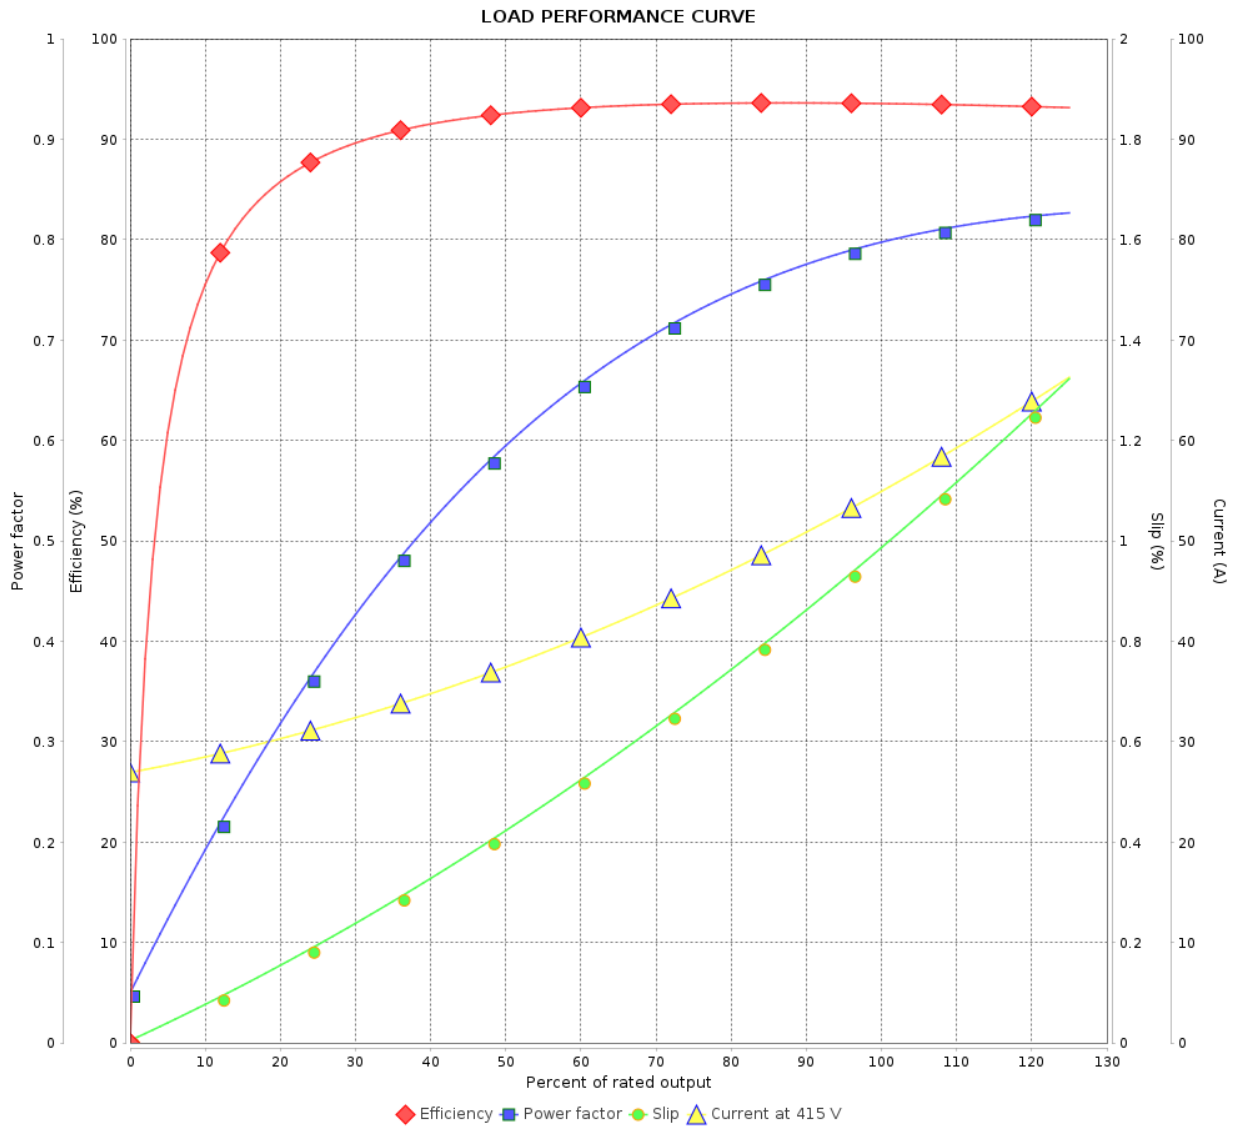


Performance : 415 V 50 Hz 4P

Rated current : 55.7 A  
 LRC : 8.2  
 Rated torque : 19.5 kgfm  
 Locked rotor torque : 310 %  
 Breakdown torque : 310 %  
 Rated speed : 1485 rpm

Moment of inertia (J) : 0.3468 kgm<sup>2</sup>  
 Duty cycle : S1  
 Insulation class : F  
 Service factor : 1.25  
 Temperature rise : 80 K  
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

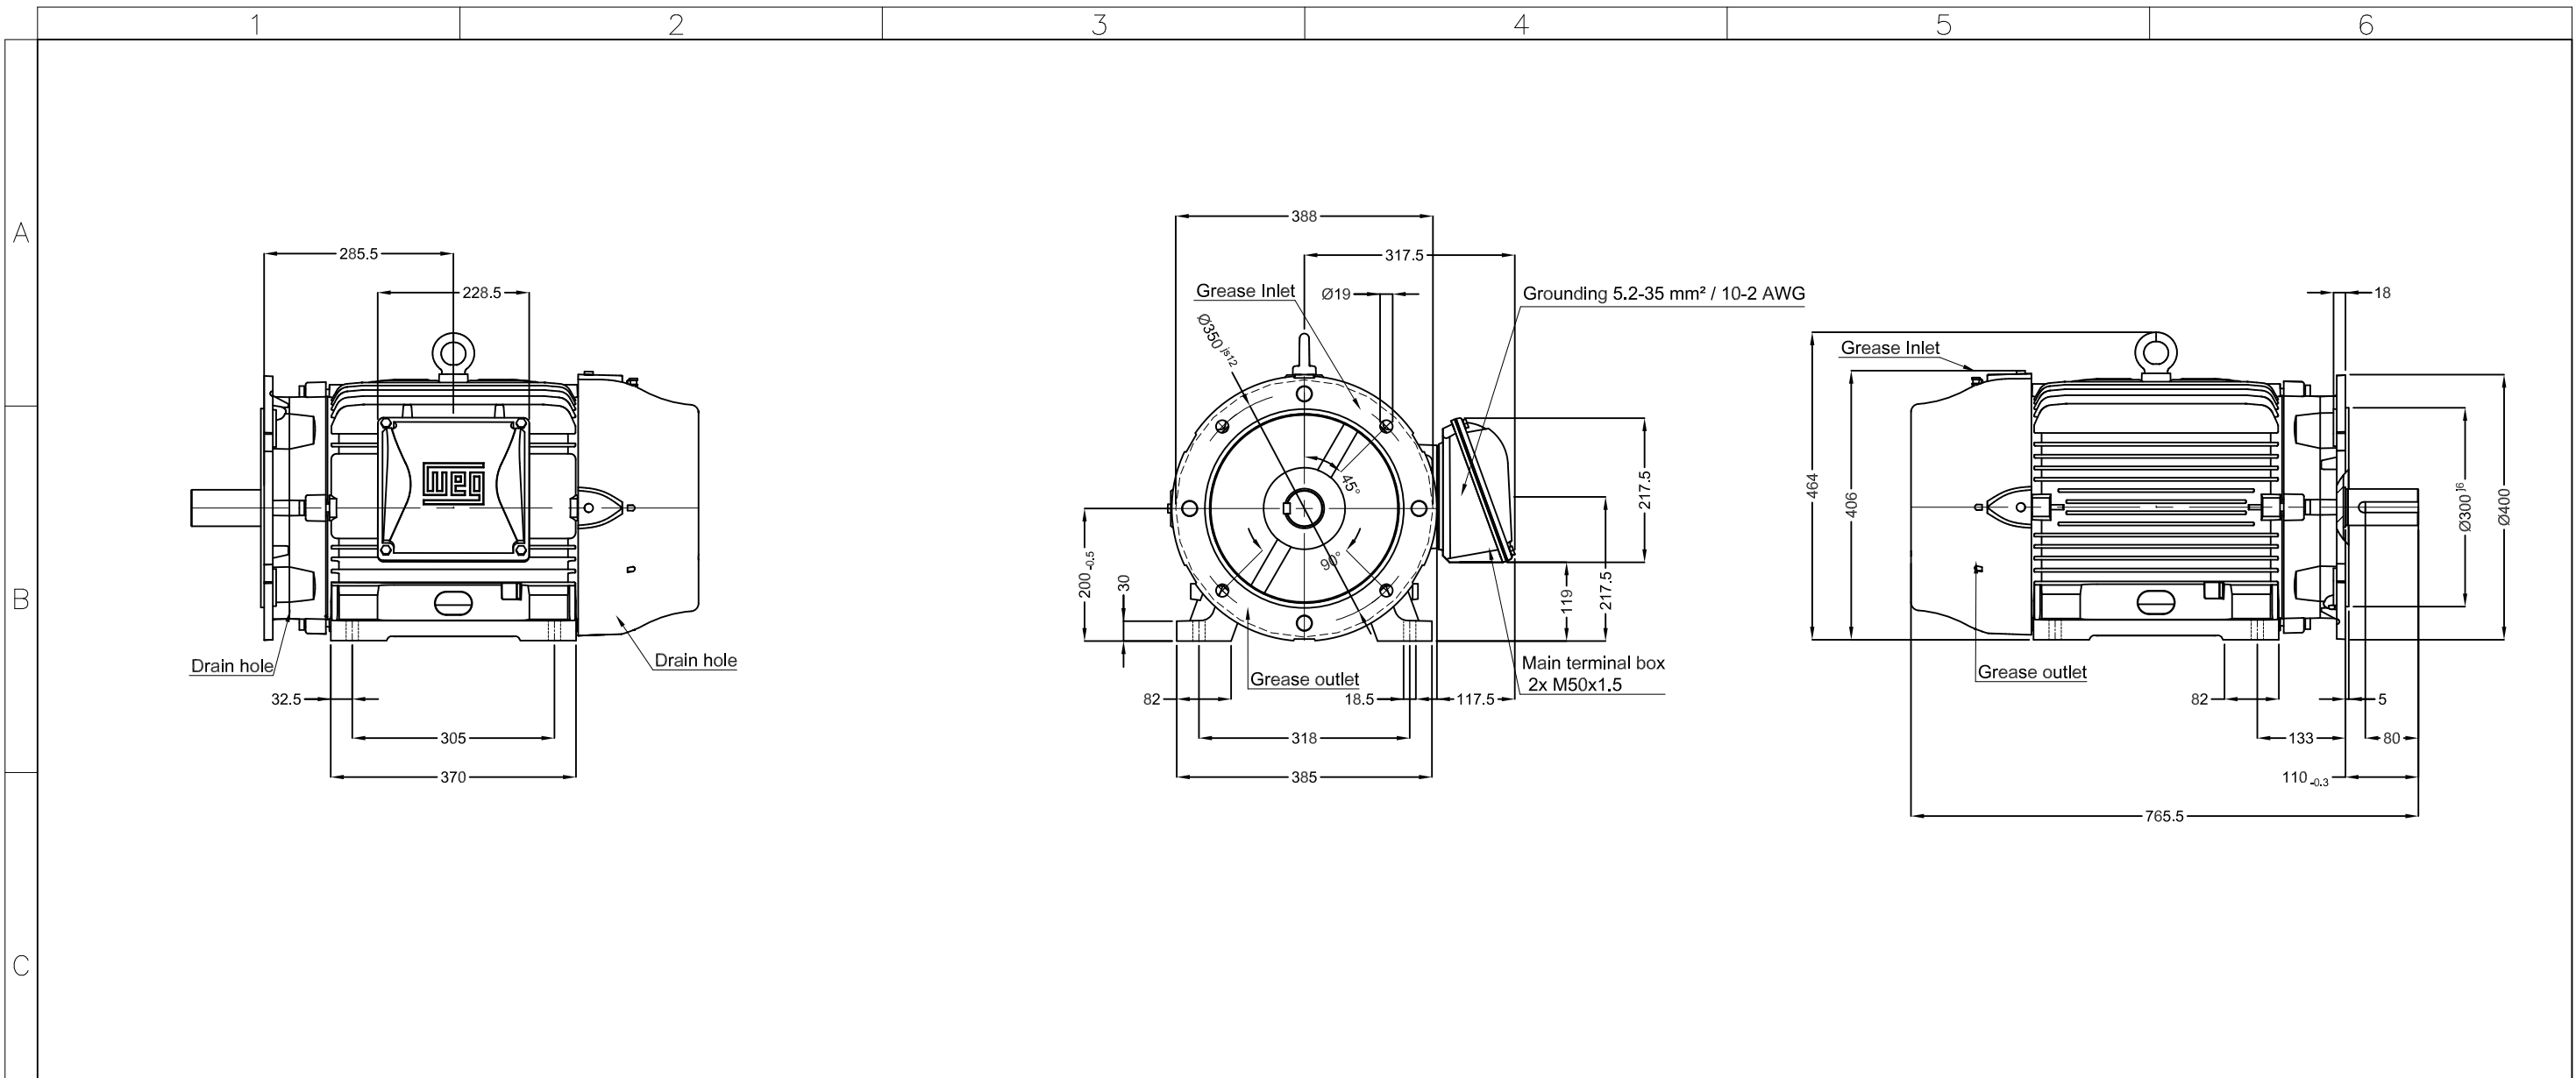

E	Color RAL 5009	<p>DE Shaft End DM20 WEG WPR-7339 (DS DIN332)</p>	40 HP 04 Poles 60 Hz	A
	Painting plan 203A			
	Mounting B35L(E)			

ECM	LOC		THREE PH. MOTOR W22 IE3	HYBRISUSER					00
EXECUTED	HYBRISUSER		FRAME 200L IP55 TEFC	EXECUTED	CHECKED	RELEASED	DATE	VER	
CHECKED									
RELEASED									
REL. DATE									

**PREVIEW**  
WDD 00  
SHEET /