

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer	:		
Product line	: NEMA Premium Efficiency Three-Phase	Product code :	12675363
Frame	: 182/4TC	Cooling method	: IC411 - TEFC
Insulation class	: F	Mounting	: F-1
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 42.9 kg
Protection degree	: IP55	Moment of inertia (J)	: 0.0169 kgm ²
Design	: B		
Output [HP]	3	3	3
Poles	4	4	4
Frequency [Hz]	60	50	50
Rated voltage [V]	230/460	190/380	220/415
Rated current [A]	7.62/3.81	9.08/4.54	8.30/4.40
L. R. Amperes [A]	67.1/33.5	60.8/30.4	62.3/33.0
LRC [A]	8.8x(Code K)	6.7x(Code H)	7.5x(Code J)
No load current [A]	4.00/2.00	3.95/1.97	3.99/2.11
Rated speed [RPM]	1765	1455	1460
Slip [%]	1.94	3.00	2.67
Rated torque [kgfm]	1.23	1.50	1.49
Locked rotor torque [%]	220	170	200
Breakdown torque [%]	300	260	290
Service factor	1.15	1.15	1.15
Temperature rise	80 K	80 K	80 K
Locked rotor time	32s (cold) 18s (hot)	0s (cold) 0s (hot)	0s (cold) 0s (hot)
Noise level ²	56.0 dB(A)	53.0 dB(A)	53.0 dB(A)
Efficiency (%)	25%	86.4	87.8
	50%	87.5	87.2
	75%	88.5	87.9
	100%	89.5	87.0
Power Factor	25%	0.36	0.39
	50%	0.61	0.65
	75%	0.74	0.77
	100%	0.81	0.83
Bearing type	: <u>Drive end</u> 6206 ZZ <u>Non drive end</u> 6205 ZZ	Foundation loads	
Sealing	: V'Ring Without Bearing Seal	Max. traction	: 69 kgf
Lubrication interval	: - -	Max. compression	: 112 kgf
Lubricant amount	: - -		
Lubricant type	: Mobil Polyrex EM		
Notes USABLE @208V 8.43A SF 1.00 SFA 8.43A			
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary	Performed	Checked
Performed by			
Checked by			
Date	13/05/2022		
		Page	Revision
		1 / 4	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase Product code : 12675363

LOAD PERFORMANCE CURVE

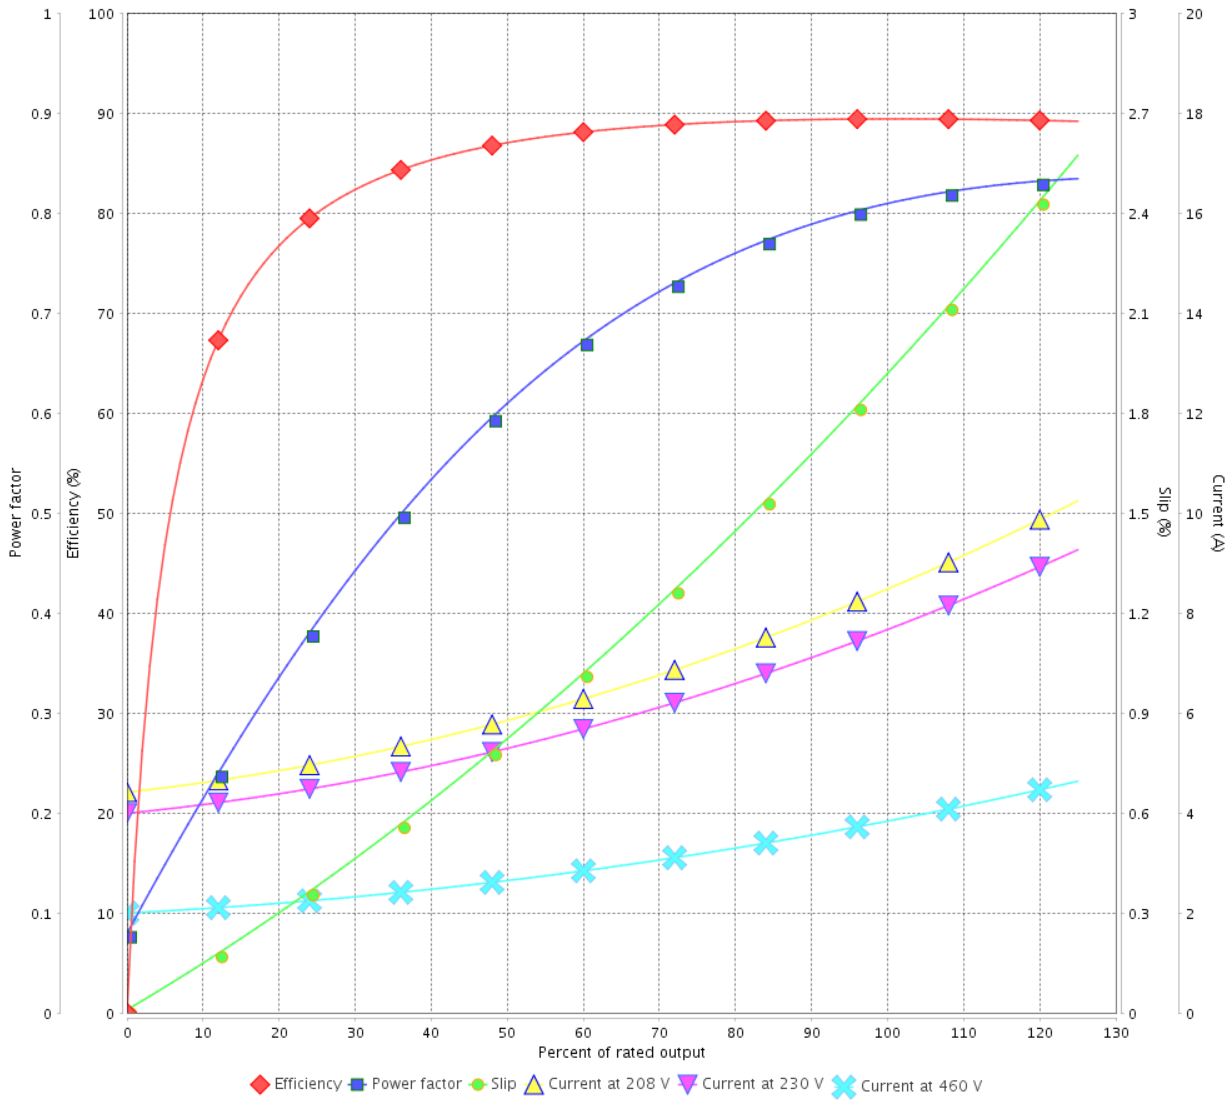

Performance : 230/460 V 60 Hz 4P

Rated current : 7.62/3.81 A
 LRC : 8.8
 Rated torque : 1.23 kgfm
 Locked rotor torque : 220 %
 Breakdown torque : 300 %
 Rated speed : 1765 rpm

Moment of inertia (J) : 0.0169 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : NEMA Premium Efficiency Three-Phase Product code : 12675363

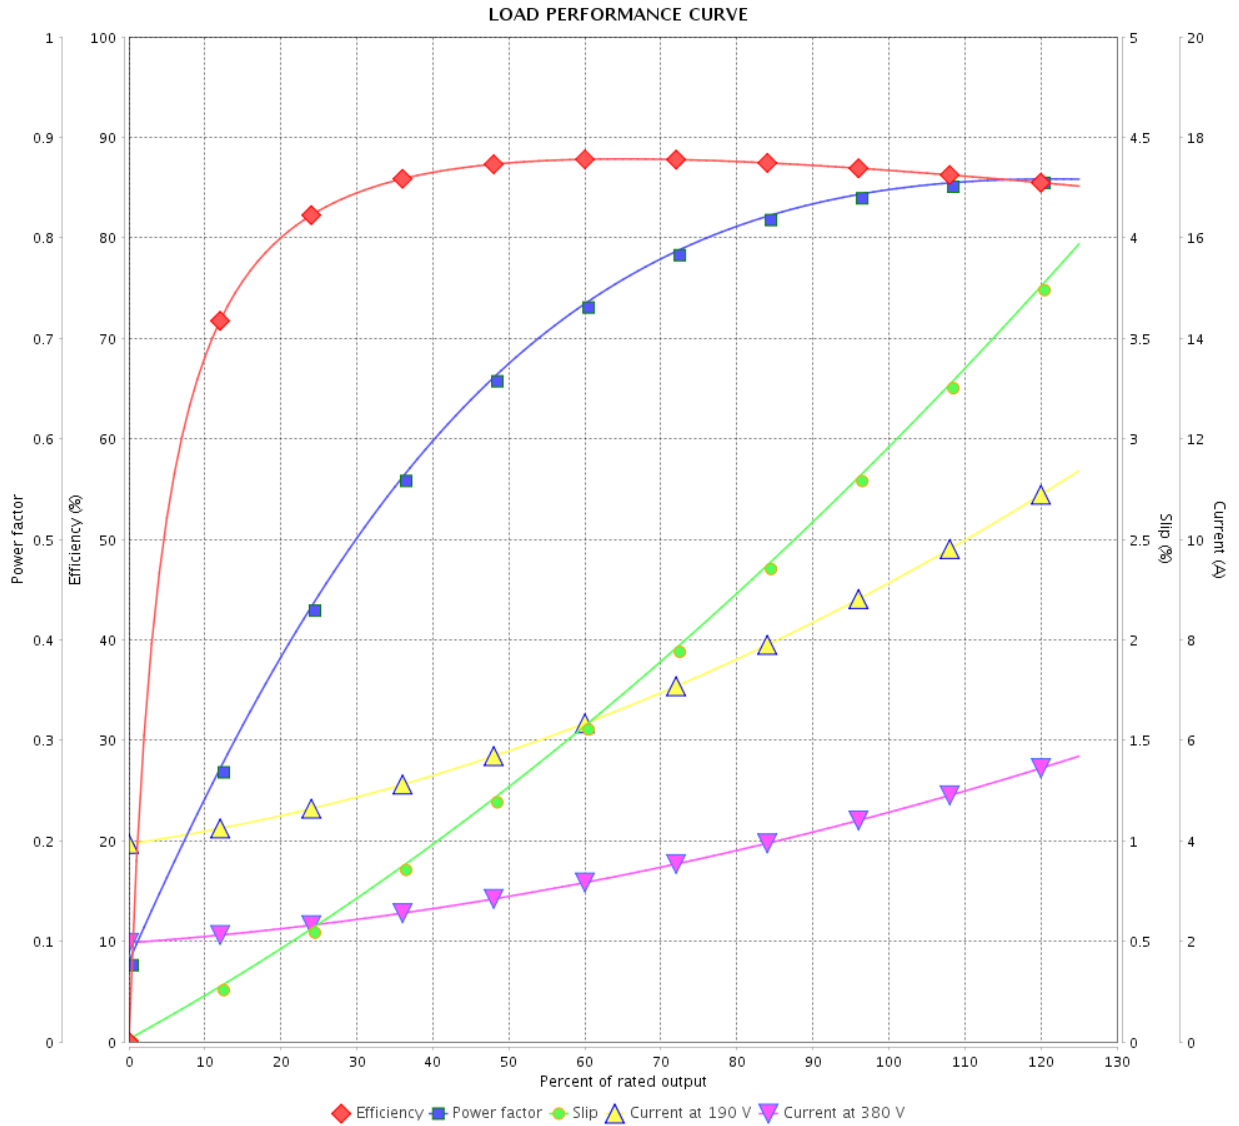

Performance : 190/380 V 50 Hz 4P

Rated current : 9.08/4.54 A
 LRC : 6.7
 Rated torque : 1.50 kgfm
 Locked rotor torque : 170 %
 Breakdown torque : 260 %
 Rated speed : 1455 rpm

Moment of inertia (J) : 0.0169 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : NEMA Premium Efficiency Three-Phase Product code : 12675363

LOAD PERFORMANCE CURVE

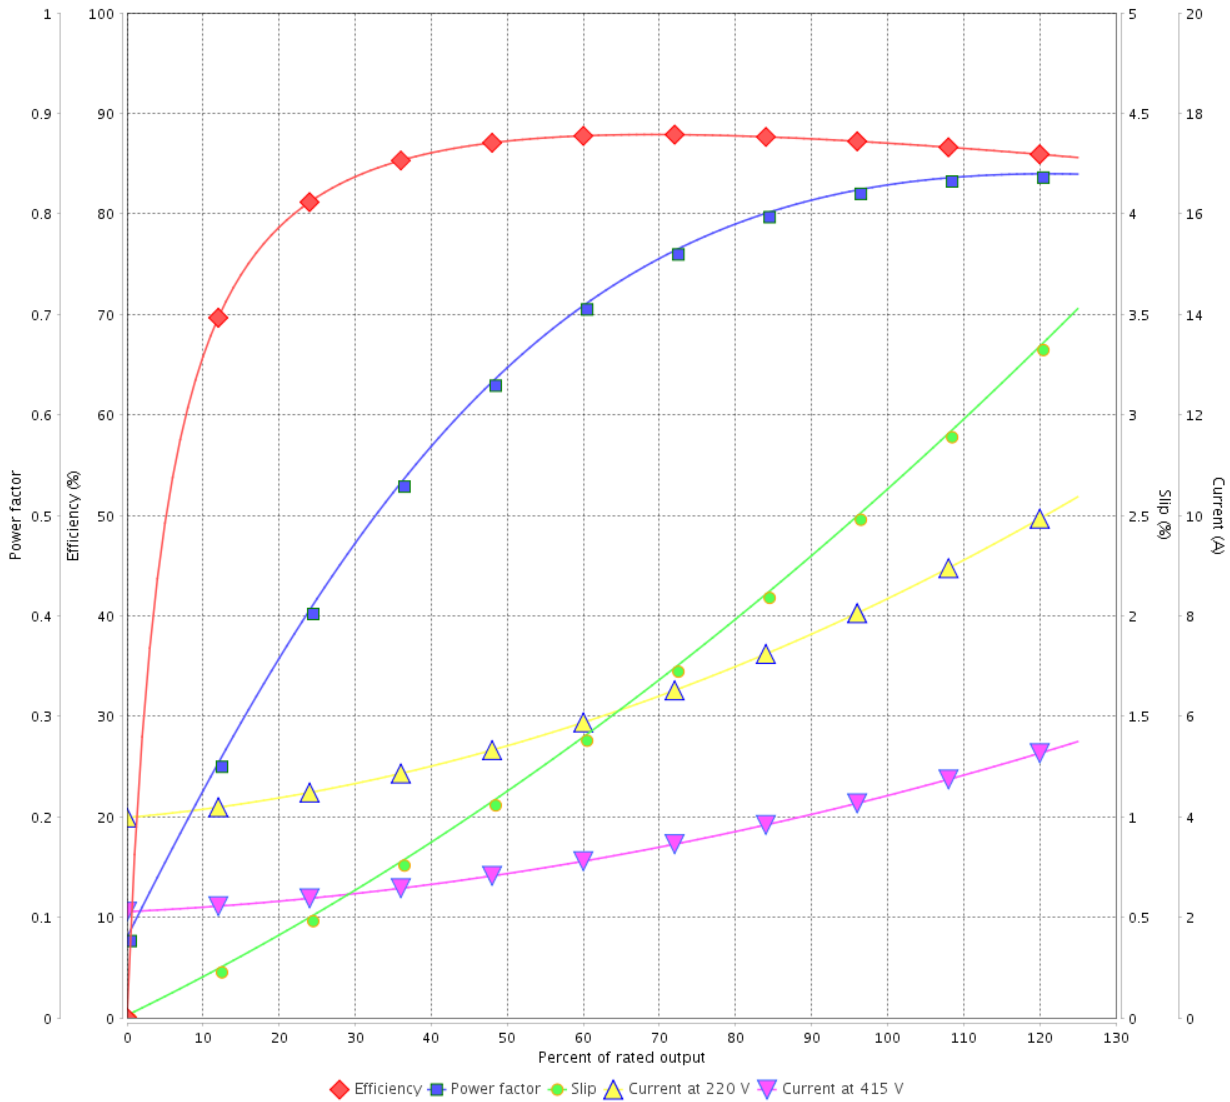

Performance : 220/415 V 50 Hz 4P

Rated current : 8.30/4.40 A
 LRC : 7.5
 Rated torque : 1.49 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 290 %
 Rated speed : 1460 rpm

Moment of inertia (J) : 0.0169 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

1 2 3 4 5 6





A

B

C

D

E

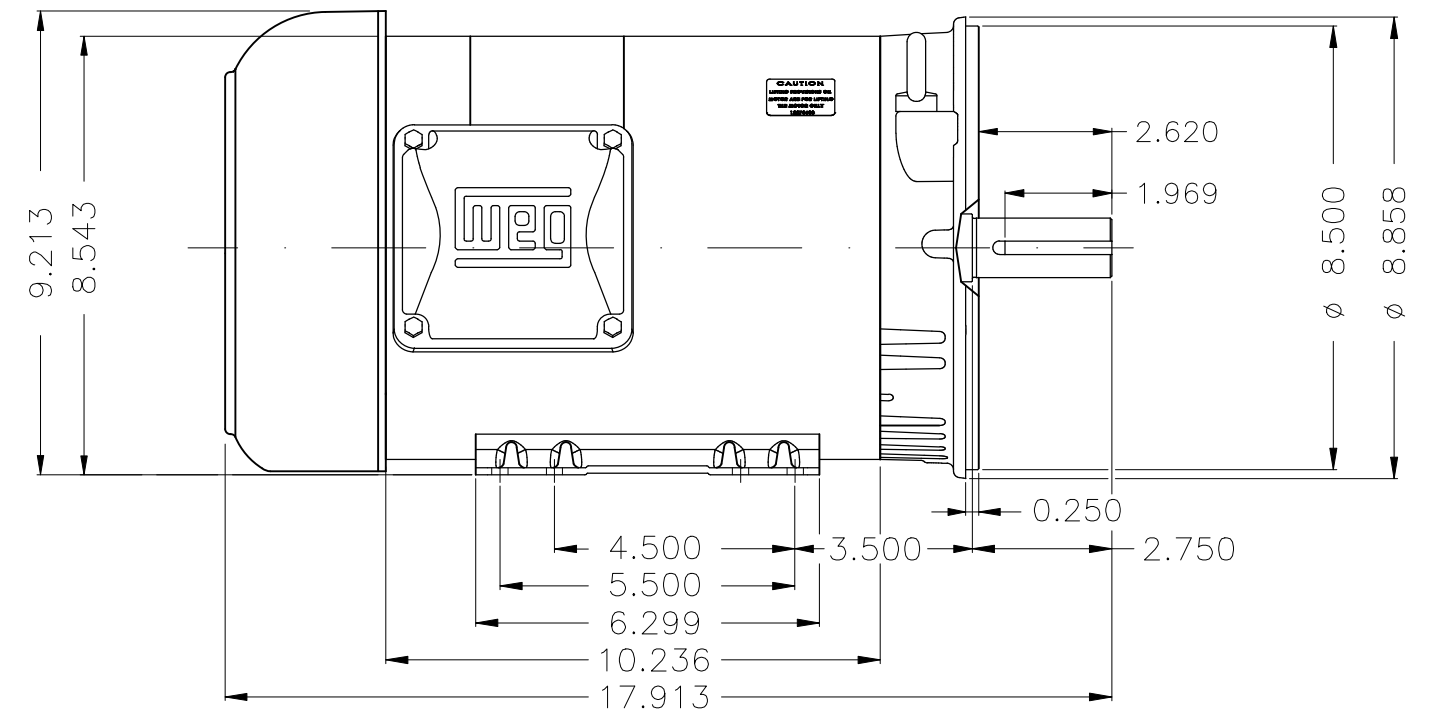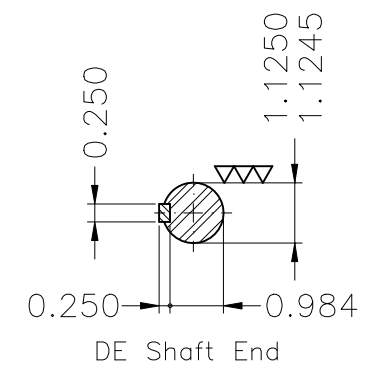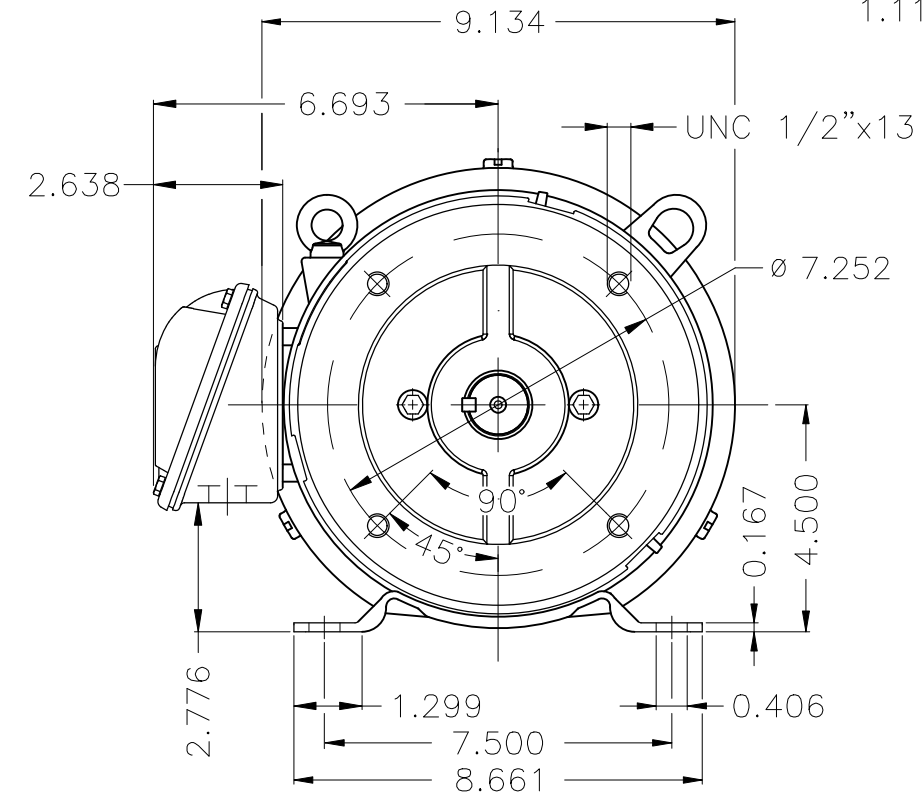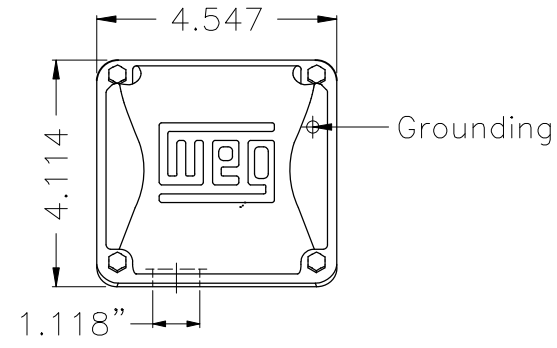

Color Munsell N 1 matte black											
Painting plan 207N											
Mounting B34D											
								HYBRISUSER	00		
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL NEMA PREM. EFF.					PREVIEW				
CHECKED		FRAME 182/4TC IP55 TEFC					WDD		00		
RELEASED							SHEET		1 / 1		
REL. DATE		WMO	Jaragua do Sul	Product Engineering							

3 HP 04 Poles 60 Hz

A