

DATA SHEET



Single Phase Induction Motor - Squirrel Cage

Customer :					
Product line		: Compressor Duty Single-Phase		Product code : 10698252	
Frame	: F56H	Locked rotor time	: 10s (cold) 6s (hot)		
Output	: 3 HP (2.2 kW)	Temperature rise	: 80 K		
Poles	: 2	Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C		
Rated voltage	: 115/208-230 V	Altitude	: 1000 m.a.s.l.		
Rated current	: 29.4/16.2-14.7 A	Protection degree	: IP21		
L. R. Amperes	: 176/97.2-88.2 A	Cooling method	: IC01 - ODP		
LRC	: 6.0x(Code H)	Mounting	: F-1		
No load current	: 13.0/5.60-6.50 A	Rotation ¹	: Both (CW and CCW)		
Rated speed	: 3440 rpm	Starting method	: Direct On Line		
Slip	: 4.44 %	Approx. weight ³	: 19.3 kg		
Rated torque	: 0.633 kgfm				
Locked rotor torque	: 180 %				
Breakdown torque	: 190 %				
Insulation class	: B				
Service factor	: 1.00				
Moment of inertia (J)	: 0.0028 kgm ²				
Output	50%	75%	100%	Foundation loads	
Efficiency (%)	76.0	77.0	77.0	Max. traction : 29 kgf	
Power Factor	0.70	0.80	0.86	Max. compression : 48 kgf	
		<u>Drive end</u>	<u>Non drive end</u>		
Bearing type	:	6204 ZZ	6203 ZZ		
Sealing	:	Without Bearing Seal	Without Bearing Seal		
Lubrication interval	:	-	-		
Lubricant amount	:	-	-		
Lubricant type	:	Mobil Polyrex EM			
Notes					
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>			<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	21/12/2024			1 / 2	


LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Compressor Duty Single-Phase Product code : 10698252

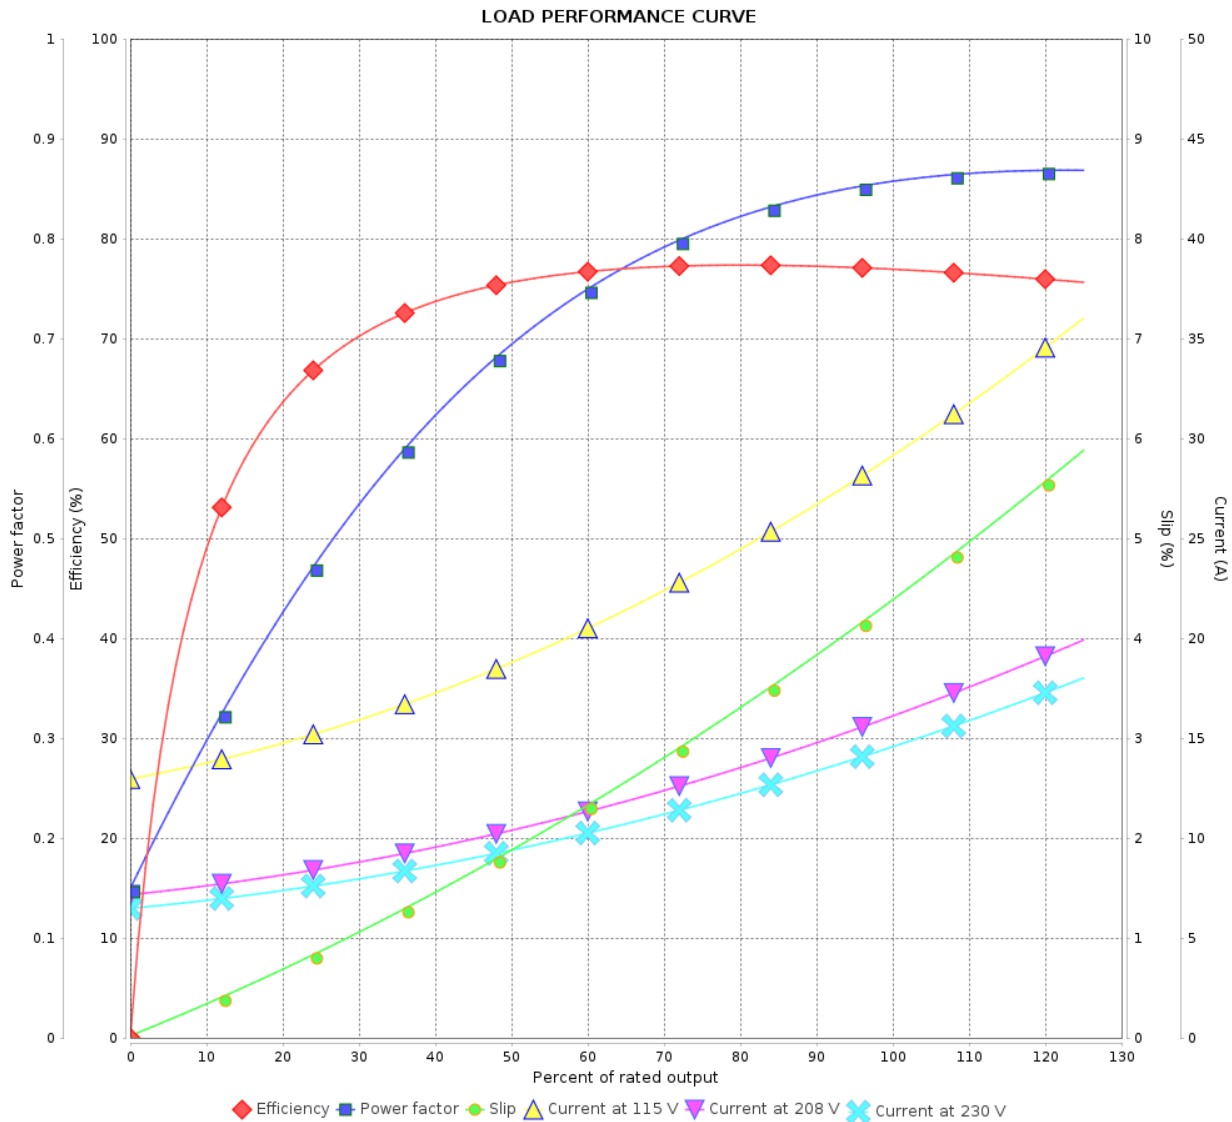

Performance : 115/208-230 V 60 Hz 2P

Rated current : 29.4/16.2-14.7 A
 LRC : 6.0
 Rated torque : 0.633 kgfm
 Locked rotor torque : 180 %
 Breakdown torque : 190 %
 Rated speed : 3440 rpm

Moment of inertia (J) : 0.0028 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : B
 Service factor :
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

