

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 11441757

Frame : 182/4TC	Cooling method : IC411 - TEFC
Insulation class : F	Mounting : F-1
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line
Altitude : 1000 m.a.s.l.	Approx. weight ³ : 43.3 kg
Protection degree : IP55	Moment of inertia (J) : 0.0094 kgm ²
Design : B	

Output [HP]	5	4	4	4	5	5	5
Poles	2	2	2	2	2	2	2
Frequency [Hz]	60	50	50	50	50	50	50
Rated voltage [V]	230/460	380	400	415	380	400	415
Rated current [A]	11.8/5.90	5.85	5.57	5.43	7.14	6.78	6.61
L. R. Amperes [A]	89.7/44.8	44.5	46.8	50.5	42.8	46.1	49.6
LRC [A]	7.6x(Code J)	7.6x(Code J)	8.4x(Code K)	9.3x(Code L)	6.0x(Code G)	6.8x(Code H)	7.5x(Code J)
No load current [A]	4.00/2.00	1.90	2.00	2.10	1.90	2.00	2.10
Rated speed [RPM]	3500	2900	2915	2920	2860	2880	2895
Slip [%]	2.78	3.33	2.83	2.67	4.67	4.00	3.50
Rated torque [kgfm]	1.04	1.00	0.996	0.994	1.27	1.26	1.25
Locked rotor torque [%]	229	220	250	270	180	200	220
Breakdown torque [%]	350	310	350	380	240	270	300
Service factor	1.25	1.25	1.25	1.25	1.25	1.25	1.25
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K
Locked rotor time	30s (cold) 17s (hot)	32s (cold) 18s (hot)	32s (cold) 18s (hot)	28s (cold) 16s (hot)	23s (cold) 13s (hot)	25s (cold) 14s (hot)	23s (cold) 13s (hot)
Noise level ²	66.0 dB(A)	62.0 dB(A)	62.0 dB(A)	62.0 dB(A)	62.0 dB(A)	62.0 dB(A)	62.0 dB(A)
Efficiency (%)	25%	0.000			0.000		
	50%	86.5	86.3	86.3	86.1	87.5	87.5
	75%	88.3	87.7	88.2	88.2	87.5	88.5
	100%	88.5	87.5	88.3	88.3	86.5	87.5
Power Factor	25%	0.00			0.00		
	50%	0.76	0.74	0.71	0.68	0.81	0.76
	75%	0.85	0.85	0.83	0.81	0.88	0.87
	100%	0.89	0.89	0.88	0.87	0.91	0.89

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	12.4	13.7	12.7	12.7	14.9	13.7	13.7
	P2 (0,5;1,0)	10.3	11.3	10.5	10.5	12.3	11.3	11.3
	P3 (0,25;1,0)	9.8	10.8	10.0	10.0	11.8	10.8	10.8
	P4 (0,9;0,5)	6.2	6.8	6.3	6.3	7.5	6.8	6.8
	P5 (0,5;0,5)	3.9	4.3	4.0	4.0	4.7	4.3	4.3
	P6 (0,5;0,25)	2.5	2.7	2.5	2.5	3.0	2.7	2.7
	P7 (0,25;0,25)	1.6	1.8	1.6	1.6	1.9	1.8	1.8

Bearing type : 6207 ZZ	Non drive end : 6206 ZZ	Foundation loads
Sealing : V'Ring	V'Ring	Max. traction : 57 kgf
Lubrication interval : -	-	Max. compression : 100 kgf
Lubricant amount : -	-	
Lubricant type : 00088		

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	13/11/2025		Page 1 / 9	Revision

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes
USABLE @208V 13.1A SF 1.15 SFA 15.0A

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page 2 / 9		Revision
Checked by					
Date	13/11/2025				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11441757

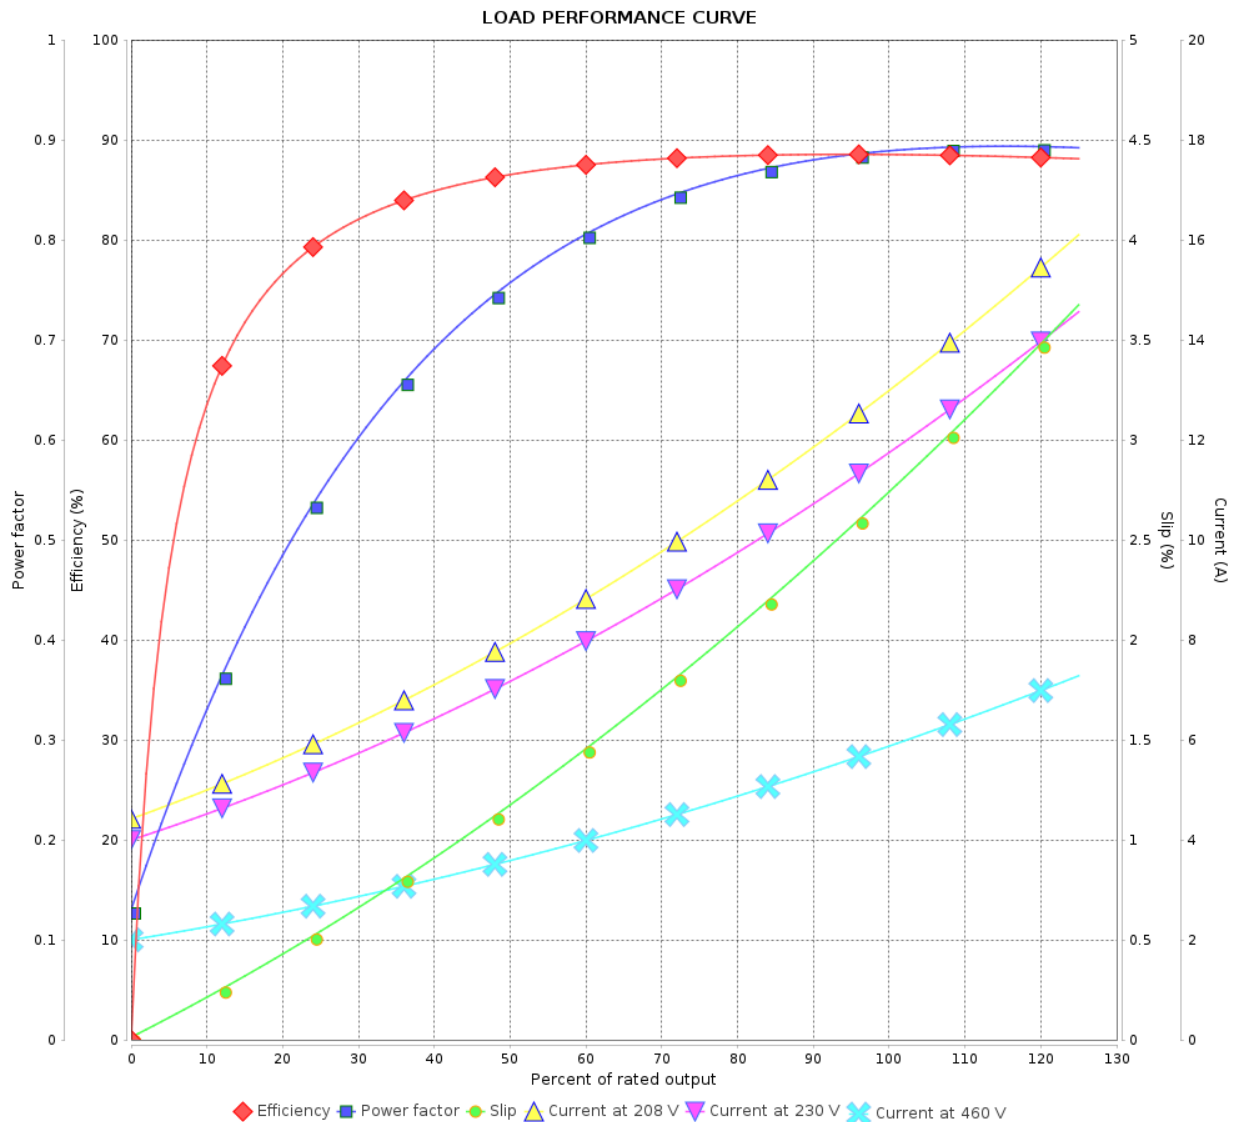

Performance : 230/460 V 60 Hz 2P

Rated current : 11.8/5.90 A
LRC : 7.6
Rated torque : 1.04 kgfm
Locked rotor torque : 229 %
Breakdown torque : 350 %
Rated speed : 3500 rpm

Moment of inertia (J) : 0.0094 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 9Revision		
Checked by				
Date	13/11/2025			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11441757

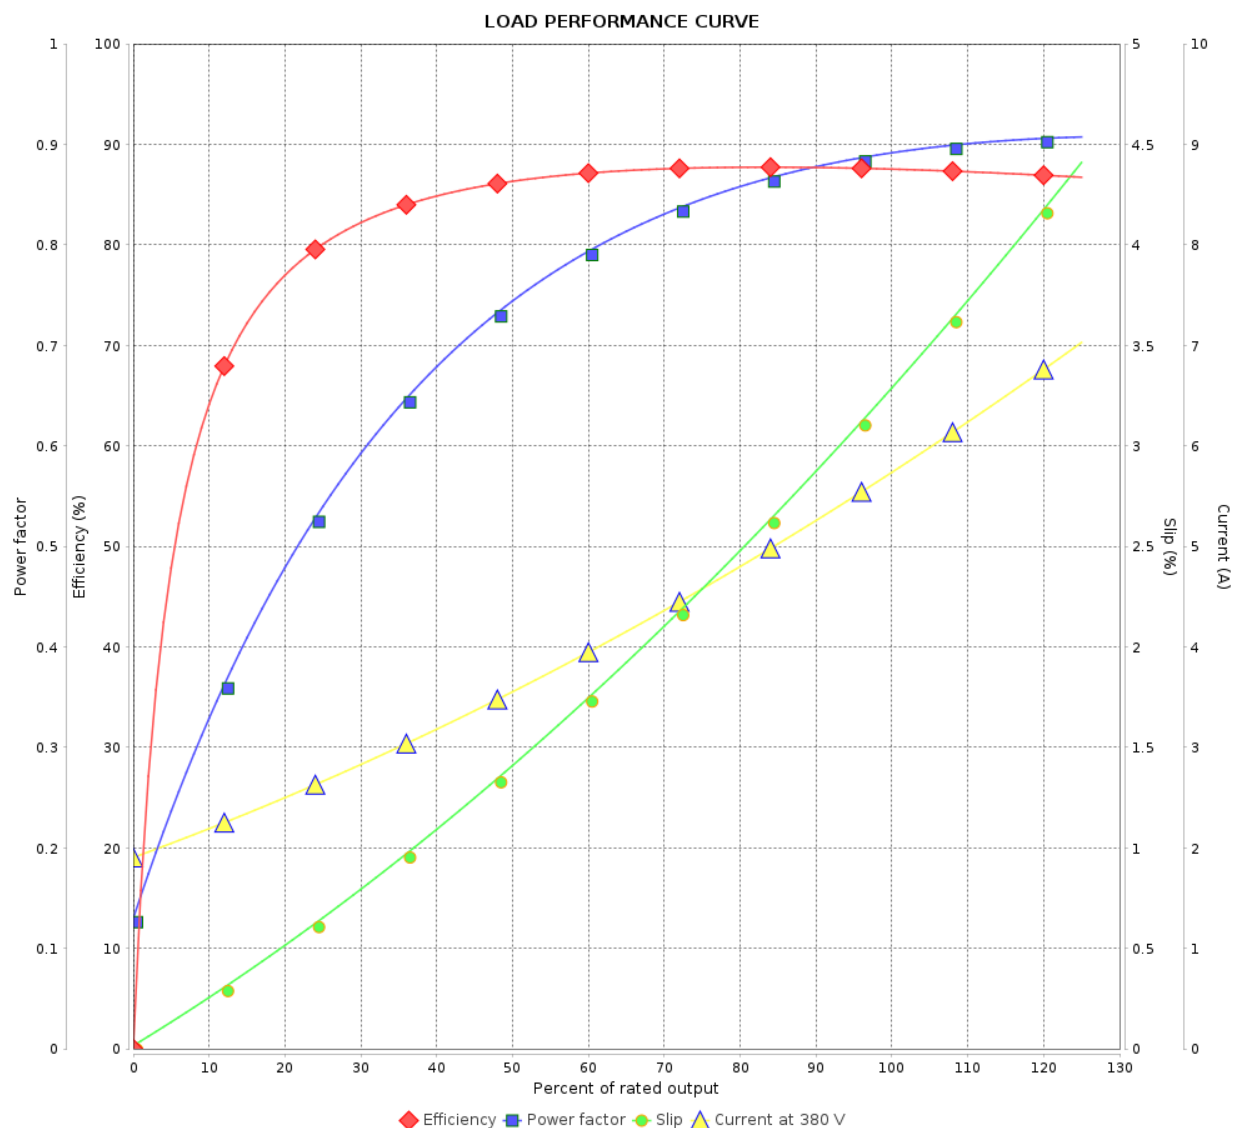

Performance : 380 V 50 Hz 2P IE3

Rated current : 5.85 A
LRC : 7.6
Rated torque : 1.00 kgfm
Locked rotor torque : 220 %
Breakdown torque : 310 %
Rated speed : 2900 rpm

Moment of inertia (J) : 0.0094 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				4 / 9	
Date					

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11441757

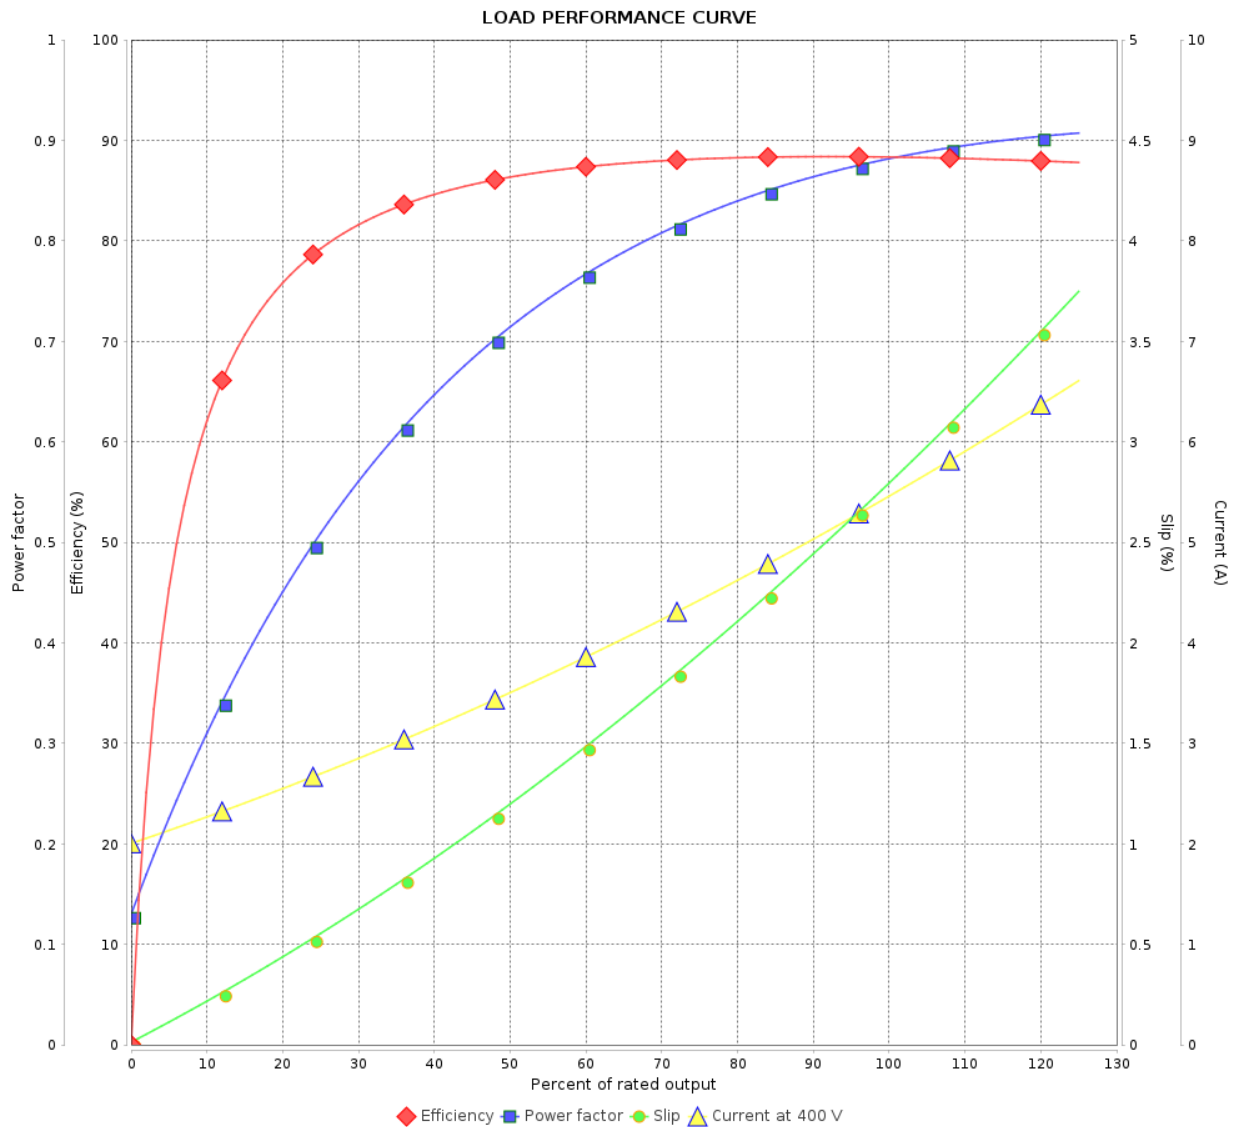

Performance : 400 V 50 Hz 2P IE3

Rated current : 5.57 A
LRC : 8.4
Rated torque : 0.996 kgfm
Locked rotor torque : 250 %
Breakdown torque : 350 %
Rated speed : 2915 rpm

Moment of inertia (J) : 0.0094 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 5 / 9Revision		
Checked by				
Date	13/11/2025			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11441757

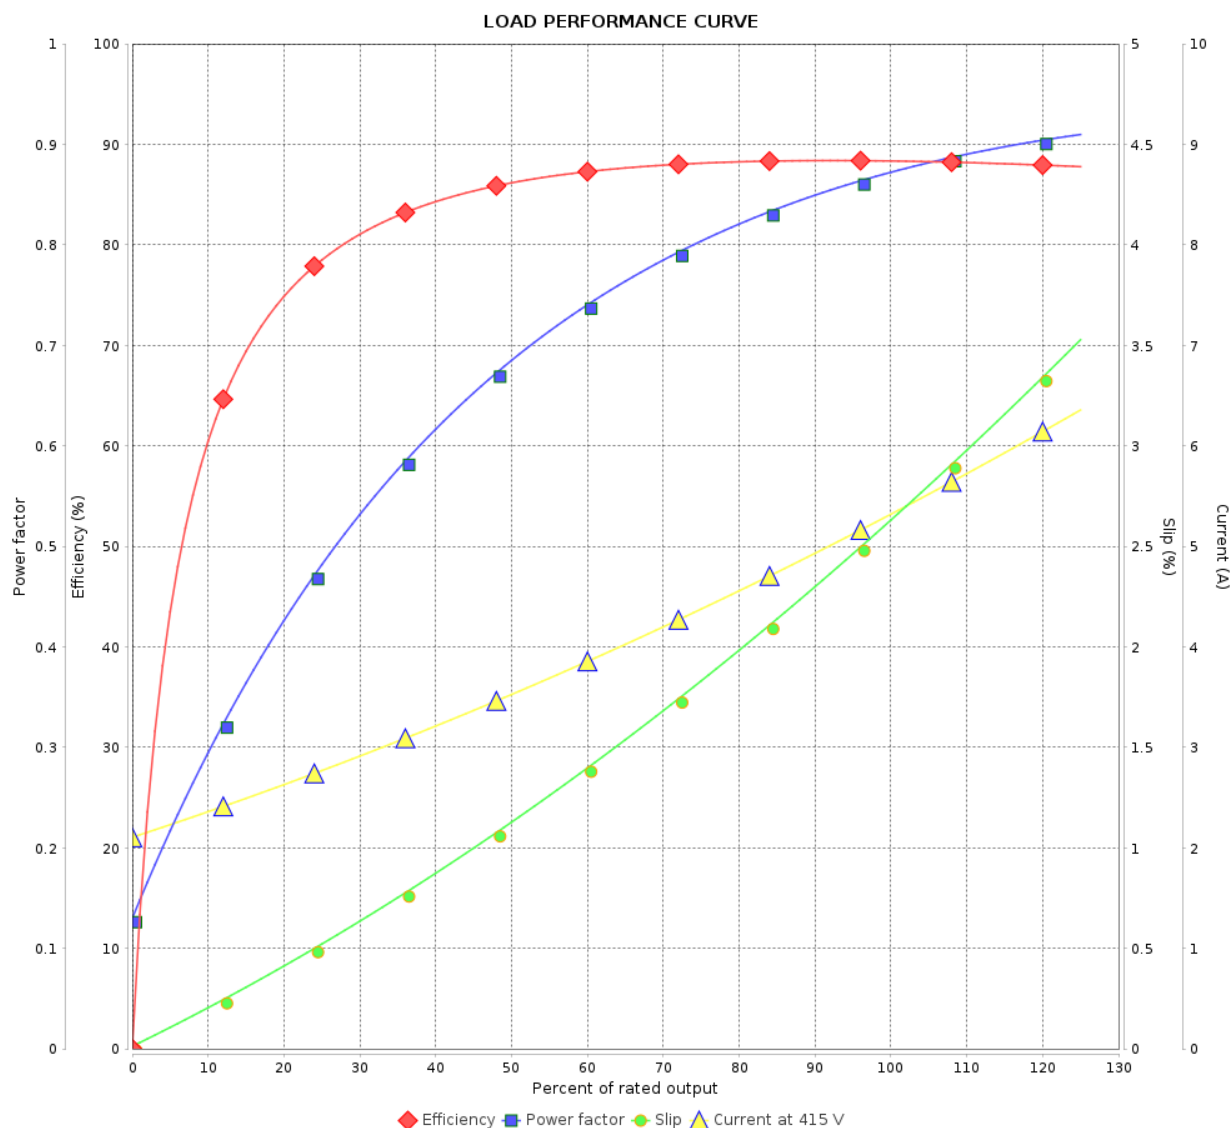

Performance : 415 V 50 Hz 2P IE3

Rated current : 5.43 A
LRC : 9.3
Rated torque : 0.994 kgfm
Locked rotor torque : 270 %
Breakdown torque : 380 %
Rated speed : 2920 rpm

Moment of inertia (J) : 0.0094 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 6 / 9	Revision
Checked by					
Date	13/11/2025				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11441757

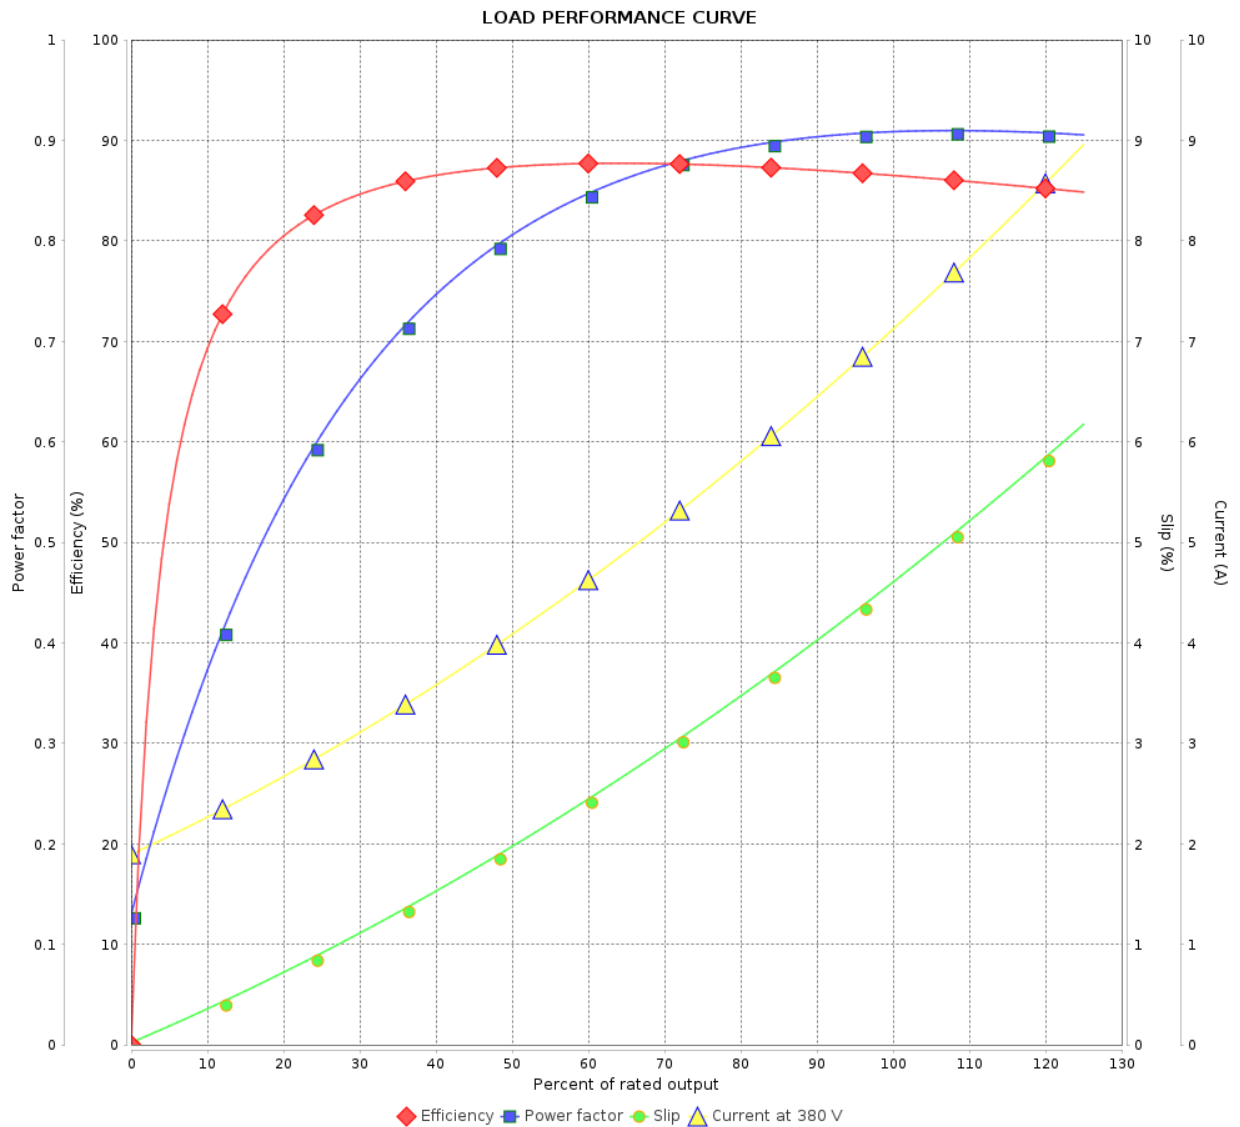

Performance : 380 V 50 Hz 2P IE2

Rated current : 7.14 A
LRC : 6.0
Rated torque : 1.27 kgfm
Locked rotor torque : 180 %
Breakdown torque : 240 %
Rated speed : 2860 rpm

Moment of inertia (J) : 0.0094 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 7 / 9Revision		
Checked by				
Date	13/11/2025			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11441757

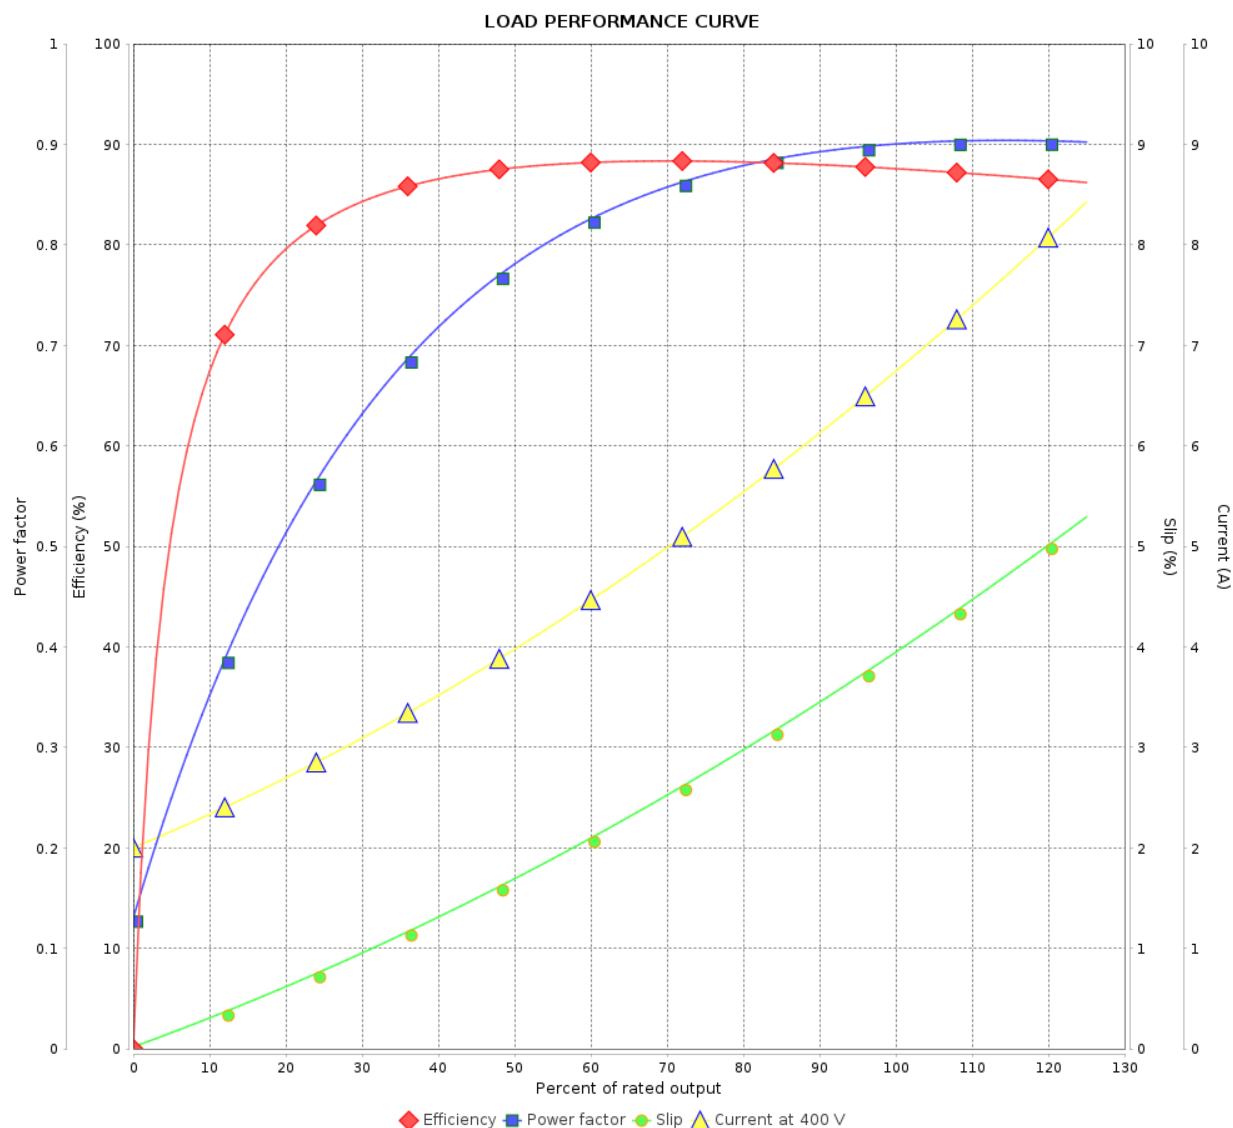

Performance : 400 V 50 Hz 2P IE2

Rated current : 6.78 A
LRC : 6.8
Rated torque : 1.26 kgfm
Locked rotor torque : 200 %
Breakdown torque : 270 %
Rated speed : 2880 rpm

Moment of inertia (J) : 0.0094 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 8 / 9 Revision		
Checked by				
Date	13/11/2025			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 11441757

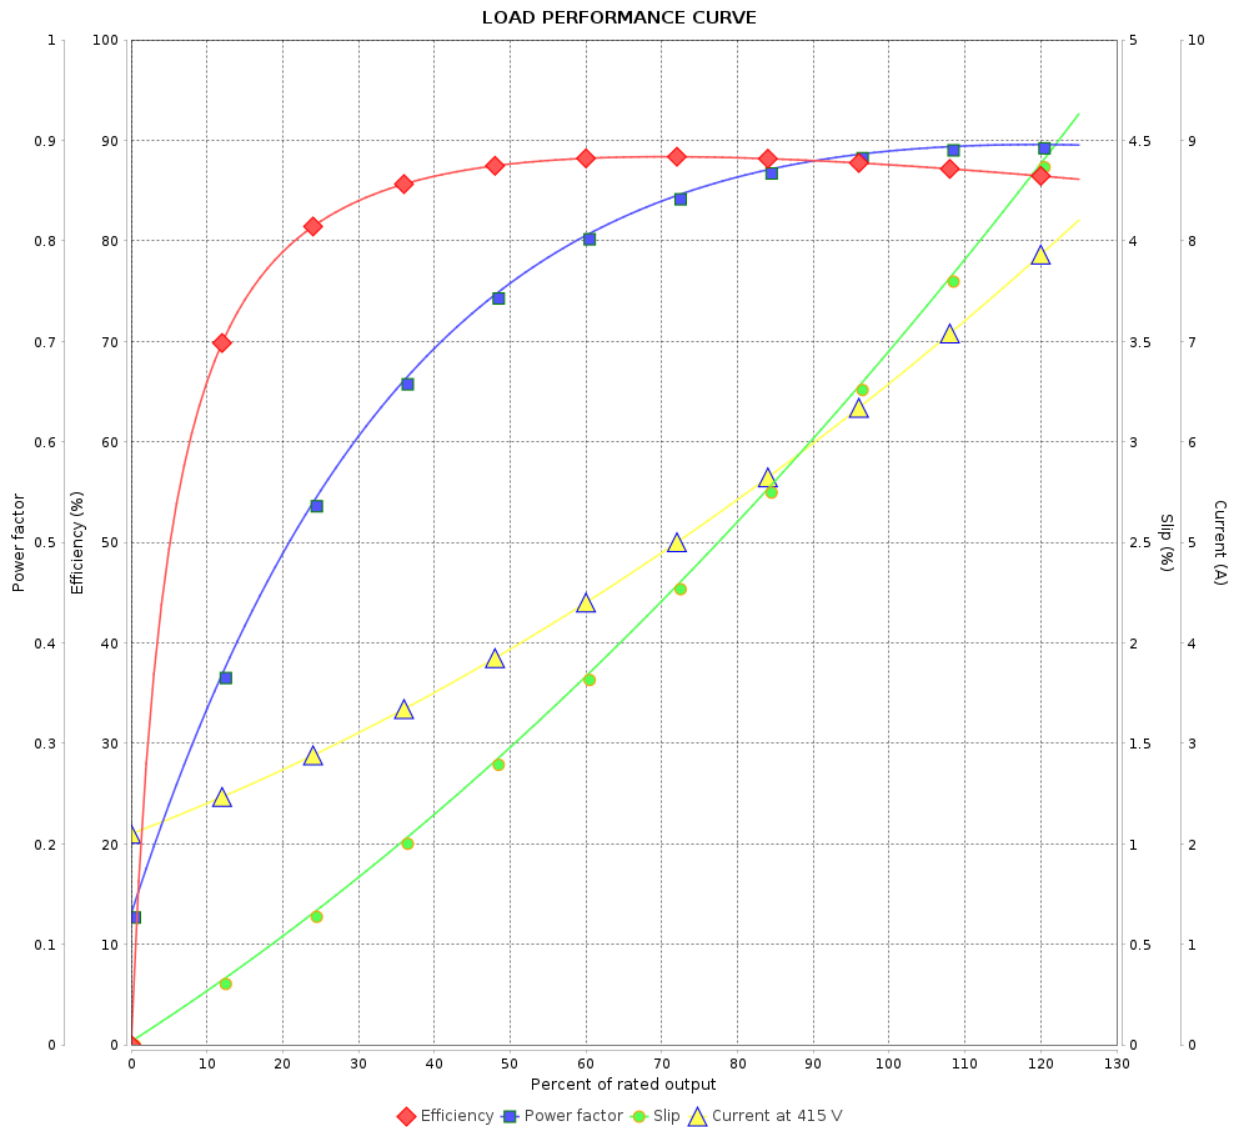


Performance : 415 V 50 Hz 2P IE2

Rated current : 6.61 A
LRC : 7.5
Rated torque : 1.25 kgfm
Locked rotor torque : 220 %
Breakdown torque : 300 %
Rated speed : 2895 rpm

Moment of inertia (J) : 0.0094 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.25
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 9 / 9	Revision
Checked by					
Date	13/11/2025				

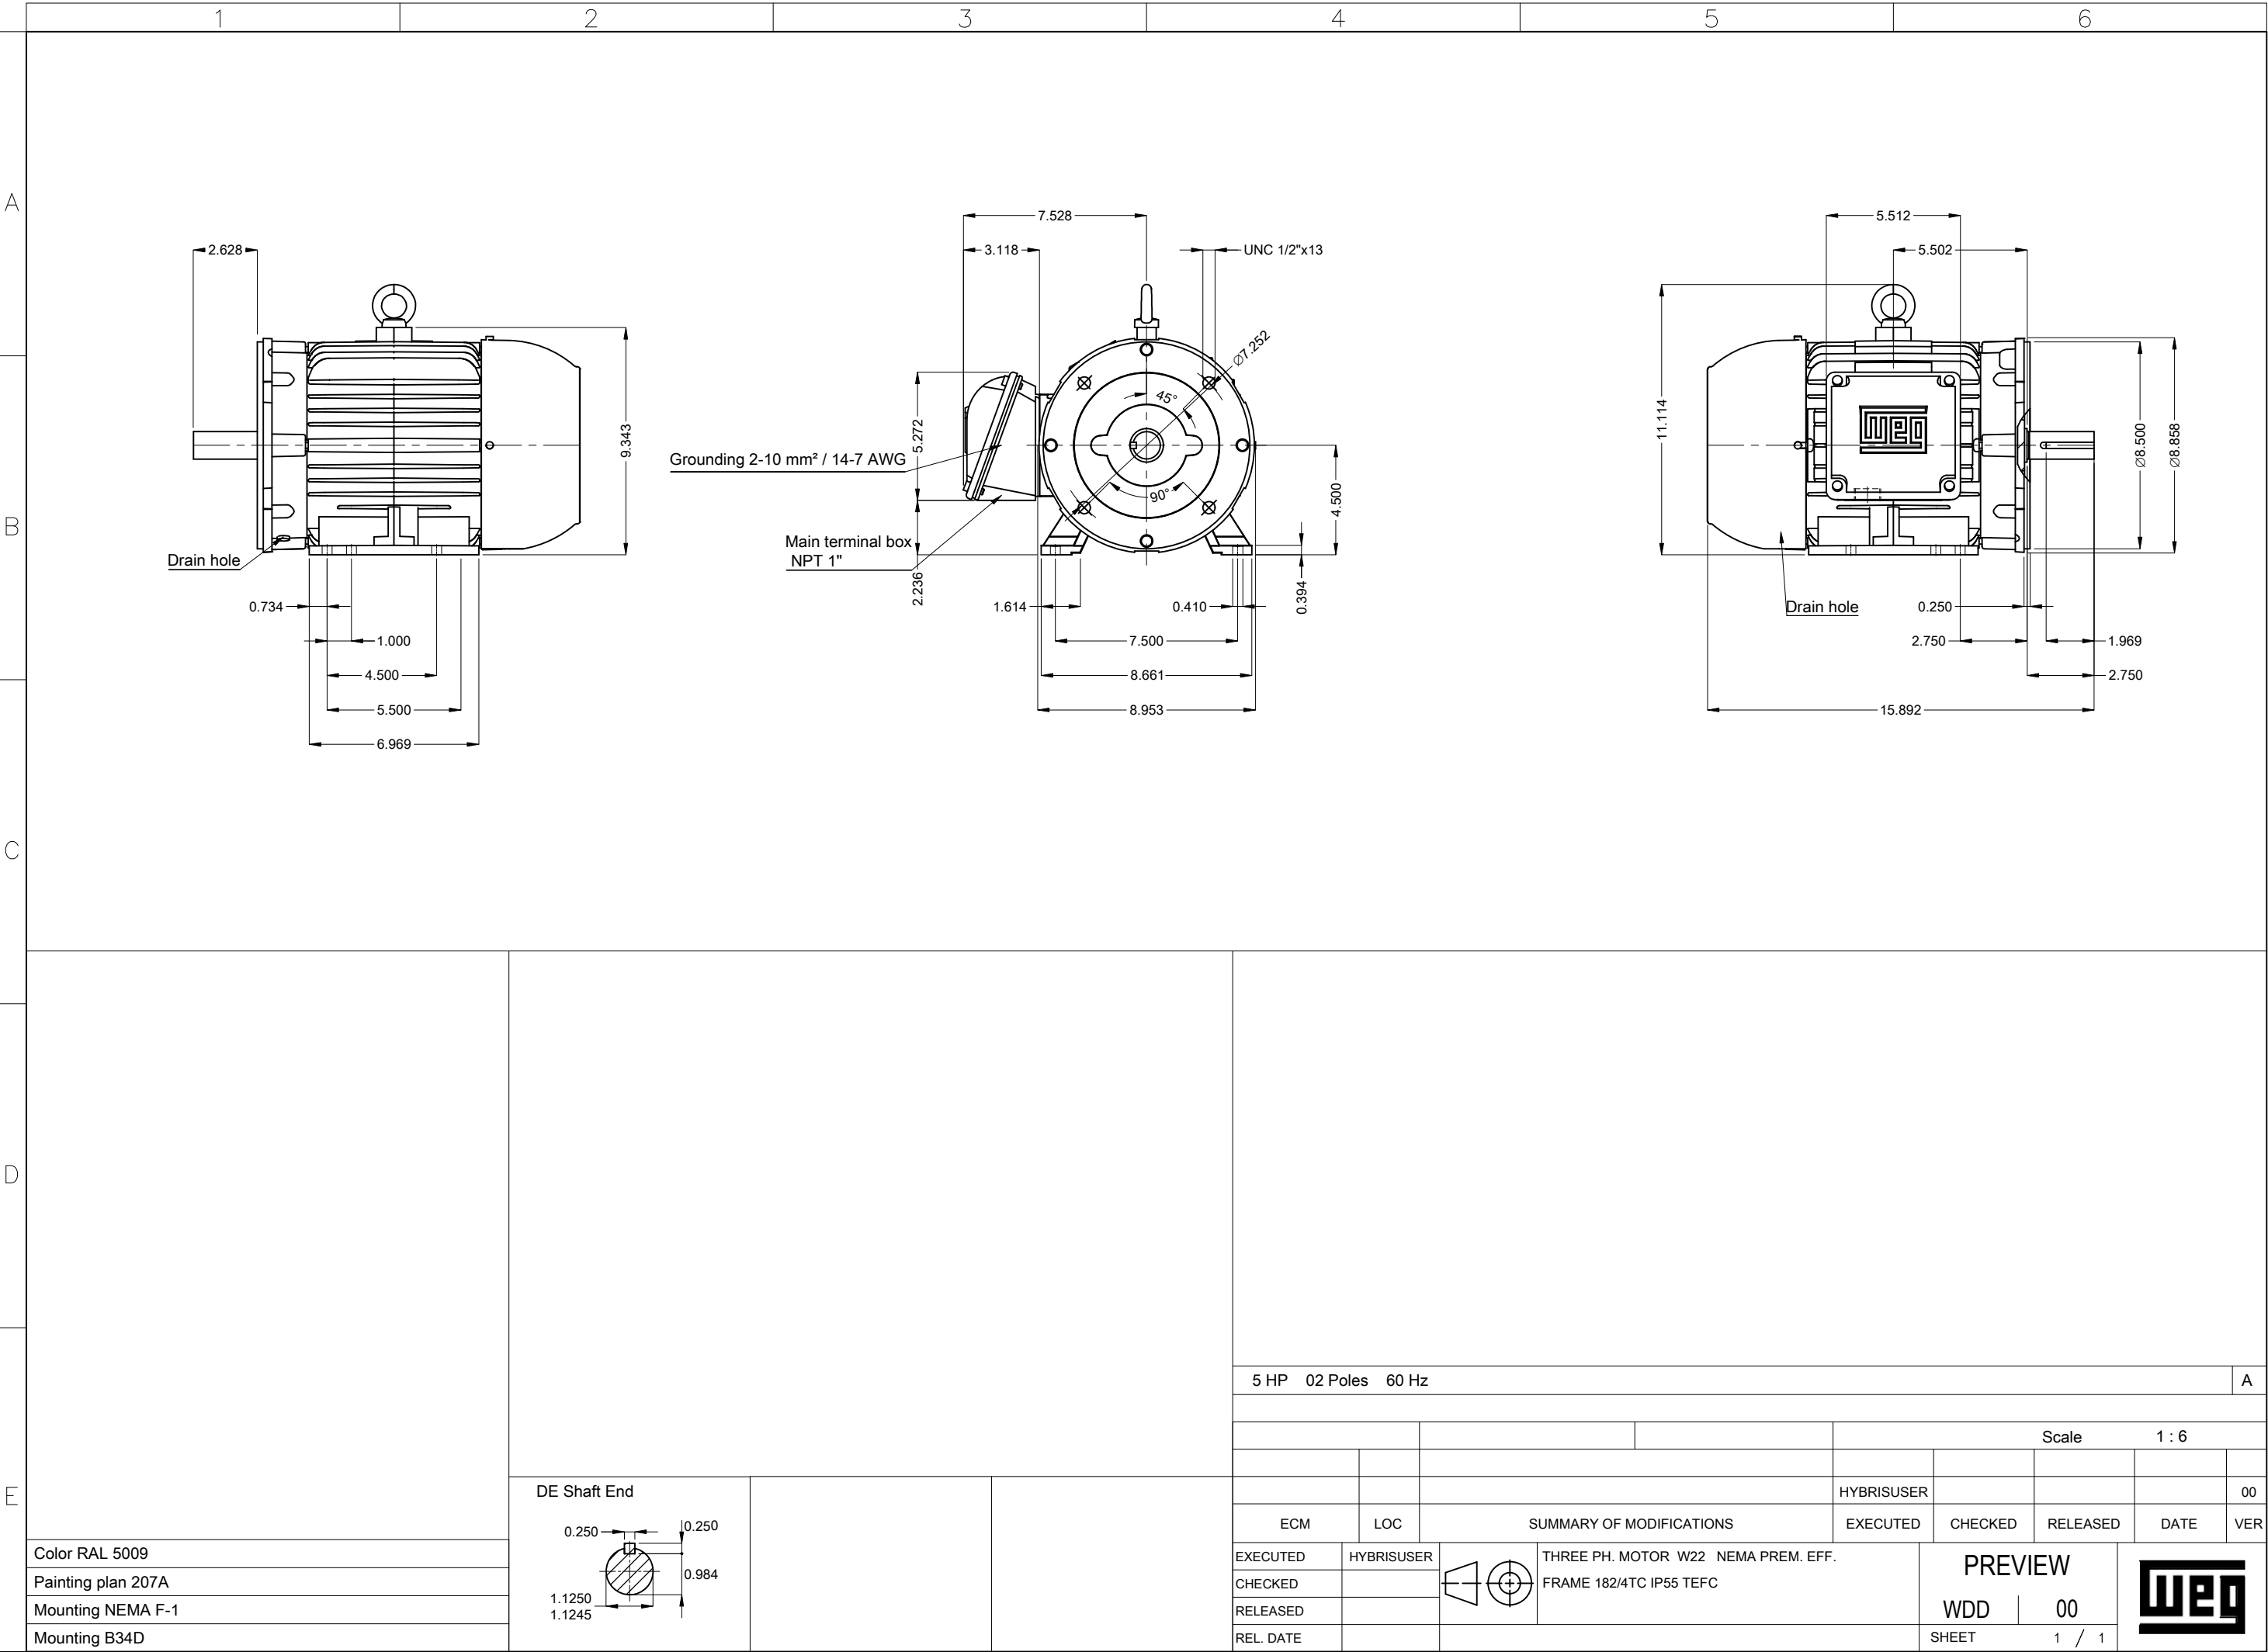

Dimensions in inches

A3