

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer :				
Product line : Single-Phase		Product code : 14459510		
Frame	: 56C	Cooling method	: IC01 - ODP	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 15.0 kg	
Design	: N	Moment of inertia (J)	: 0.0041 kgm ²	
Output [HP]	0.75			
Poles	4			
Frequency [Hz]	60			
Rated voltage [V]	115/208-230			
Rated current [A]	6.80/3.76-3.40			
L. R. Amperes [A]	54.4/30.1-27.2			
LRC [A]	8.0x(Code K)			
No load current [A]	2.60/1.12-1.30			
Rated speed [RPM]	1750			
Slip [%]	2.78			
Rated torque [kgfm]	0.311			
Locked rotor torque [%]	260			
Breakdown torque [%]	250			
Service factor				
Temperature rise	80 K			
Locked rotor time	36s (cold) 20s (hot)			
Noise level ²	52.0 dB(A)			
Efficiency (%)	25%			
	50%	74.0		
	75%	79.0		
	100%	81.8		
Power Factor	25%			
	50%	0.74		
	75%	0.82		
	100%	0.86		
Bearing type	: Drive end 6203 ZZ Non drive end 6202 ZZ	Foundation loads		
Sealing	: Without Without Bearing Seal Bearing Seal	Max. traction : 17 kgf		
		Max. compression : 32 kgf		
Lubrication interval	: - -			
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	17/05/2022		Page 1 / 2	Revision

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Single-Phase

Product code : 14459510

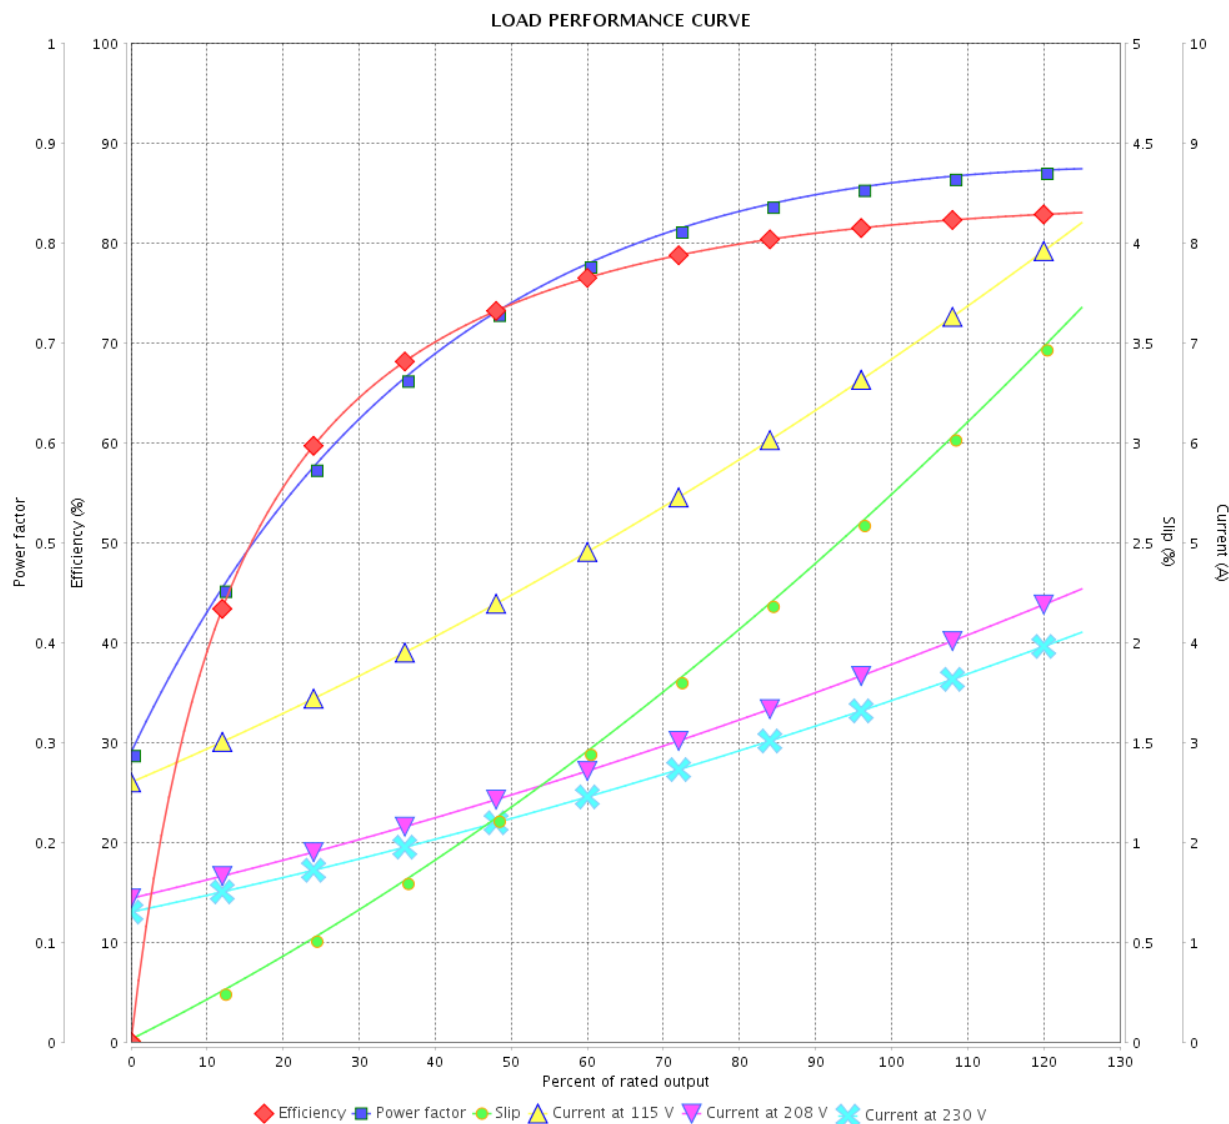

Performance : 115/208-230 V 60 Hz 4P

Rated current : 6.80/3.76-3.40 A
 LRC : 8.0
 Rated torque : 0.311 kgfm
 Locked rotor torque : 260 %
 Breakdown torque : 250 %
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0041 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

