

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 In Line Extra Thrust NEMA Premium Efficiency Three-Phase Product code : 17182672

Frame	: 404/5LP	Locked rotor time	: 37s (cold) 21s (hot)
Output	: 100 HP (75 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 88.1 A	Protection degree	: IP55
L. R. Amperes	: 573 A	Cooling method	: IC411 - TEFC
LRC	: 6.5x(Code G)	Mounting	: W-6
No load current	: 20.0 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 3550 rpm	Noise level ²	: 85.0 dB(A)
Slip	: 1.39 %	Starting method	: Direct On Line
Rated torque	: 20.4 kgfm	Approx. weight ³	: 547 kg
Locked rotor torque	: 250 %		
Breakdown torque	: 280 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.5561 kgm ²		
Design	: B		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	93.6	95.0	95.0	Max. traction	: 0 kgf
Power Factor	0.00	0.85	0.89	0.90	Max. compression	: 0 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6314 C3	7311BECB
Sealing	:	Oil Seal	Lip Seal
Lubrication interval	:	1802 h	1621 h
Lubricant amount	:	27 g	18 g
Lubricant type	:	Mobil Polyrex EM	

Notes
IN LINE EXTRA THRUST
NEMA PREMIUM EFFICIENCY

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 1 / 2 Revision		
Checked by				
Date	20/07/2026			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 In Line Extra Thrust NEMA
Premium Efficiency Three-Phase

Product code : 17182672

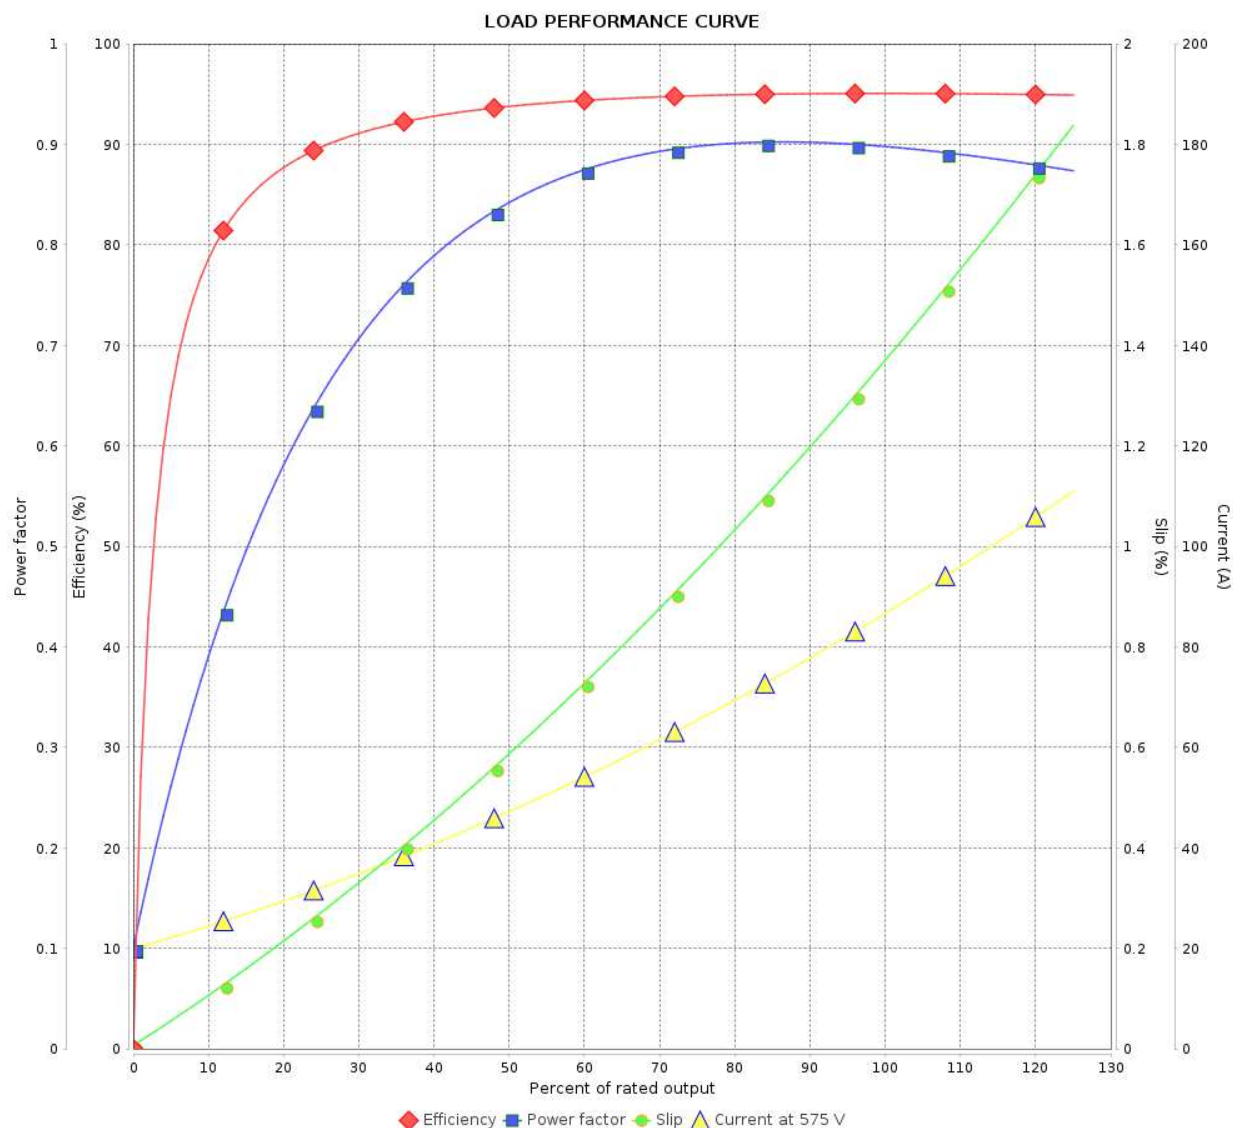

Performance : 575 V 60 Hz 2P

Rated current : 88.1 A
LRC : 6.5
Rated torque : 20.4 kgfm
Locked rotor torque : 250 %
Breakdown torque : 280 %
Rated speed : 3550 rpm

Moment of inertia (J) : 0.5561 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 2	Revision
Checked by					
Date	20/07/2026				

