

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Premium Efficiency (DOE) Jet
Pump - Forma J

Frame	: W56J	Locked rotor time	: 17 s (hot) 31 s (cold)
Output	: 0.33 HP (0.25 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 115/208-230 V	Altitude	: 3280 ft
Rated current	: 3.16/1.90-1.58 A	Protection degree	: IP55
L. R. Amperes	: 28.4/17.1-14.2 A	Cooling method	: IC411 - TEFC
LRC	: 9.0	Mounting	: F-1/B34R(D)
No load current	: 1.00/0.431-0.500 A	Rotation ¹	: Counter clockwise
Rated speed	: 3510 rpm	Noise level ²	: 66.0 dB(A)
Slip	: 2.50 %	Vibration class	: A
Rated torque	: 0.485 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 290 %	Approx. weight ³	: 24.3 lb
Pull up torque	: 245 %	Painting plan	: 207N
Breakdown torque	: 320 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F	Design	: N
Service factor	: 1.15		
Moment of inertia (J)	: 0.0285 sq.ft.lb		

Output	50%	75%	100%	Load type	: -
Efficiency (%)	55.0	68.0	72.0	Load torque	: -
Power Factor	0.94	0.94	0.95	Load inertia (J=GD ² /4)	: -
	Drive end	Non drive end		Foundation loads	
Bearing type #1	6203-2RS	6202-2RS		Max. traction	: -
Bearing type #2	-	-		Max. compression	: -
Lubrication interval	-	-			
Lubricant amount #1	-	-			
Lubricant amount #2	-	-			
Lubricant type	MOBIL POLYREX EM				

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq			1866238737	
Checked by	AUTOMATICO			Page	Rev.
Date	26/06/2026			1 / 2	0

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Premium Efficiency (DOE) Jet
Pump - Forma J


Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.	These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.
---	---

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq			1866238737	
Checked by	AUTOMATICO			Page	Rev.
Date	26/06/2026			2 / 2	0

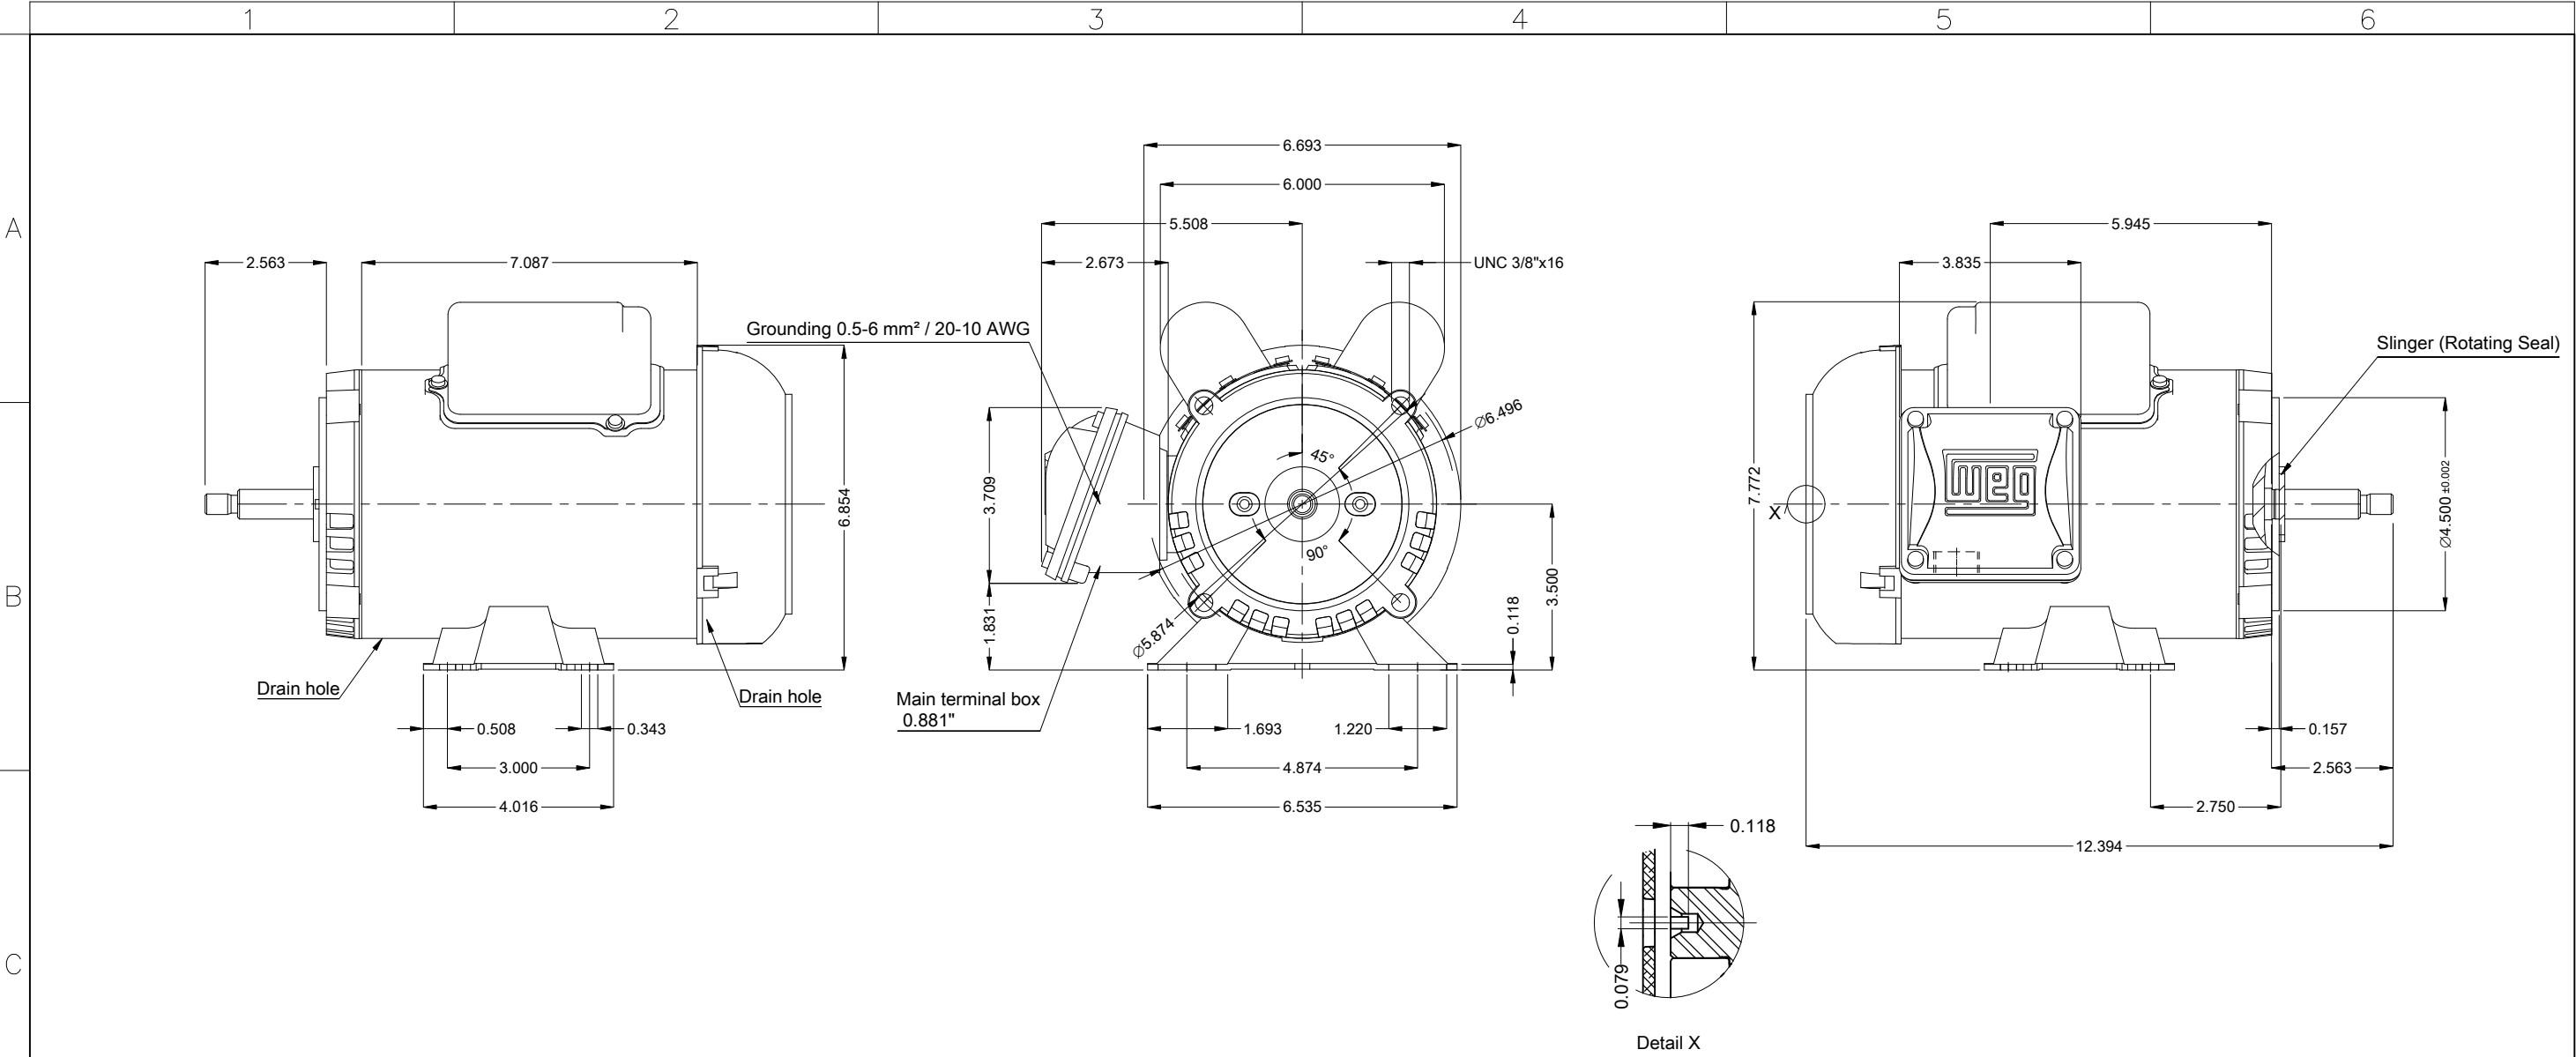

D												
			0.33 HP 02 Poles 60 Hz									
			V.J. PAMENSKY CANADA INC.									
			Scale 2 : 7									
			PIRWBUSER									
			00									
			ECM LOC SUMMARY OF MODIFICATIONS EXECUTED CHECKED RELEASED DATE VER									
			EXECUTED PIRWBUSER SINGLE PH. MOTOR ROLLED STEEL JET PUMP THREADED PRELIMINARY									
			CHECKED FRAME W56J IP55 TEFC									
			RELEASED									
E			PREVIEW									
			WDD 00									
			SHEET 1 / 1									
			WEG									