

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase Product code : 13406058

Frame	: 143HP	Locked rotor time	: 32s (cold) 18s (hot)
Output	: 1 HP (0.75 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 1.18 A	Protection degree	: IP55
L. R. Amperes	: 10.1 A	Cooling method	: IC411 - TEFC
LRC	: 8.6x(Code M)	Mounting	: W-6
No load current	: 0.752 A	Rotation <sup>1</sup>	: Both (CW and CCW)
Rated speed	: 1760 rpm	Noise level <sup>2</sup>	: 51.0 dB(A)
Slip	: 2.22 %	Starting method	: Direct On Line
Rated torque	: 0.412 kgfm	Approx. weight <sup>3</sup>	: 23.8 kg
Locked rotor torque	: 290 %		
Breakdown torque	: 350 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.0049 kgm <sup>2</sup>		
Design	: B		

Output	50%	75%	100%	Foundation loads
Efficiency (%)	80.0	84.0	85.5	Max. traction
Power Factor	0.55	0.68	0.75	Max. compression

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
15.9	12.8	12.5	10.1	7.0	5.8	4.3

	<u>Drive end</u>	<u>Non drive end</u>
Bearing type	: 6307 ZZ	: 6204 ZZ
Sealing	: V'Ring	: V'Ring
Lubrication interval	: -	: -
Lubricant amount	: -	: -
Lubricant type	: Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	26/10/2024		Page 1 / 2	Revision

# LOAD PERFORMANCE CURVE

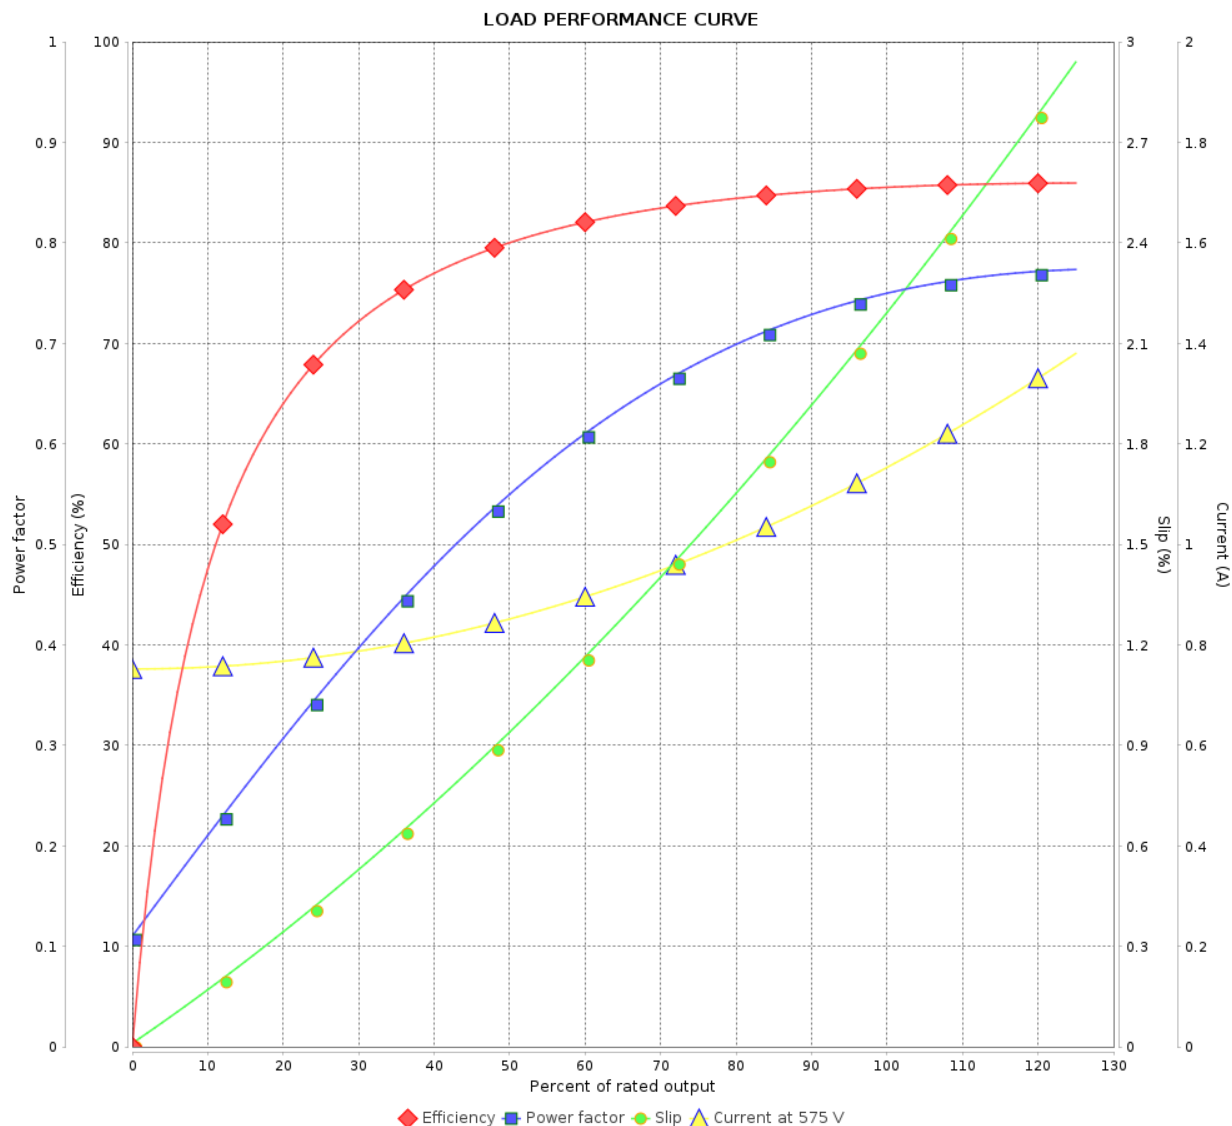
## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium  
Efficiency Three-Phase

Product code : 13406058


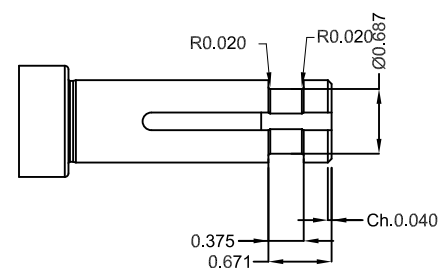
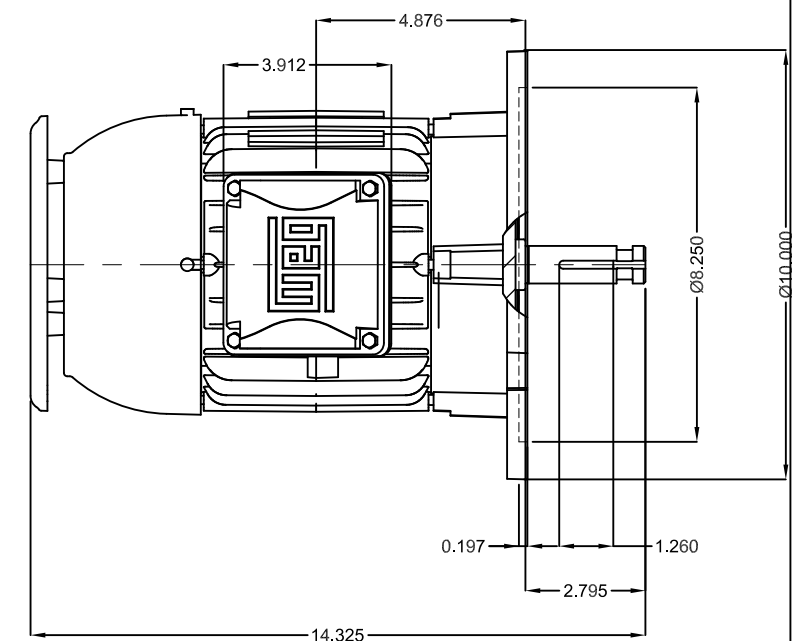
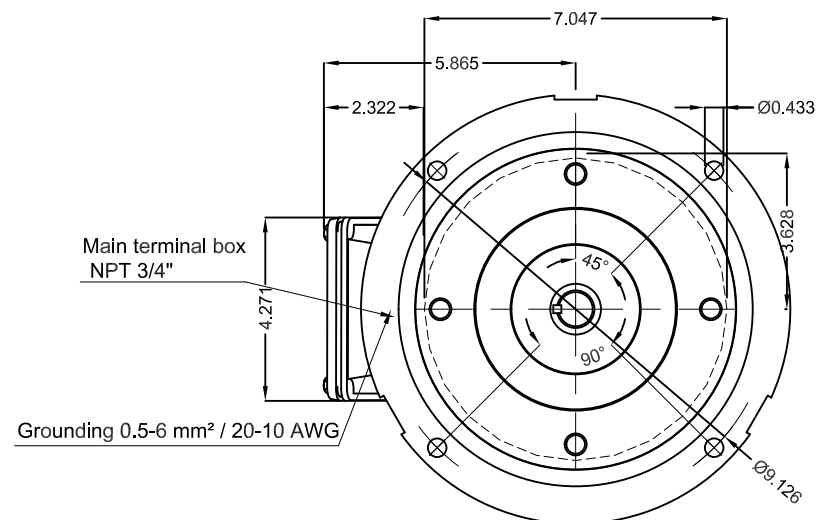
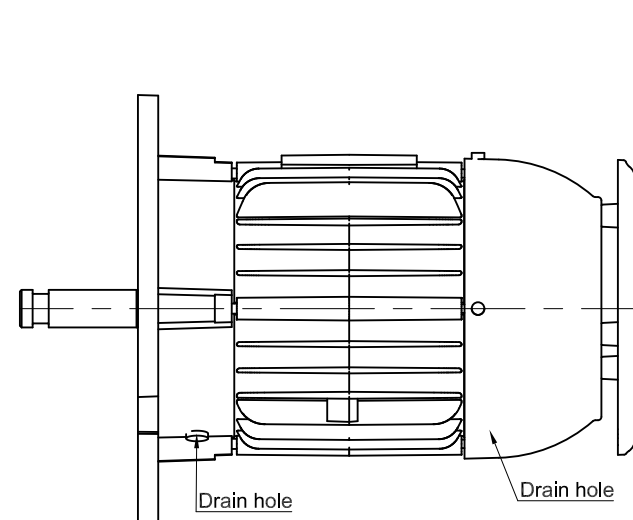


Performance : 575 V 60 Hz 4P



Rated current : 1.18 A  
LRC : 8.6  
Rated torque : 0.412 kgfm  
Locked rotor torque : 290 %  
Breakdown torque : 350 %  
Rated speed : 1760 rpm

Moment of inertia (J) : 0.0049 kgm<sup>2</sup>  
Duty cycle : Cont.(S1)  
Insulation class : F  
Service factor : 1.25  
Temperature rise : 80 K  
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					



Color RAL 5009
Painting plan 207A
Mounting NEMA W-6
Mounting V1

1 HP 04 Poles 60 Hz										A
						HYBRISUSER				00
ECM		LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR W22 P. BASE NEMA PREM. EFF. FRAME 143HP IP55 TEFC				PREVIEW WDD   00			
CHECKED										
RELEASED										
REL. DATE										
							SHEET		/	