

# DATASHEET

## Contactors



### Main Features

Reference	: CWB
Product code	: 13543410
Rated current Ie AC-3 (Ue ≤ 440 V)	: 40 A
Main contacts (power)	: 3 NO
Auxiliary contacts	: 1 NO + 1 NC
Control voltage	: 24V 50/60Hz
Type of terminal	: Screw

### Basic data

Rated utilization voltage Ue

- IEC / UL : 1000 V / 600 V

Isolation voltage Ui (pollution degree 3)

- IEC / UL : 1000 V / 600 V

Rated impulse withstand voltage Uimp

- Frequency limits [1] : 6 kV

- Mechanical lifespan

AC-operated contactor : 6 million

DC-operated contactor : 6 million

Electrical lifespan - Ie AC3 : 1.6 million

Number of coil terminals (AC Coil)

AC coil contactors : 2

- DC coil contactors : 2

Resistance to vibration (IEC 60068-2-6)

opened contactor : 4 g

closed contactor : 4 g

Resistance to mechanical shock (½ sinusoid = 11ms)

opened contactor : 10 g

closed contactor : 15 g

Installation

Degree of protection (IEC 60529) : DIN 35 mm (EN 50022)

Main circuit

: IP10

Control circuit

: IP20

### Alternating current - control circuit

Isolation voltage Ui (pollution degree 3) : 1000 V / 600 V

- IEC / UL

Standard voltages for 50/60 Hz : 12...550 V

Command circuit operation limits

- control circuit 60 Hz : 0,5...0,8xUs

- pick up : 0,2...0,6xUs

- drop out : 0,5...0,8xUs

- control circuit 50 Hz : 0,2...0,6xUs

- pick up : 0,5...0,8xUs

- drop out : 0,2...0,6xUs

- Average coil consumption

- operating at 60 Hz : 14...21 VA

- closed magnetic circuit : 0,28

- power factor ( $\cos \varphi$ ) : 4...5,5 W

- Thermal power dissipated : 148...222 VA

- operating at 50 Hz : 22...32 VA

- closed magnetic circuit : 0,25

- power factor ( $\cos \varphi$ ) : 5,5...7,8 W

- Thermal power dissipated : 162...242 VA

- closing the magnetic circuit

- opening the magnetic circuit

: 10...15 ms

: 8...12 ms

### Direct current - command circuit

- IEC / UL

Standard voltages

Command circuit operation limits

- pick up

- drop out

Average consumption

- closed magnetic circuit

- closing the magnetic circuit

Thermal power dissipated

Average time of operation

- closing the NO contacts

- opening the NO contacts


### Main contacts (power)

Rated utilization current Ie

- AC-3 (Ue ≤ 440 V) : 40 A

# DATASHEET

## Contactors



- AC-4 (Ue ≤ 440 V)	: 18,5 A
- AC-1 ( $\theta \leq 55^\circ\text{C}$ , Ue ≤ 690 V)	: 60 A
Rated utilization voltage Ue	: 1000 V / 600 V
- IEC / UL	: 3 NO
Number of main contacts	: 550 A
Establishment capacity (IEC 60947)	: 550 A
Breaking capacity (IEC/EN 60947)	: 480 A
- Ue≤400V	: 350 A
- Ue=500V	
- Ue=690V	
Temporary permissible current (without previously current conduction during 15 min at $\theta \leq 40^\circ\text{C}$ )	
- 1 sec	: 720 A
- 10 sec	: 320 A
- 10 sec	: 320 A
- 1 min	:
- 10 min	: 00013
Protection against short circuit of the contacts main fuse (gL/gG)	
- @600V - UL/CSA	: 5 kA
- type 1 coordination	: 80 A
- type 2 coordination	: Not available
Average power dissipated per pole	
AC-1 ( $\theta \leq 55^\circ\text{C}$ , Ue ≤ 690 V)	: 6 W
AC-3 (Ue ≤ 440 V)	: 3 W
<b>Utilization category AC-3</b>	
Rated current Ie ( $\theta \leq 55^\circ\text{C}$ )	
- Ue ≤ 440V	: 40 A
- Ue ≤ 500V	: 35 A
- Ue ≤ 690V	: 32 A
Maximum percentage (600 ops./h)	: 100 %

Orientative values of power (IEC)-three-phase induction motors (50/60 Hz)-IV poles-1800 rpm

Voltage	kW	cv or HP
220 / 240 V	11 kW	15 cv
380 / 400 V	18,5 kW	25 HP
415 / 440 V	22 kW	29 cv
500 V	22 kW	29 cv
660 / 690 V	30 kW	40 cv

Orientative values of power (UL)

Voltage	1 Phase	3 Phase
120 V	3	Not available
200 V	Not applicable	10
208 V	Not available	Not available
240 V	7.5	10
480 V	Not available	30
600 V	Not available	30

### Utilization category AC-4

Rated current Ie ( $\theta \leq 55^\circ\text{C}$ )

- Ue ≤ 440V	: 18,5 A
- Ue ≤ 500V	: 17,5 A
- Ue ≤ 690V	: 14 A

Orientative values of power (IEC)-three-phase induction motors (50/60 Hz)-IV poles-1800 rpm

Voltage	kW	cv or HP
220 / 240 V	4.5 kW	6 HP
380 / 400 V	9.2 kW	12.3 HP
415 / 440 V	11 kW	14,7 HP
500 V	11 kW	14.7 HP
660 / 690 V	12.5 kW	16.8 HP

### Utilization category AC-1 (3 P/NA)

Maximum percentage (600 ops./h)

: 1

Maximum power operation $\theta \leq 55^\circ\text{C}$ (three resistors)	
Voltage	Power
220 / 240 V	22.5 kW
380 / 400 V	39.5 kW
415 / 440 V	45.5 kW
500 V	52 kW
660 / 690 V	66 kW

### Auxiliary contacts

Standards compliance

: IEC 600947-5-1

Insulation voltage Ui

: 1000 V / 600 V

# DATASHEET

## Contactors



Rated utilization voltage Ue

- IEC / UL : 690 V / 690 V

Conventional thermal current Ith ( $\theta \leq 55^\circ\text{C}$ ) : 10 A

Rated current le - IEC 60947-5-1/AC-15

- 220 / 240 V : 6 A

- 380 / 440 V : 4 A

- 500 V : 2,5 A

- 660 / 690 V : 1,5 A

Rated current le - IEC 60947-5-1/DC-13

- 24 V : 4 A

- 48 V : 2 A

- 110 V : 0,7 A

- 220 V : 0,3 A

- 440 V : 0,15 A

Establishment capacity - (AC-15 and Ue  $\leq$  690V 50/60Hz) : 10 x le

Interruption capacity - (AC-15 and Ue  $\leq$  400V 50/60Hz) : 1 x le

Protection against short circuit of the contacts main fuse (gL/gG) : 10 A

Control circuit reliability : 17/5 V/mA

Electrical lifespan : 1 Million

Mechanical lifespan : 6 million

Non-overlapping time between NO and NC contacts : 1,5 ms

Impedance per pole : 2,5 m $\Omega$

### Connection

Main contacts

Type of the screw : M6 internal hexagonal

Section of the conductors

Type of the conductor	Section (IEC)	Section (UL)
Rigid cable	1 x Not available	1 x
	2 x Not available	2 x
Flexible cable without terminal	1 x Not available	1 x
	2 x Not available	2 x
Flexible cable with terminal	1 x Not contain	1 x
	2 x Not contain	2 x

Tightening torque (IEC/UL) : 5 Nm / 45 lb.in

Control circuit

Type of the screw : M3,5 Flat/Phillips

Section of the conductors

Type of the conductor	Section (IEC)	Section (UL)
Rigid cable	1 x 1...4 mm <sup>2</sup>	1 x
	2 x 1...4 mm <sup>2</sup>	2 x
Flexible cable without terminal	1 x 1...4 mm <sup>2</sup>	1 x
	2 x 1...4 mm <sup>2</sup>	2 x
Flexible cable with terminal	1 x 1...4 mm <sup>2</sup>	1 x
	2 x 1...2,5 mm <sup>2</sup>	2 x

Tightening torque (IEC/UL) : 1 Nm / 8.8 lb.in

### Direct current application

Utilization category DC-1 (L/R  $\leq$  1 ms)


Voltage	Rated utilization current (le)			
	Pole(s) in series			
1	2	3	4	
Ue $\leq$ 24V	60 A	60 A	60 A	Not available
Ue $\leq$ 48V	60 A	60 A	60 A	Not available
Ue $\leq$ 60V	60 A	60 A	60 A	Not available
Ue $\leq$ 125V	15 A	60 A	60 A	Not available
Ue $\leq$ 220V	2 A	10 A	50 A	Not available
Ue $\leq$ 440V	1 A	2 A	10 A	Not available
Ue $\leq$ 600V	Not available	1 A	2 A	Not available

Utilization category DC-3 (L/R  $\leq$  2.5 ms)

Voltage	Rated utilization current (le)			
	Pole(s) in series			
1	2	3	4	
Ue $\leq$ 24V	55 A	55 A	55 A	Not available
Ue $\leq$ 48V	55 A	55 A	55 A	Not available
Ue $\leq$ 60V	55 A	55 A	55 A	Not available
Ue $\leq$ 125V	5 A	44 A	55 A	Not available
Ue $\leq$ 220V	1 A	5 A	45 A	Not available
Ue $\leq$ 440V	Not available	1 A	5 A	Not available
Ue $\leq$ 600V	Not available	Not available	1 A	Not available

# DATASHEET

## Contactors



Operation category DC-5 (L/R ≤ 15ms)

Voltage	Rated utilization current (Ie)			
	Pole(s) in series			
	1	2	3	4
Ue ≤ 24V	55 A	55 A	55 A	Not available
Ue ≤ 48V	55 A	55 A	55 A	Not available
Ue ≤ 60V	55 A	55 A	55 A	Not available
Ue ≤ 125V	5 A	44 A	55 A	Not available
Ue ≤ 220V	Not available	4 A	41 A	Not available
Ue ≤ 440V	Not available	Not available	Not available	Not available
Ue ≤ 600V	Not available	Not available	Not available	Not available

### Ambient temperature

Operation : -25 °C ... +55 °C  
 Storage : -55 °C ... +80 °C

Maximum altitude with no change of rated values [2] : 3000 m

### Dimensions

Height : 115 mm (4.53 in)  
 Width : 54 mm (2.13 in)  
 Depth : 120.7 mm (4.75 in)  
 Weight : 0.91 kg

### Standards

IEC 60947-1

UL 508

### Certifications

CE, UL and EAC






### Notes

1) Values above 60 Hz should have current reduction;

2) For altitudes of 3000 to 4000 m ( $0.90 \times 0.80 \times Ie$  and  $Ui$ ) and from 4000 to 5000 m ( $0.80 \times 0.75 \times Ie$  and  $Ui$ ).

1 2 3 4 5 6 7 8 9 10

A  
B  
C  
D  
E  
F  
G  
H

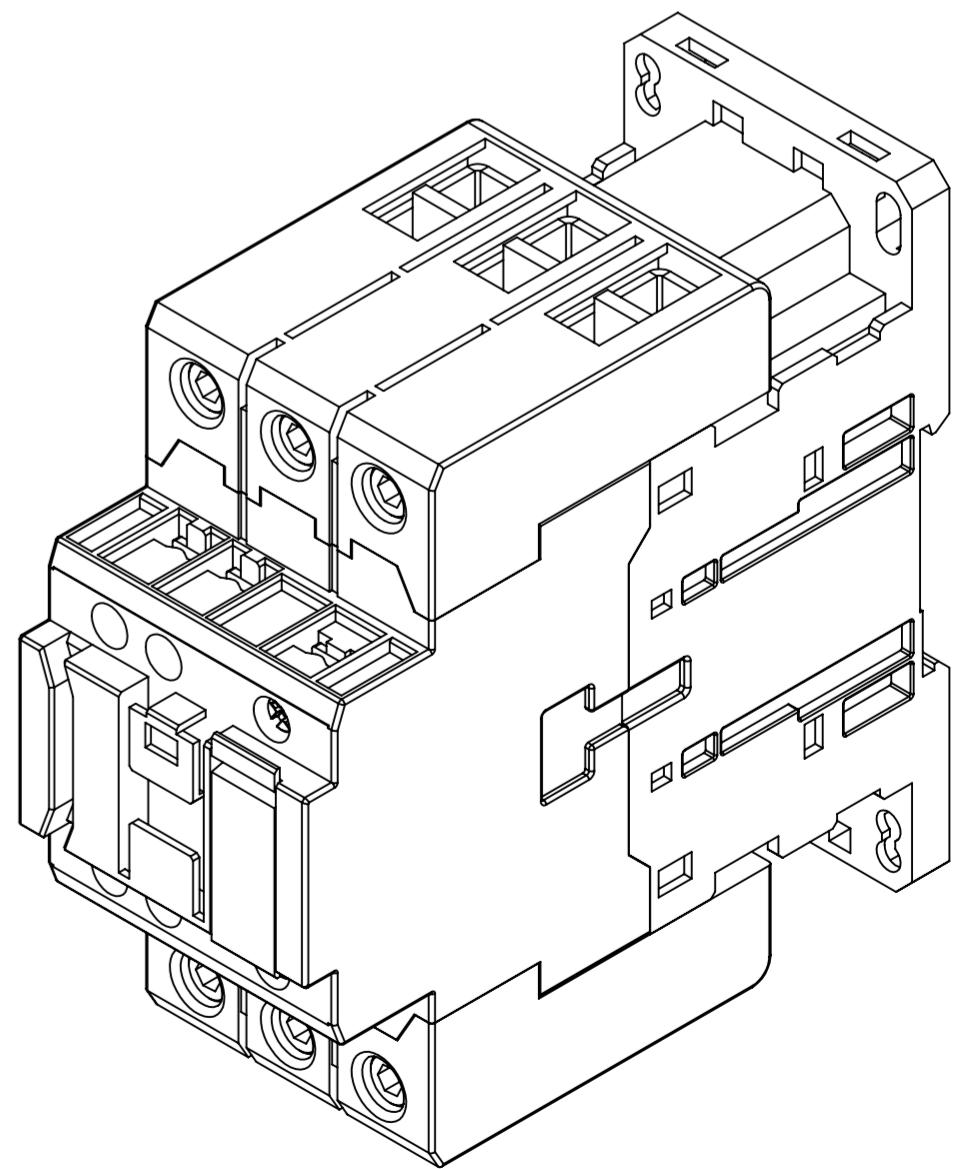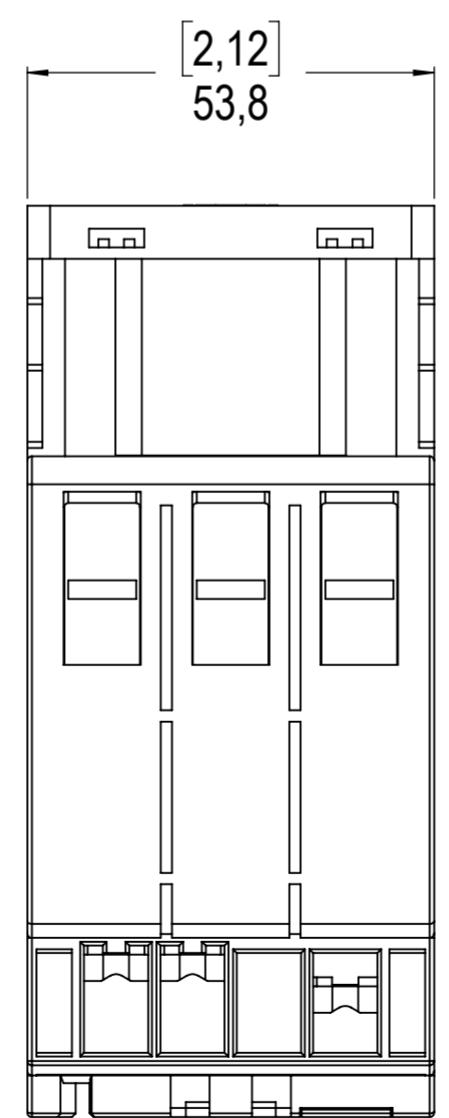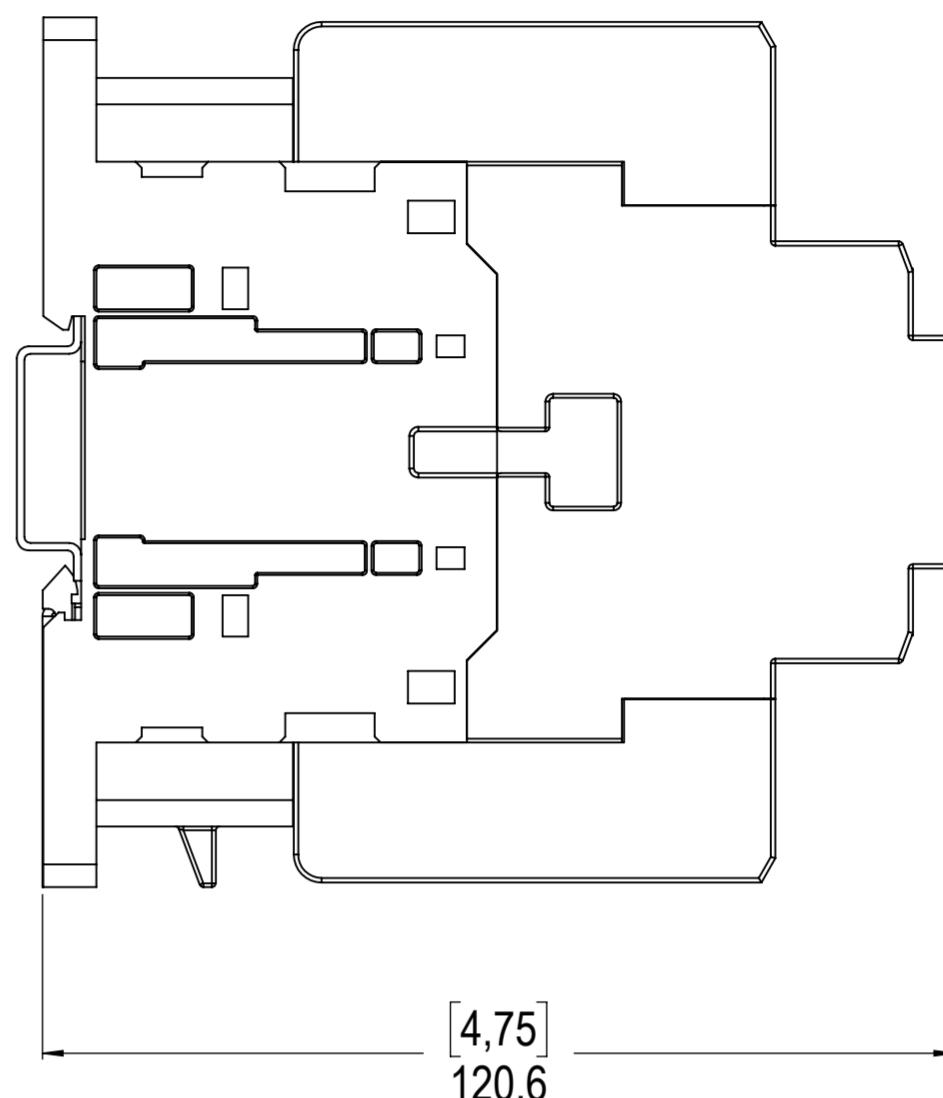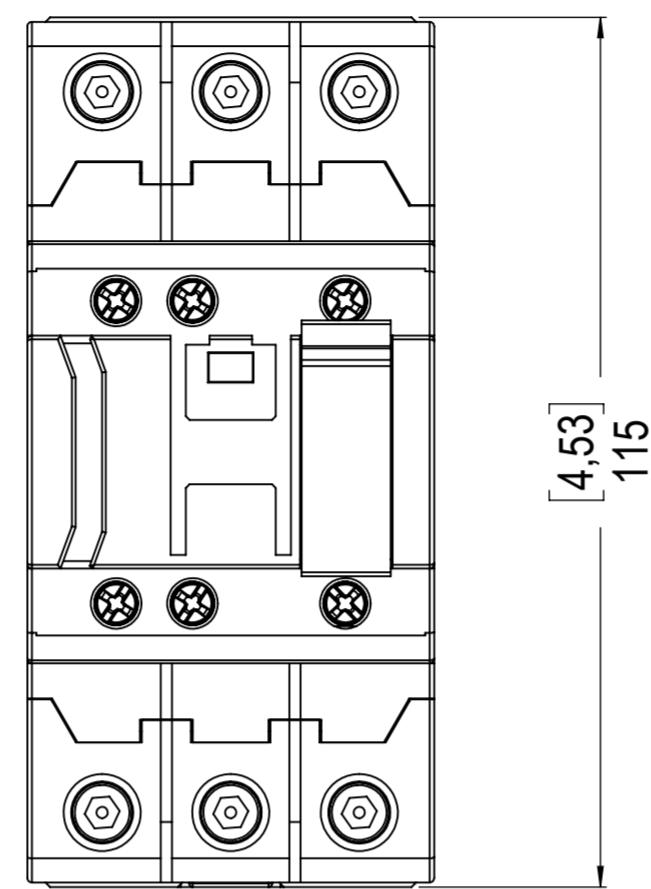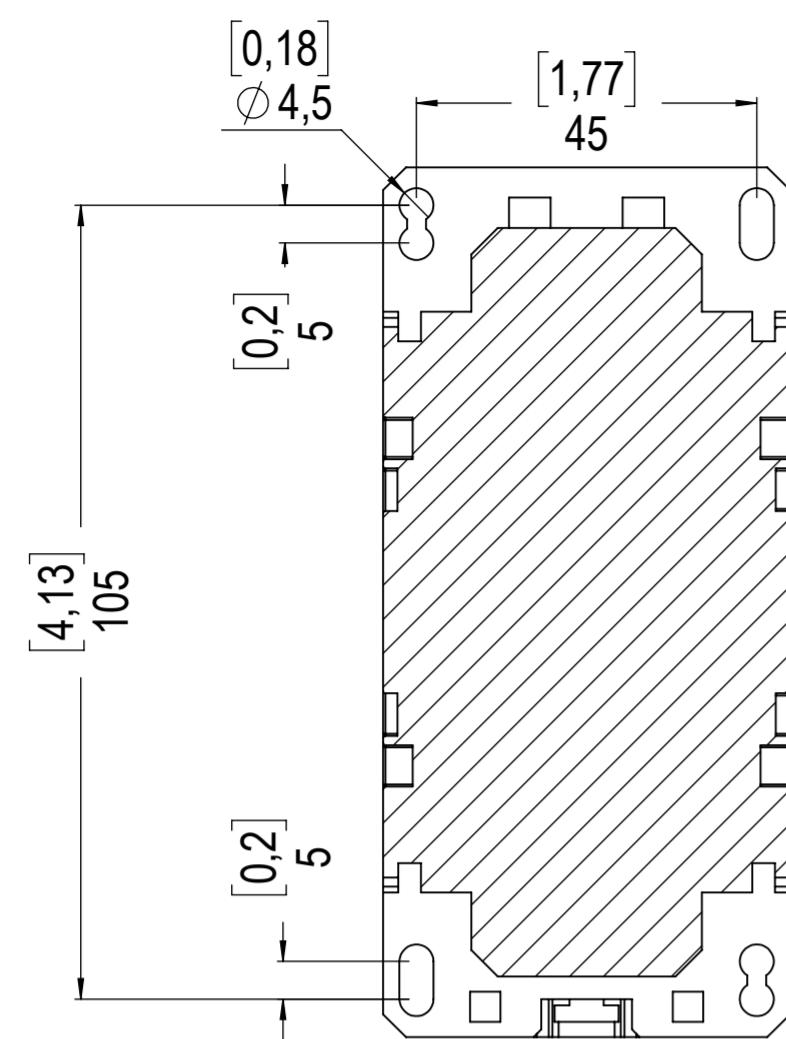

CWB40...80

06/10/2017

1:1

mm [inches]

weg