

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 P Base NEMA Premium Efficiency Three-Phase Product code : 13435588

|                       |                         |                             |                        |
|-----------------------|-------------------------|-----------------------------|------------------------|
| Frame                 | : 404/5HPH              | Locked rotor time           | : 23s (cold) 13s (hot) |
| Output                | : 100 HP (75 kW)        | Temperature rise            | : 80 K                 |
| Poles                 | : 4                     | Duty cycle                  | : Cont.(S1)            |
| Frequency             | : 60 Hz                 | Ambient temperature         | : -20°C to +40°C       |
| Rated voltage         | : 575 V                 | Altitude                    | : 1000 m.a.s.l.        |
| Rated current         | : 90.4 A                | Protection degree           | : IP55                 |
| L. R. Amperes         | : 660 A                 | Cooling method              | : IC411 - TEFC         |
| LRC                   | : 7.3x(Code H)          | Mounting                    | : W-6                  |
| No load current       | : 30.4 A                | Rotation <sup>1</sup>       | : Both (CW and CCW)    |
| Rated speed           | : 1780 rpm              | Noise level <sup>2</sup>    | : 68.0 dB(A)           |
| Slip                  | : 1.11 %                | Starting method             | : Direct On Line       |
| Rated torque          | : 40.8 kgfm             | Approx. weight <sup>3</sup> | : 531 kg               |
| Locked rotor torque   | : 240 %                 |                             |                        |
| Breakdown torque      | : 260 %                 |                             |                        |
| Insulation class      | : F                     |                             |                        |
| Service factor        | : 1.25                  |                             |                        |
| Moment of inertia (J) | : 1.26 kgm <sup>2</sup> |                             |                        |
| Design                | : B                     |                             |                        |

|                |       |      |      |      |                  |
|----------------|-------|------|------|------|------------------|
| Output         | 25%   | 50%  | 75%  | 100% | Foundation loads |
| Efficiency (%) | 0.000 | 95.0 | 95.0 | 95.4 | Max. traction    |
| Power Factor   | 0.00  | 0.77 | 0.84 | 0.87 | Max. compression |

Losses at normative operating points (speed;torque), in percentage of rated output power

| P1 (0,9;1,0) | P2 (0,5;1,0) | P3 (0,25;1,0) | P4 (0,9;0,5) | P5 (0,5;0,5) | P6 (0,5;0,25) | P7 (0,25;0,25) |
|--------------|--------------|---------------|--------------|--------------|---------------|----------------|
| 4.7          | 3.8          | 3.7           | 2.2          | 1.5          | 0.9           | 0.6            |

|                      | Drive end        | Non drive end |
|----------------------|------------------|---------------|
| Bearing type         | : 6316 C3        | 6314 C3       |
| Sealing              | : Lip Seal       | Lip Seal      |
| Lubrication interval | : 5000 h         | 6000 h        |
| Lubricant amount     | : 34 g           | 27 g          |
| Lubricant type       | Mobil Polyrex EM |               |

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

| Rev.         | Changes Summary | Performed | Checked | Date     |
|--------------|-----------------|-----------|---------|----------|
|              |                 |           |         |          |
| Performed by |                 |           |         |          |
| Checked by   |                 |           |         |          |
| Date         | 26/10/2024      |           |         |          |
|              |                 |           | Page    | Revision |
|              |                 |           | 1 / 2   |          |

# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W22 P Base NEMA Premium  
Efficiency Three-Phase

Product code : 13435588

LOAD PERFORMANCE CURVE

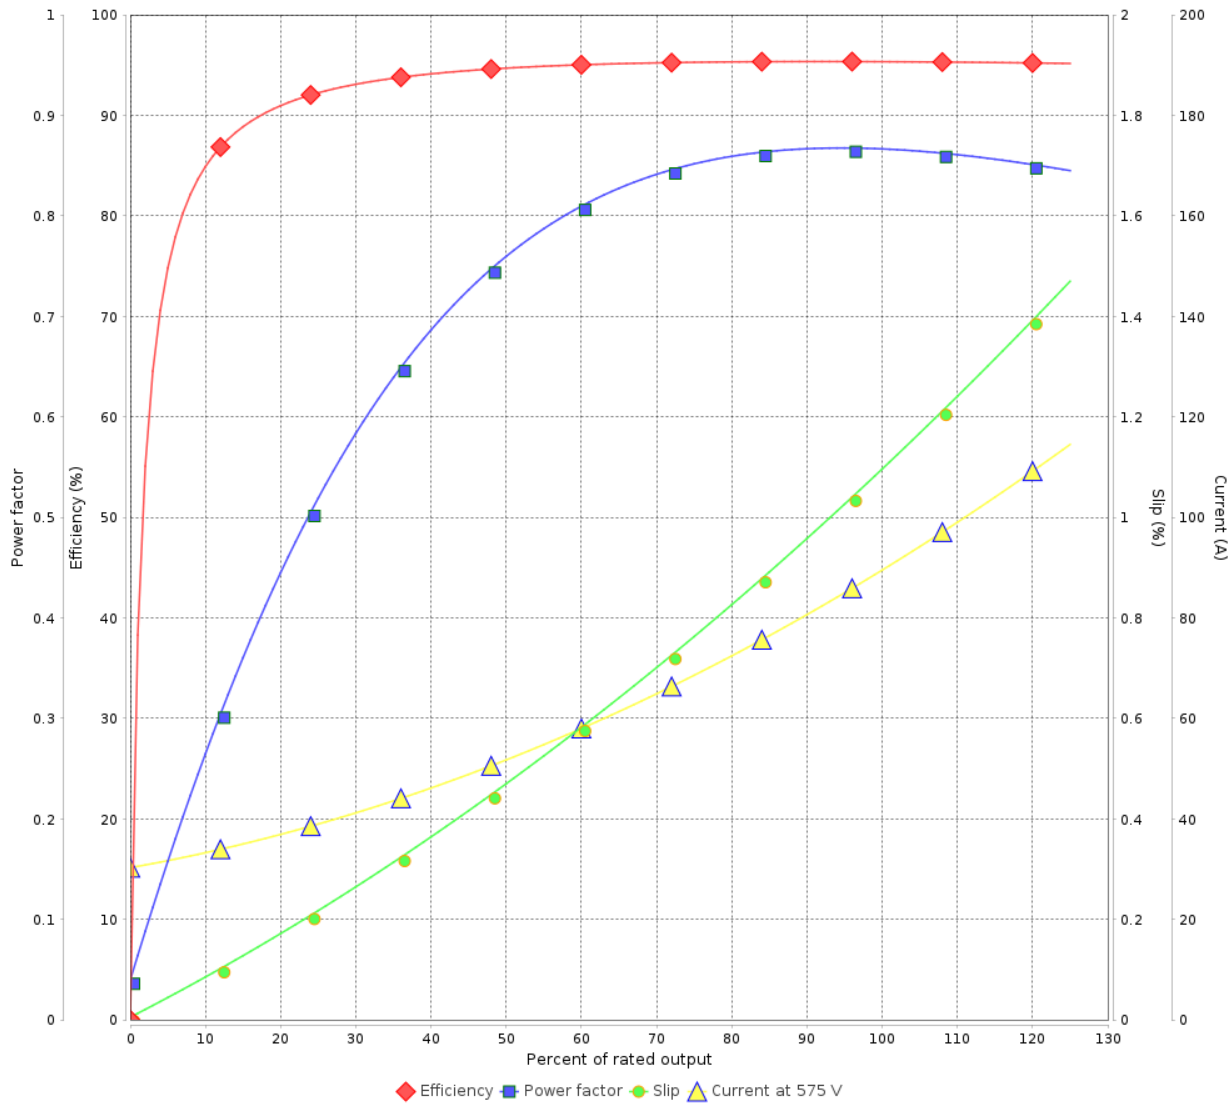

Performance : 575 V 60 Hz 4P

|                     |             |                       |                         |
|---------------------|-------------|-----------------------|-------------------------|
| Rated current       | : 90.4 A    | Moment of inertia (J) | : 1.26 kgm <sup>2</sup> |
| LRC                 | : 7.3       | Duty cycle            | : Cont.(S1)             |
| Rated torque        | : 40.8 kgfm | Insulation class      | : F                     |
| Locked rotor torque | : 240 %     | Service factor        | : 1.25                  |
| Breakdown torque    | : 260 %     | Temperature rise      | : 80 K                  |
| Rated speed         | : 1780 rpm  | Design                | : B                     |

| Rev.         | Changes Summary |  | Performed | Checked       | Date     |
|--------------|-----------------|--|-----------|---------------|----------|
|              |                 |  |           |               |          |
| Performed by |                 |  |           | Page<br>2 / 2 | Revision |
| Checked by   |                 |  |           |               |          |
| Date         | 26/10/2024      |  |           |               |          |

