

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Saw Arbor Motor Standard Efficiency Three-Phase      Product code : 10023134

Frame	: 90L/MS	Locked rotor time	: 10s (cold) 6s (hot)
Output	: 10 HP (7.5 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 208-230/460 V	Altitude	: 1000 m.a.s.l.
Rated current	: 32.5-29.4/14.7 A	Protection degree	: IP54
L. R. Amperes	: 276-250/125 A	Cooling method	: IC411 - TEFC
LRC	: 8.5	Mounting	: B3R(D)
No load current	: 18.0-16.3/8.13 A	Rotation <sup>1</sup>	: CCW
Rated speed	: 1715 rpm	Noise level <sup>2</sup>	: 55.0 dB(A)
Slip	: 4.72 %	Starting method	: Direct On Line
Rated torque	: 4.23 kgfm	Approx. weight <sup>3</sup>	: 82.5 kg
Locked rotor torque	: 459 %		
Breakdown torque	: 450 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0168 kgm <sup>2</sup>		
Design	: N		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	84.5	85.5	85.5	Max. traction	: 434 kgf
Power Factor	0.54	0.67	0.75	Max. compression	: 517 kgf

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6308 ZZ	6208 ZZ
Sealing	:	Without Bearing Seal	Without Bearing Seal
Lubrication interval	:	-	-
Lubricant amount	:	-	-
Lubricant type	:	Mobil Polyrex EM	

### Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by				
Date	26/10/2024			
		1 / 2		

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Saw Arbor Motor Standard  
Efficiency Three-Phase

Product code : 10023134

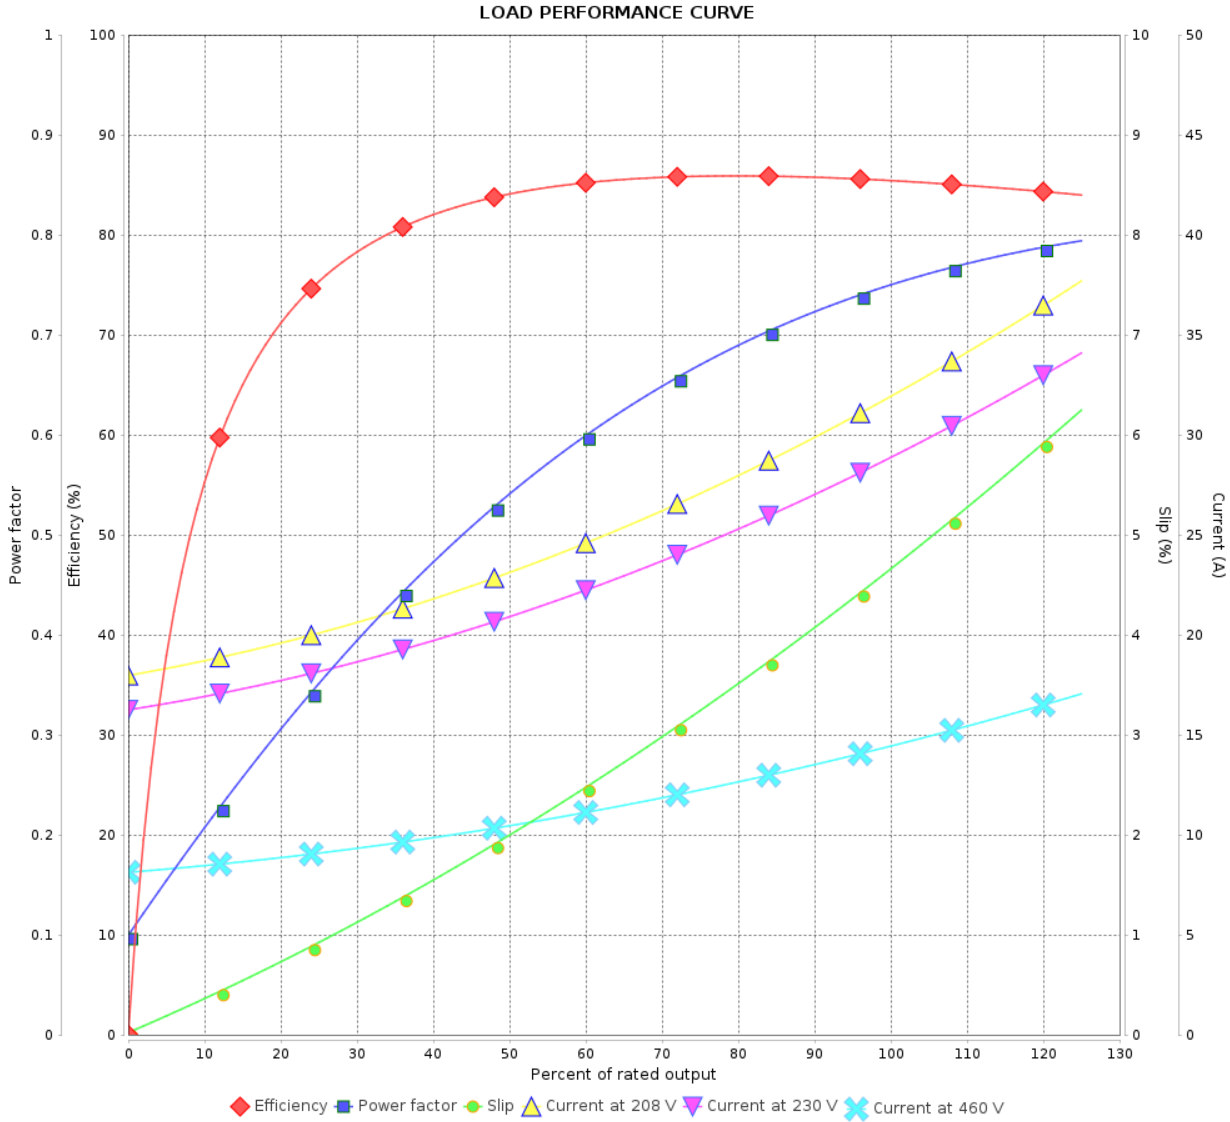

Performance : 208-230/460 V 60 Hz 4P

Rated current : 32.5-29.4/14.7 A  
 LRC : 8.5  
 Rated torque : 4.23 kgfm  
 Locked rotor torque : 459 %  
 Breakdown torque : 450 %  
 Rated speed : 1715 rpm

Moment of inertia (J) : 0.0168 kgm<sup>2</sup>  
 Duty cycle : S1  
 Insulation class : F  
 Service factor : 1.15  
 Temperature rise : 80 K  
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	26/10/2024			

