

# DATA SHEET

## Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEAO - Grain Dryer

Frame	: 213/5TZ	Cooling method	: IC418 - TEAO
Insulation class	: F	Minimum air speed over motor	: 20.1 m/s
Duty cycle	: S1	Mounting	: F-3/B3T
Ambient temperature	: -20 °C to +40 °C	Rotation <sup>1</sup>	: Both
Altitude	: 3280 ft	Starting method	: Direct On Line
Protection degree	: IP55	Approx. weight <sup>3</sup>	: 182 lb
		Moment of inertia (J)	: 0.0000 sq.ft.lb

Output	10 HP (7.5 kW)	15 HP (11 kW)	
Poles	2	2	
Frequency	60 Hz	60 Hz	
Rated voltage	230 V	230 V	
Rated current	38.2 A	55.6 A	
L. R. Amperes	409 A	406 A	
LRC	10.7	7.3	
No load current	9.00 A	9.00 A	
Rated speed	3550 rpm	3510 rpm	
Slip	1.39 %	2.50 %	
Rated torque	14.6 ft.lb	22.1 ft.lb	
Locked rotor torque	260 %	160 %	
Pull up torque	220 %	135 %	
Breakdown torque	440 %	290 %	
Service factor	1.00	1.00	
Temperature rise	80 K	105 K	
Noise level <sup>2</sup>	75.0 dB(A)	75.0 dB(A)	
Locked rotor time (hot)	8 s	6 s	
Locked rotor time (cold)	14 s	11 s	
Efficiency (%)	50%	82.2	86.0
	75%	86.4	88.0
	100%	88.0	88.0
Power Factor	50%	0.95	0.90
	75%	0.96	0.96
	100%	0.97	0.97

	Drive end	Non drive end	Foundation loads
Bearing type	6208-ZZ	6206-ZZ	Max. traction :-
Lubrication interval	-	-	Max. compression :-
Lubricant amount	-	-	Load type :-
Lubricant type	MOBIL POLYREX EM		Load torque :-
			Load inertia (J=GD <sup>2</sup> /4) :-

Notes  
See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.  
 (1) Looking the motor from the shaft end.  
 (2) Measured at 1m and with tolerance of +3dB(A).  
 (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Rev.	Checked	Date
Performed by	farazq			1850601337
Checked by	AUTOMATICO		Page	Rev.
Date	20/05/2026		1 / 2	0

# DATA SHEET

## Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEAO - Grain Dryer

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155°C


Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		


This revision replaces and cancel the previous one, which must be eliminated.  
(1) Looking the motor from the shaft end.  
(2) Measured at 1m and with tolerance of +3dB(A).  
(3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Rev.	Checked	Date
Performed by	farazq	1850601337		
Checked by	AUTOMATICO	Page	Rev.	
Date	20/05/2026	2 / 2	0	

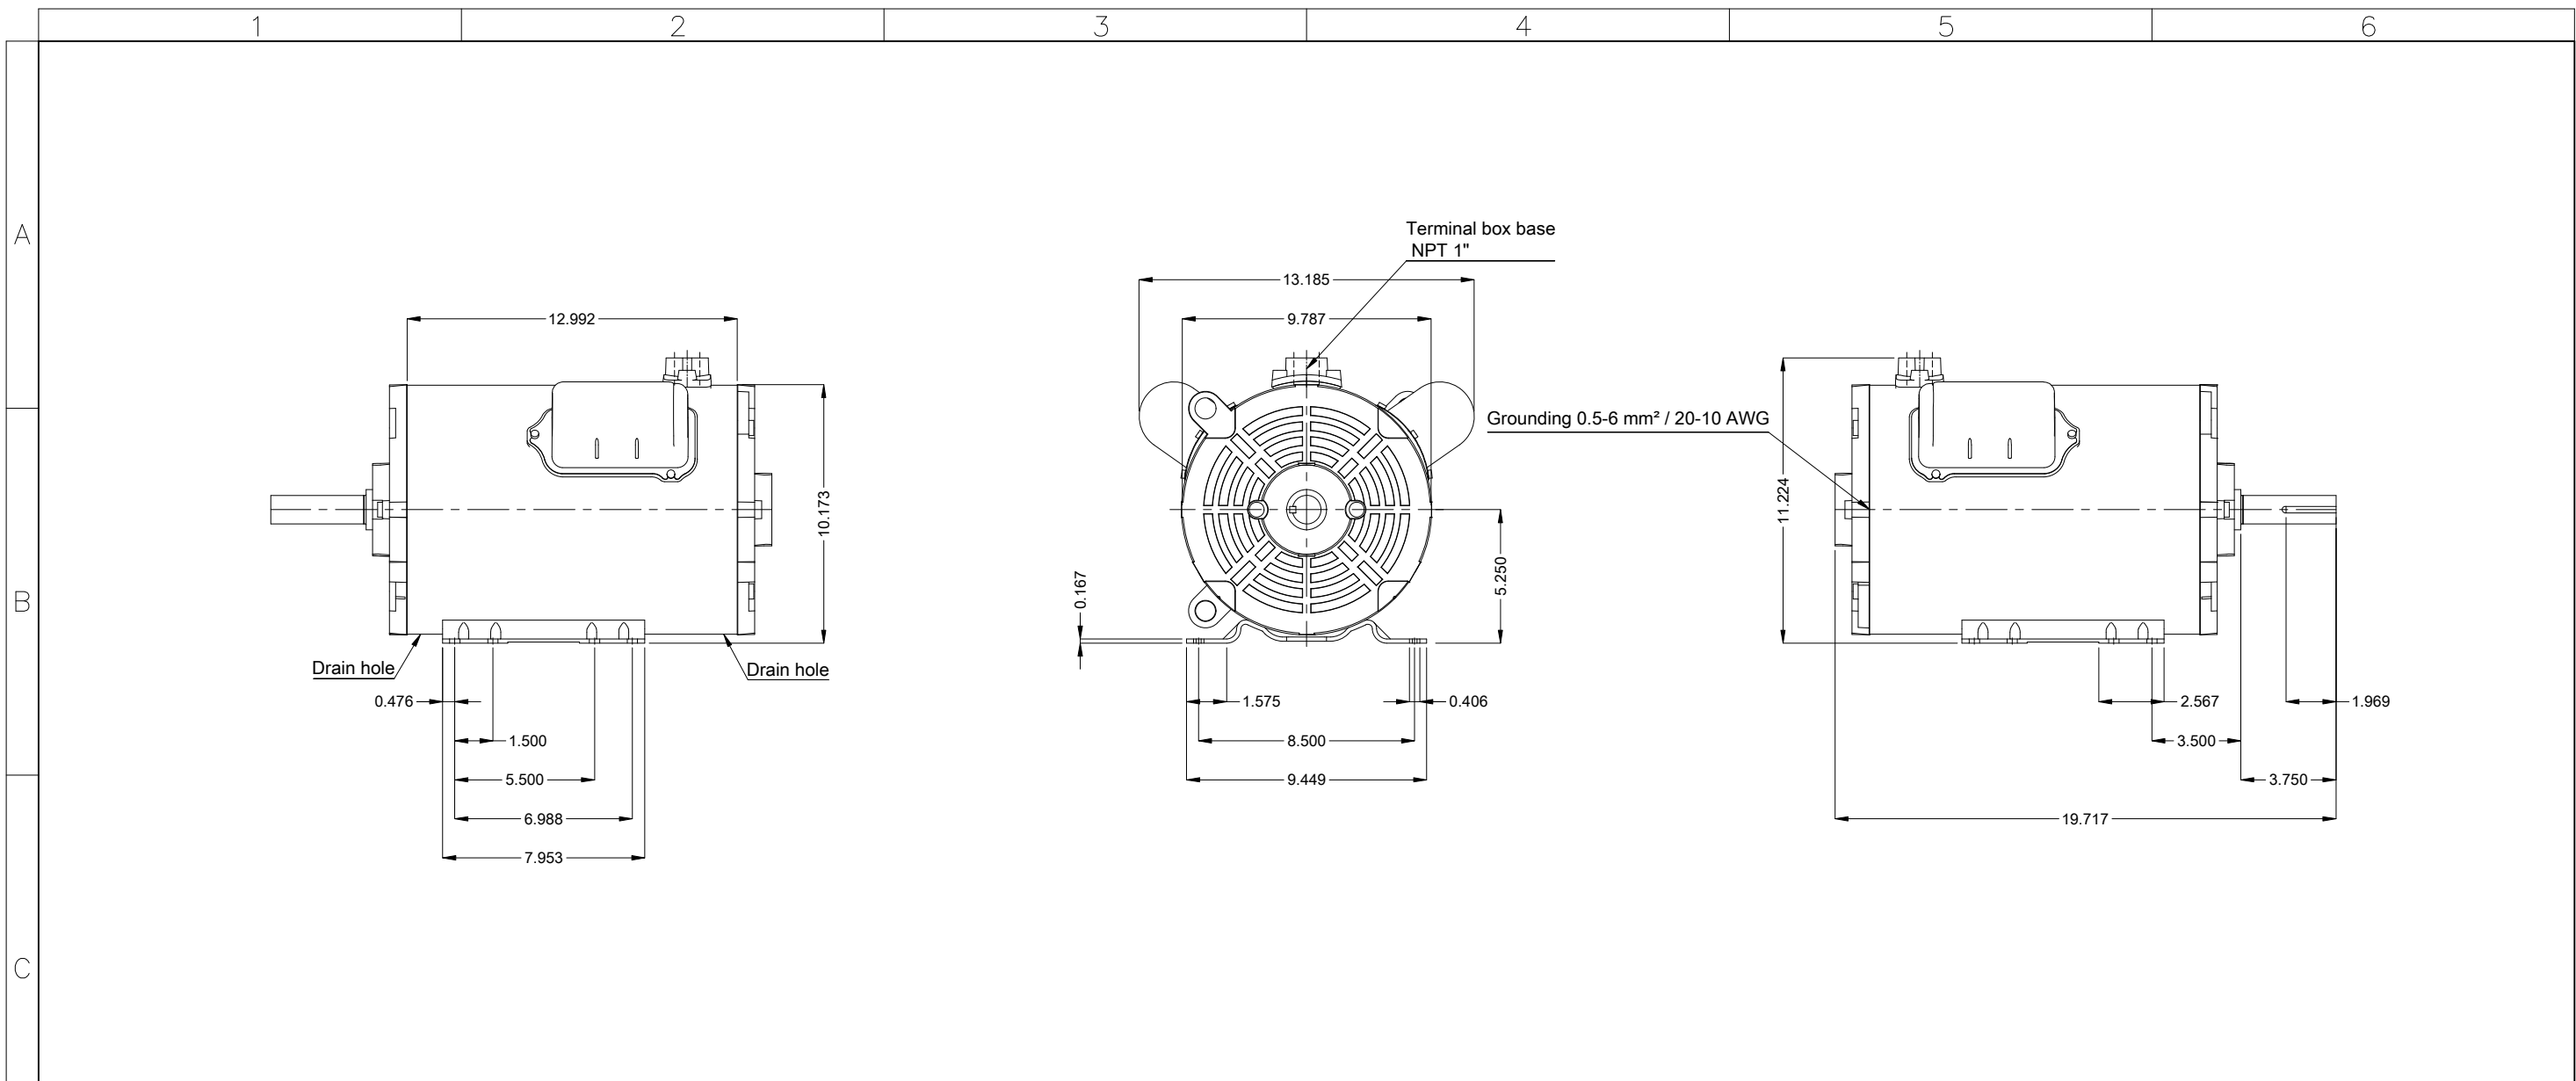

Mounting MARKET F-3/B3T  
 Mounting B3T

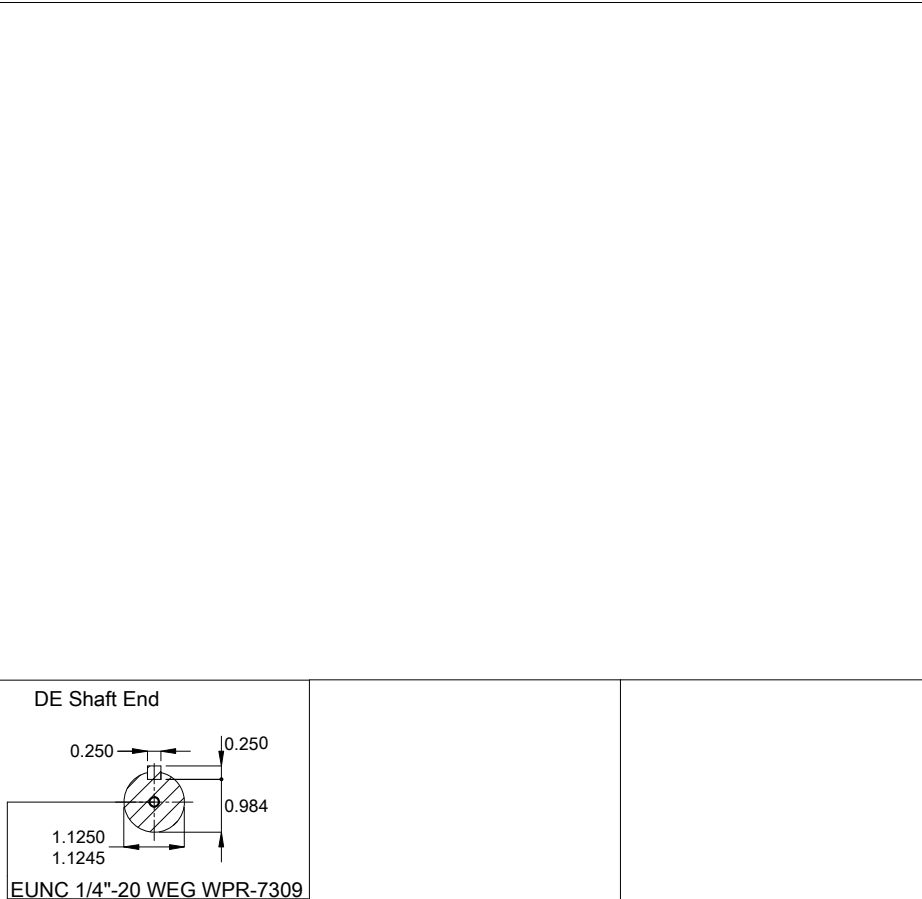

10-15 HP 02 Poles 60 Hz										A	
Scale 2 : 13											
HYBRISUSER										00	
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	SINGLE PH. MOTOR ROLLED STEEL GRAIN DRYER					PREVIEW		WDD 00		
CHECKED		FRAME 213/5TZ IP55 TEAO					SHEET 1 / 1				
RELEASED											
REL. DATE											