

DATA SHEET



Single Phase Induction Motor - Squirrel Cage

Customer :					
Product line		: General Single-Phase		Product code : 10083691	
Frame	: B56	Locked rotor time	: 10s (cold) 6s (hot)		
Output	: 0.33 HP (0.25 kW)	Temperature rise	: 80 K		
Poles	: 4	Duty cycle	: Cont.(S1)		
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C		
Rated voltage	: 115/208-230 V	Altitude	: 1000 m.a.s.l.		
Rated current	: 5.60/2.70-2.80 A	Protection degree	: IP55		
L. R. Amperes	: 32.5/15.7-16.2 A	Cooling method	: IC411 - TEFC		
LRC	: 5.8x(Code N)	Mounting	: F-1		
No load current	: 4.60/1.98-2.30 A	Rotation ¹	: Both (CW and CCW)		
Rated speed	: 1750 rpm	Noise level ²	: 55.0 dB(A)		
Slip	: 2.78 %	Starting method	: Direct On Line		
Rated torque	: 0.137 kgfm	Approx. weight ³	: 9.6 kg		
Locked rotor torque	: 340 %				
Breakdown torque	: 280 %				
Insulation class	: B				
Service factor	: 1.15				
Moment of inertia (J)	: 0.0026 kgm ²				
Output	50%	75%	100%	Foundation loads	
Efficiency (%)	49.0	58.0	61.0	Max. traction : 7 kgf	
Power Factor	0.44	0.53	0.62	Max. compression : 17 kgf	
		<u>Drive end</u>		<u>Non drive end</u>	
Bearing type	:	6203 ZZ		6202 ZZ	
Sealing	:	V'Ring		V'Ring	
Lubrication interval	:	-		-	
Lubricant amount	:	-		-	
Lubricant type	:	Mobil Polyrex EM			
Notes					
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>			<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	26/10/2024			1 / 2	

LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : General Single-Phase

Product code : 10083691

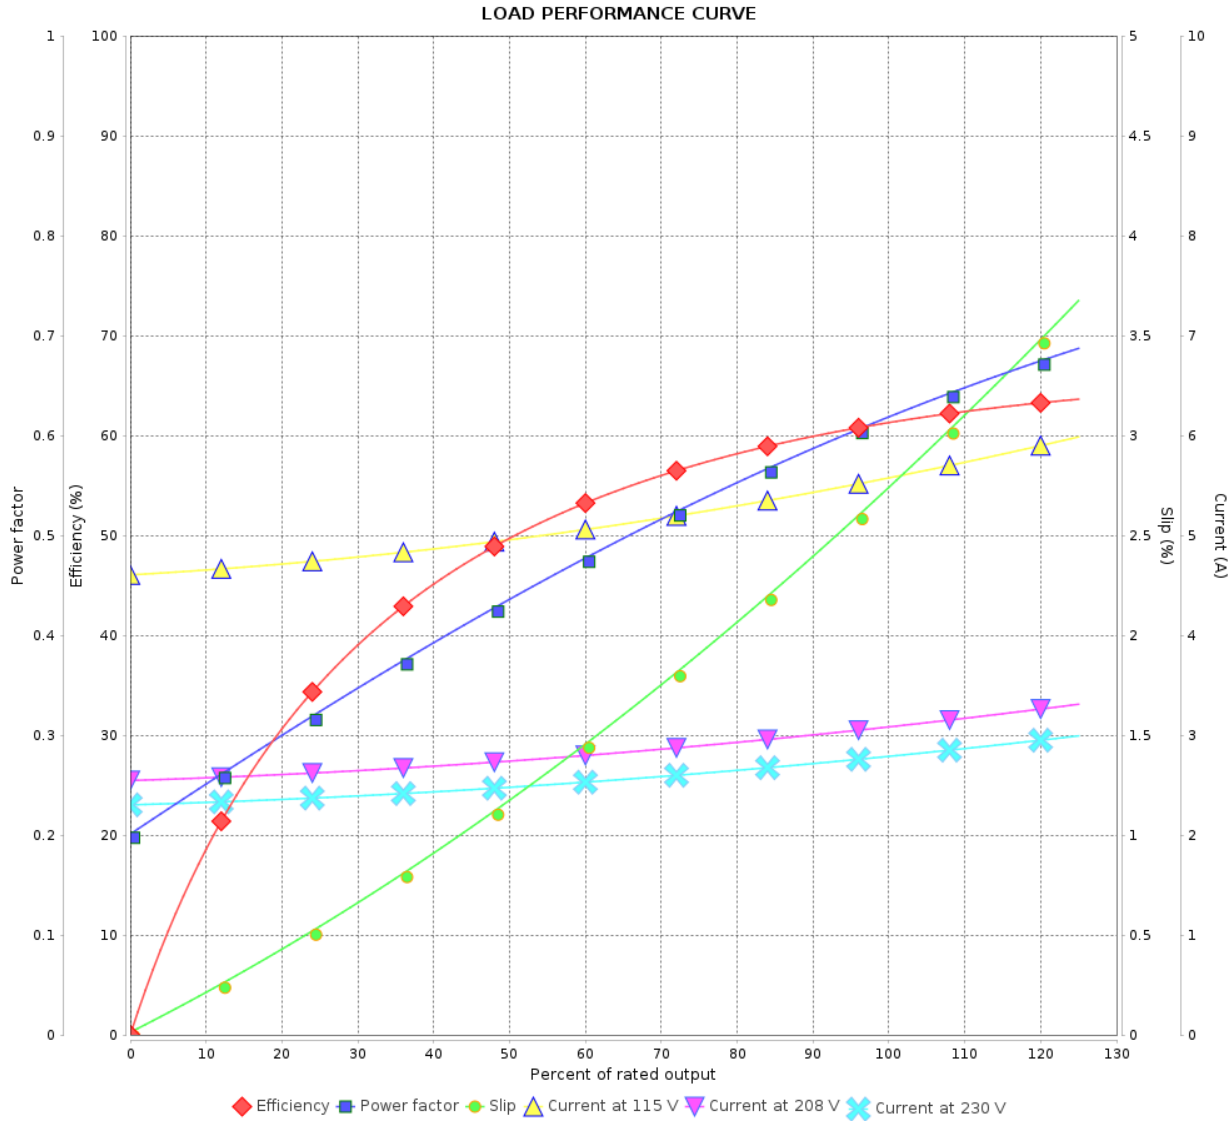

Performance : 115/208-230 V 60 Hz 4P

Rated current : 5.60/2.70-2.80 A
 LRC : 5.8
 Rated torque : 0.137 kgfm
 Locked rotor torque : 340 %
 Breakdown torque : 280 %
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0026 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : B
 Service factor :
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	26/10/2024			

