DATA SHEET
Three Phase Induction Motor - Squirrel Cage

Customer	: V.J. PAMENSKY CANADA INC.
Product line	: W01 - TEAO - Grain Dryer
Product code	: 18661282

Frame	: 213/5TZ	Cooling method	: IC418 - TEAO
Insulation class	: F	Minimum air speed over motor	: 20.1 m/s
Duty cycle	: S1	Mounting	: F-3/B3T
Ambient temperature	: -20 °C to +40 °C	Rotation[1]	: Counter clockwise
Altitude	: 3280 ft	Starting method	: Direct On Line
Protection degree	: IP55	Approx. weight[3]	: 129 lb
Design	: B	Moment of inertia (J)	: 0.6787 sq.ft.lb

Output		10 HP (7.5 kW)	15 HP (11 kW)
Poles		2	2
Frequency		60 Hz	60 Hz
Rated voltage		575 V	575 V
Rated current		9.92 A	13.8 A
L. R. Amperes		72.4 A	96.3 A
LRC		7.3	7.0
No load current		3.84 A	3.84 A
Rated speed		3550 rpm	3510 rpm
Slip		1.39 %	2.50 %
Rated torque		14.6 ft.lb	22.1 ft.lb
Locked rotor torque		350 %	230 %
Pull up torque		285 %	185 %
Breakdown torque		460 %	290 %
Service factor		1.00	1.00
Temperature rise		105 K	105 K
Noise level[2]		70.0 dB(A)	70.0 dB(A)
Locked rotor time (hot)		23 s	11 s
Locked rotor time (cold)		41 s	20 s
Efficiency (%)	50%	90.9	91.8
	75%	92.3	91.8
	100%	92.5	91.0
Power Factor	50%	0.63	0.76
	75%	0.76	0.85
	100%	0.82	0.88

	Drive end	Non drive end
Bearing type	6208-ZZ	6206-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	:
Max. compression	:
Load type	: -
Load torque	: -
Load inertia (J=GD²/4)	: -

Notes
See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Rev.	Checked	Date

Performed by	farazq		1847422562	
Checked by	AUTOMATICO		Page	Rev.
Date	12/05/2026		1 / 2	0

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

DATA SHEET
Three Phase Induction Motor - Squirrel Cage

Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEAO - Grain Dryer Product code : 18661282

Thermal protection ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155°C

Notes

Standards				
	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		


This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.


These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.


Rev.	Changes Summary	Rev.	Checked	Date

Performed by	farazq		1847422562	
Checked by	AUTOMATICO		Page	Rev.
Date	12/05/2026		2 / 2	0


This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

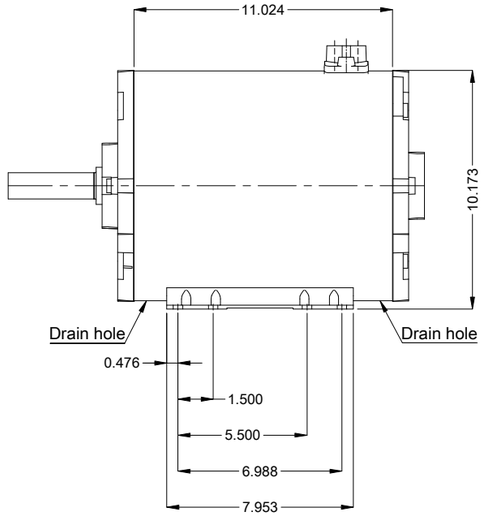

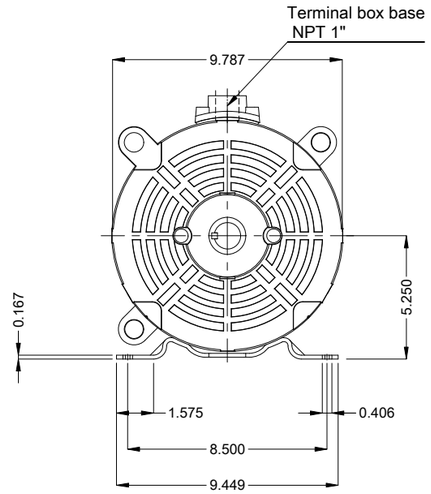

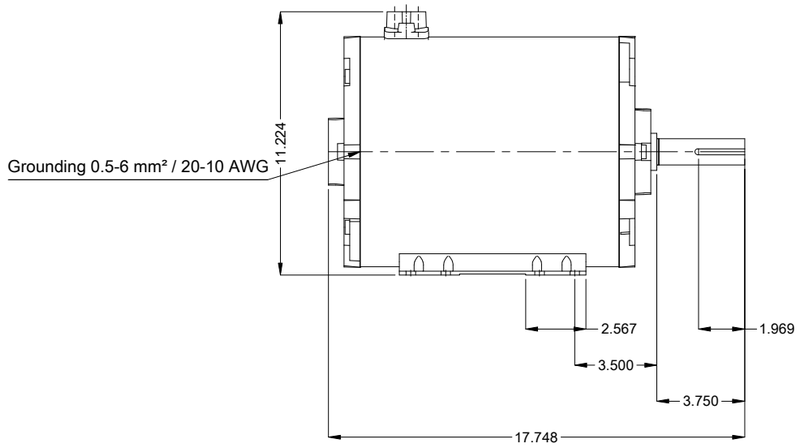

DE Shaft End



EUNC 1/4"-20 WEG WPR-7309

Color RAL 7031
Painting plan 207N
Mounting MARKET F-3/B3T
Mounting B3T

10-15 HP 02 Poles 60 Hz | A

Scale 2 : 13

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
			HYBRISUSER				00

EXECUTED	HYBRISUSER
CHECKED	
RELEASED	
REL. DATE	

THREE PH. MOTOR ROLLED STEEL GRAIN DRYER
FRAME 213/5TZ IP55 TEAO

PREVIEW
WDD 00
SHEET 1 / 1

Dimensions in inches

A3

WEG's property. Forbidden reproduction without previous authorization.