

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Standard Efficiency Three-Phase	Product code :	13417435
Frame	: 56H	Cooling method	: IC411 - TEFC	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 18.2 kg	
Protection degree	: IP55	Moment of inertia (J)	: 0.0054 kgm ²	
Design	: A			
Output [HP]	3			
Poles	2			
Frequency [Hz]	60			
Rated voltage [V]	575			
Rated current [A]	3.01			
L. R. Amperes [A]	25.6			
LRC [A]	8.5x(Code K)			
No load current [A]	1.12			
Rated speed [RPM]	3480			
Slip [%]	3.33			
Rated torque [kgfm]	0.626			
Locked rotor torque [%]	270			
Breakdown torque [%]	280			
Service factor	1.15			
Temperature rise	80 K			
Locked rotor time	10s (cold) 6s (hot)			
Noise level ²	68.0 dB(A)			
Efficiency (%)	25%			
	50%	80.0		
	75%	81.5		
	100%	81.5		
Power Factor	25%			
	50%	0.76		
	75%	0.86		
	100%	0.90		
Bearing type	: Drive end 6204 ZZ	Non drive end 6202 ZZ	Foundation loads	
Sealing	: V'Ring	V'Ring	Max. traction : 47 kgf	
Lubrication interval	: -	-	Max. compression : 65 kgf	
Lubricant amount	: -	-		
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.	
Rev.	Changes Summary		Performed	Checked
Performed by			Page	Revision
Checked by				
Date	11/05/2022			
This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A. Subject to change without notice				


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 13417435

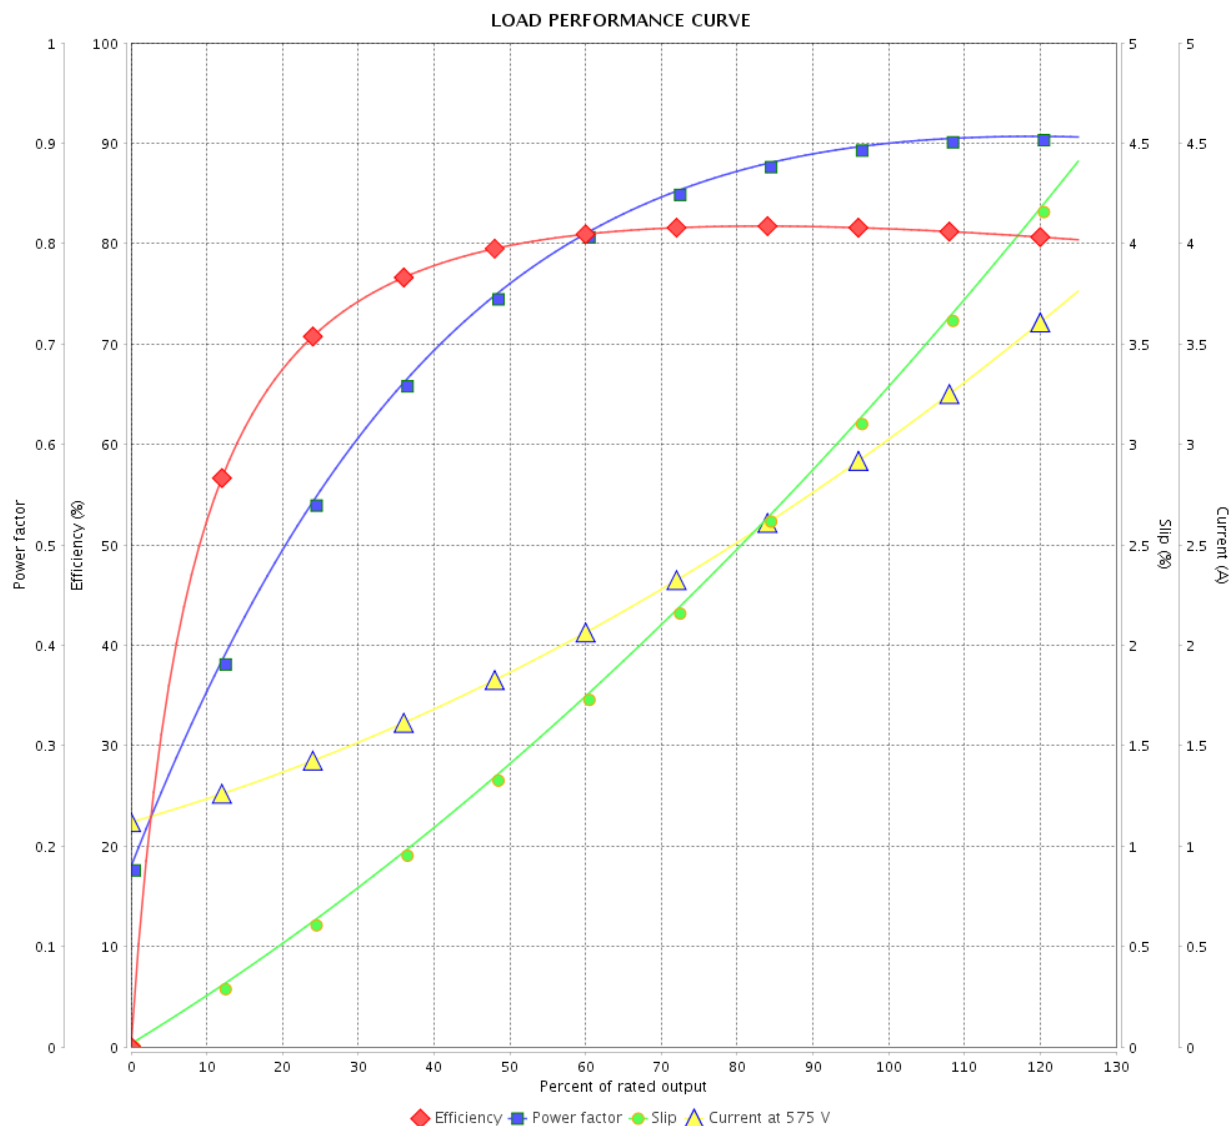

Performance : 575 V 60 Hz 2P

Rated current : 3.01 A
 LRC : 8.5
 Rated torque : 0.626 kgfm
 Locked rotor torque : 270 %
 Breakdown torque : 280 %
 Rated speed : 3480 rpm

Moment of inertia (J) : 0.0054 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

