

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :				
Product line		: Standard Efficiency Three-Phase	Product code :	13915004
Frame	: 56	Cooling method	: IC01 - ODP	
Insulation class	: F	Mounting	: F-1	
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)	
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line	
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 10.1 kg	
Design	: A	Moment of inertia (J)	: 0.0030 kgm ²	
Output [HP]	1			
Poles	4			
Frequency [Hz]	60			
Rated voltage [V]	208			
Rated current [A]	3.98			
L. R. Amperes [A]	26.3			
LRC [A]	6.6x(Code L)			
No load current [A]	2.41			
Rated speed [RPM]	1750			
Slip [%]	2.78			
Rated torque [kgfm]	0.415			
Locked rotor torque [%]	250			
Breakdown torque [%]	290			
Service factor				
Temperature rise	80 K			
Locked rotor time	18s (cold) 10s (hot)			
Noise level ²	52.0 dB(A)			
Efficiency (%)	25%			
	50%	68.0		
	75%	74.0		
	100%	77.0		
Power Factor	25%			
	50%	0.44		
	75%	0.58		
	100%	0.68		
Bearing type	: Drive end 6204 ZZ Non drive end 6202 ZZ	Foundation loads		
Sealing	: Without Bearing Seal Without Bearing Seal	Max. traction : 33 kgf		
		Max. compression : 43 kgf		
Lubrication interval	: -			
Lubricant amount	: -			
Lubricant type	: Mobil Polyrex EM			
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 2	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Standard Efficiency Three-Phase Product code : 13915004



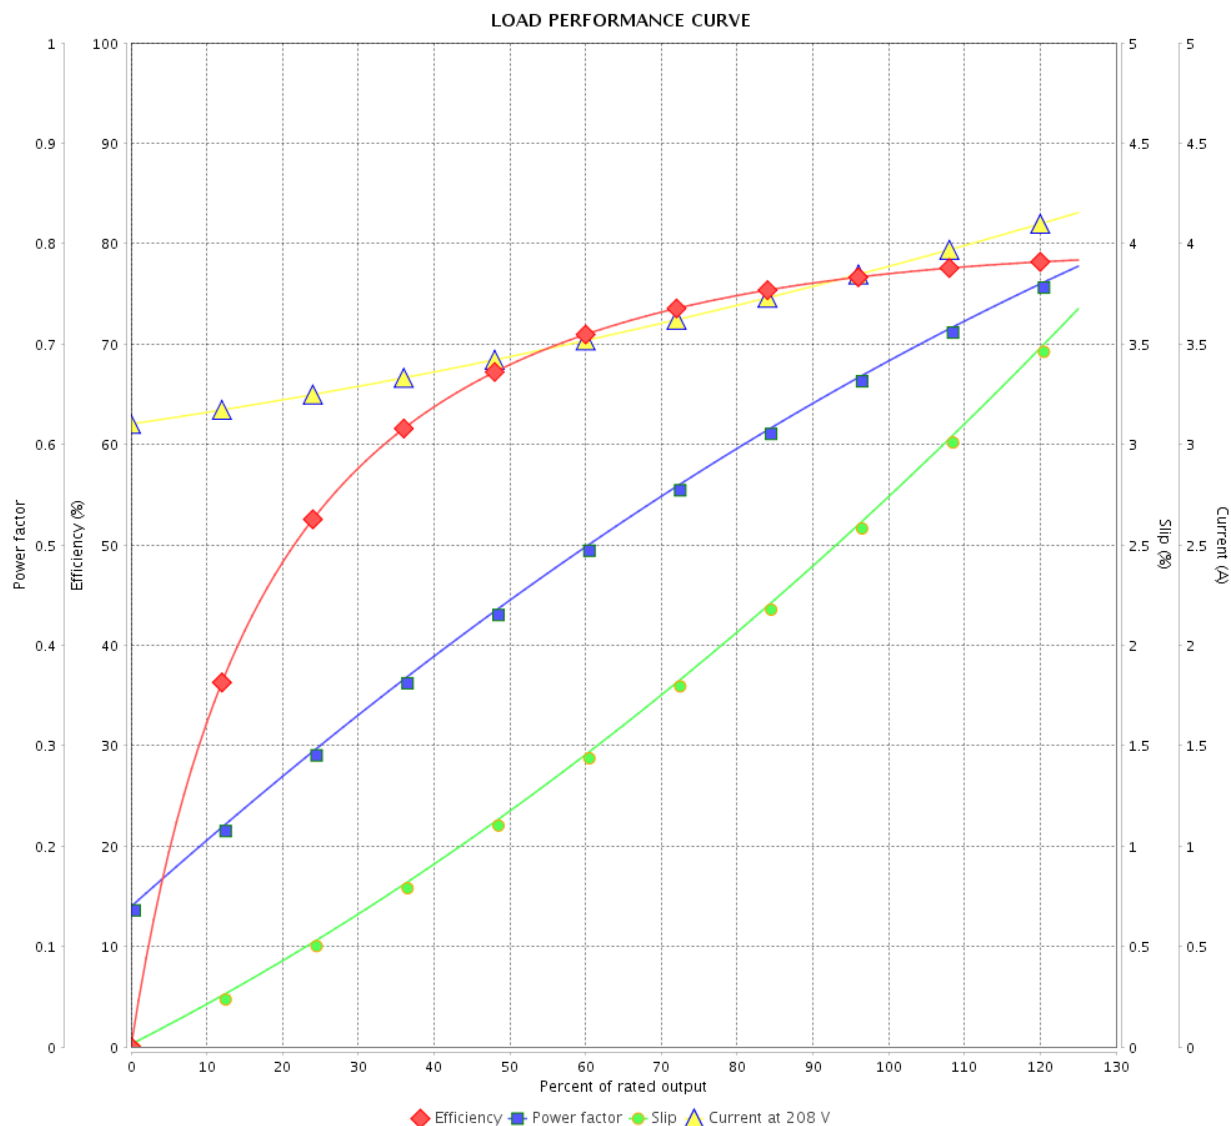




Performance : 208 V 60 Hz 4P

Rated current : 3.98 A
 LRC : 6.6
 Rated torque : 0.415 kgfm
 Locked rotor torque : 250 %
 Breakdown torque : 290 %
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0030 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor :
 Temperature rise : 80 K
 Design : A

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

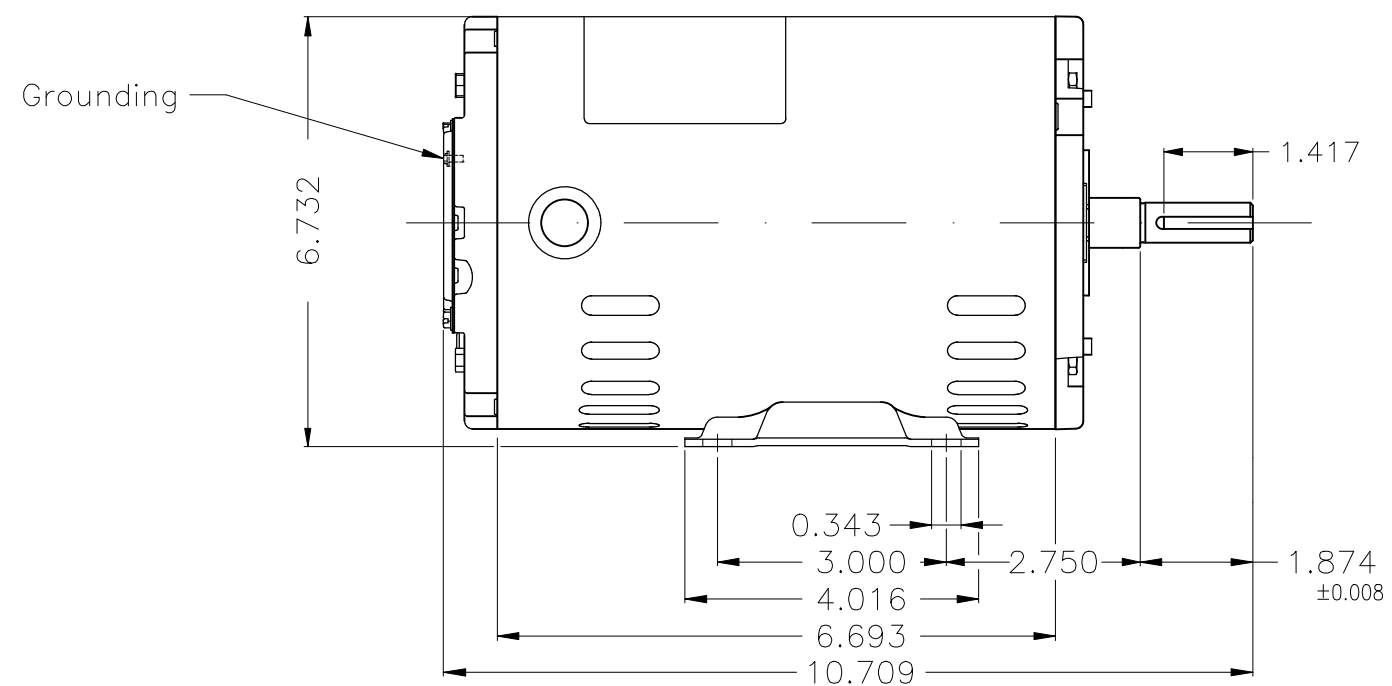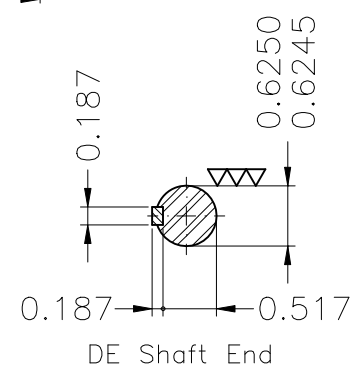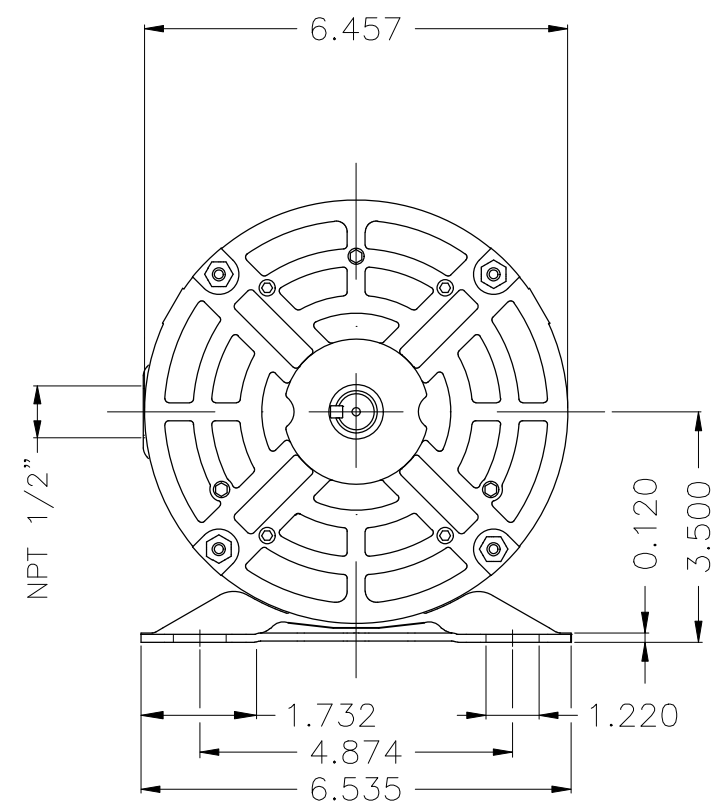

Color Munsell N 1 matte black							
Painting plan 207N							
Mounting F-1/B3R(D)							
				HYBRISUSER			00
ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED	DATE VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR ROLLED STEEL FRAME 56 IP21 ODP	PREVIEW			
CHECKED				WDD 00			
RELEASED							
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1	