DATA SHEET

Checked by

Date

11/05/2025

Three Phase Induction Motor - Squirrel Cage



Customer Product line : W22 NEMA Premium Efficiency Product code: 12717282 Three-Phase Frame : 213/5TC Cooling method : IC411 - TEFC Insulation class Mounting : F-1 Duty cycle : Cont.(S1) Rotation¹ : Both (CW and CCW) Ambient temperature : -20°C to +40°C Starting method : Direct On Line : 1000 m.a.s.l. Approx. weight³ : 77.8 kg Altitude Protection degree : IP55 Moment of inertia (J) : 0.0566 kgm² Design : B Output [HP] 7.5 7.5 7.5 7.5 Poles 4 4 4 4 60 50 Frequency [Hz] 50 50 Rated voltage [V] 230/460 380 400 415 Rated current [A] 18.4/9.18 11.0 10.6 10.3 L. R. Amperes [A] 130/65.2 61.6 65.7 69.0 LRC [A] 7.1x(Code H) 5.6x(Code F) 6.2x(Code G) 6.7x(Code H) No load current [A] 8.40/4.20 4.10 4.40 4.70 Rated speed [RPM] 1765 1455 1460 1465 Slip [%] 1.94 3.00 2.67 2.33 Rated torque [kgfm] 3.08 3.74 3.73 3.72 Locked rotor torque [%] 220 170 190 210 Breakdown torque [%] 310 240 270 290 Service factor 1.25 1.25 1.25 1.25 Temperature rise 80 K 80 K 80 K 80 K Locked rotor time 36s (cold) 20s (hot) 27s (cold) 15s (hot) 27s (cold) 15s (hot) 27s (cold) 15s (hot) Noise level² 58.0 dB(A) 56.0 dB(A) 56.0 dB(A) 56.0 dB(A) 25% 50% 89.5 89.5 89.5 89.5 Efficiency (%) 75% 91.0 89.5 90.2 90.2 100% 91.7 89.6 90.2 90.2 25% 50% 0.66 0.72 0.69 0.66 Power Factor 75% 0.76 0.81 0.78 0.76 0.82 0.83 0.82 100% 0.85 Losses at normative operating points (speed;torque), in percentage of rated output power P1 (0,9;1,0) 8.8 8.8 8.8 8.8 P2 (0,5;1,0) 7.0 7.0 7.0 7.0 P3 (0,25;1,0) 6.5 6.5 6.5 6.5 P4 (0,9;0,5) 4.9 4.9 4.9 Losses (%) 4.9 P5 (0,5;0,5) 3.3 3.3 3.3 3.3 P6 (0,5;0,25) 2.4 2.4 2.4 2.4 P7 (0,25;0,25) 1.6 1.6 1.6 1.6 Non drive end Foundation loads Drive end Bearing type 6308 ZZ 6207 ZZ : 160 kgf Max. traction Sealing V'Ring V'Ring Max. compression : 238 kgf Lubrication interval Lubricant amount Lubricant type Mobil Polyrex EM This revision replaces and cancel the previous one, which These are average values based on tests with sinusoidal must be eliminated. power supply, subject to the tolerances stipulated in NEMA MG-1. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. Performed Checked Rev. **Changes Summary** Date Performed by

Page

1/6

Revision

DATA SHEET



Three Phase Induction Motor - Squirrel Cage	<u> </u>
Customer :	
Notes	
USABLE @208V 19.9A SF 1.15 SFA 22.9A	

Rev.		Changes Summary	Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	11/05/2025			2/6	


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Product code : 12717282

Three-Phase

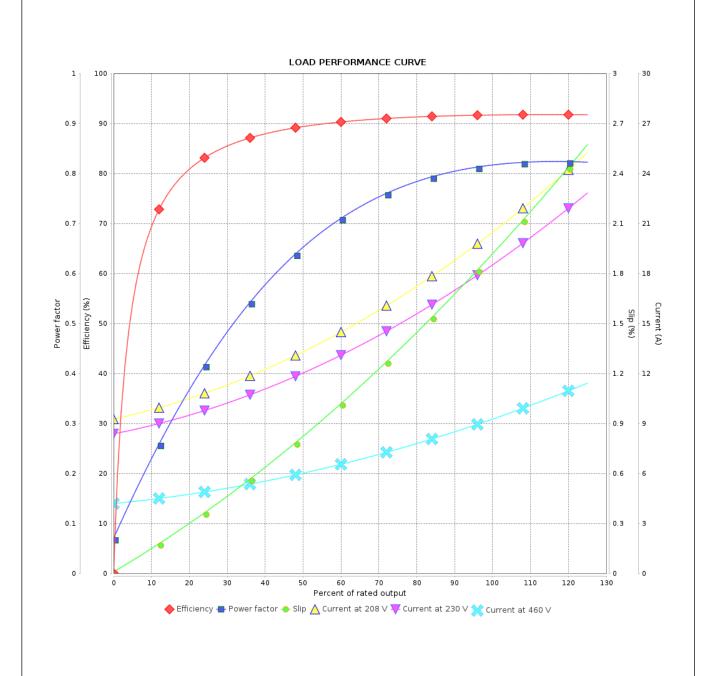

Performance	:	: 230/460 V 60 Hz 4P					
Rated current	-	18.4/9.18 A	1	Moment of inertia (J)		l ²	
LRC	:	7.1	Duty cycle	Duty cycle			
Rated torque	:	3.08 kgfm	Insulation	Insulation class		: F	
Locked rotor torq	ue :	220 %	Service fa	Service factor		: 1.25	
Breakdown torqu	e :	310 %	Temperat	Temperature rise		: 80 K	
Rated speed	:	1765 rpm	Design	Design		: B	
Rev. Changes Summary		ary	Performed	Checked	Date		

Mateu Specu	. !	700 Ipili	Design		. D	
Rev.	Changes Summary		Performed	Checked	Date	
Performed by						
Checked by		-			Page	Revision
Date	11/05/2025	1			3/6	

Three Phase Induction Motor - Squirrel Cage



Customer :


Date

11/05/2025

Product line : W22 NEMA Premium Efficiency

Three-Phase

Product code: 12717282

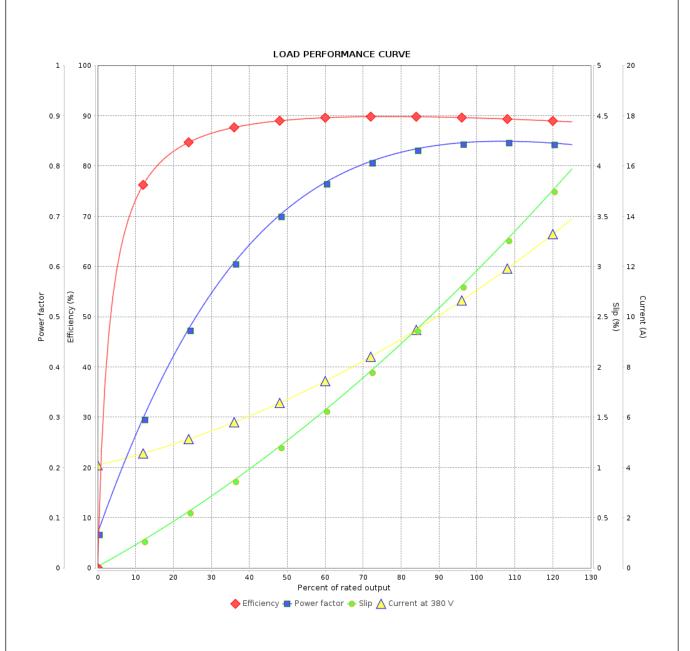

Performance : 380 V 50 Hz 4P IE3 : 11.0 A : 0.0566 kgm² Rated current Moment of inertia (J) **LRC** Duty cycle : Cont.(S1) : 5.6 : 3.74 kgfm Insulation class Rated torque : F Locked rotor torque : 170 % Service factor : 1.25 Breakdown torque : 240 % Temperature rise : 80 K Rated speed : 1455 rpm Design : B Rev. Performed Checked Date **Changes Summary** Performed by Page Checked by Revision

4/6

Three Phase Induction Motor - Squirrel Cage



Customer :


Checked by

Date

11/05/2025

Product line : W22 NEMA Premium Efficiency Product code : 12717282

Three-Phase

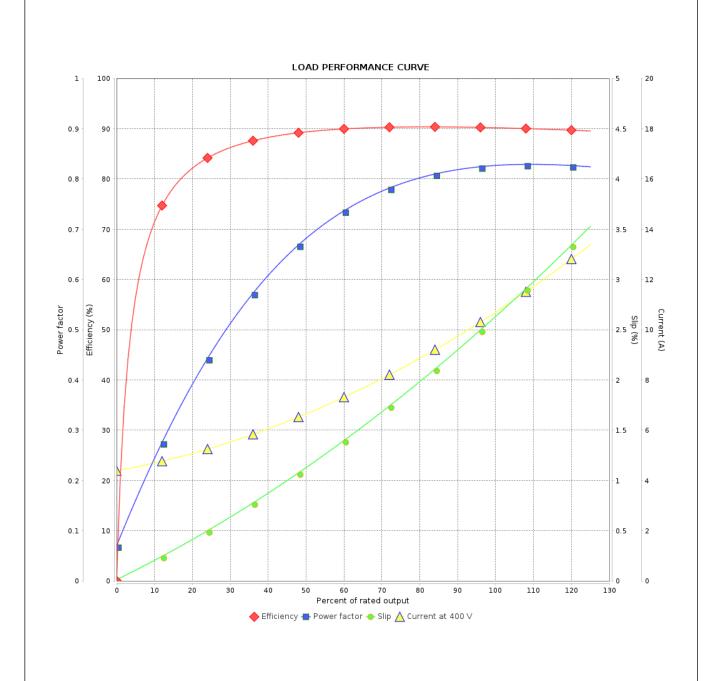

Performance	: 400 V 50 Hz 4P IE3					
Rated current LRC Rated torque Locked rotor torque Breakdown torque Rated speed	: 10.6 A : 6.2 : 3.73 kgfm : 190 % : 270 % : 1460 rpm	Moment of inertia (J) Duty cycle Insulation class Service factor Temperature rise Design		: 0.0566 kgm ² : Cont.(S1) : F : 1.25 : 80 K : B	: F : 1.25 : 80 K	
Rev.	Changes Summary		Performed	Checked	Date	
Performed by						

Page

5/6

Revision

Three Phase Induction Motor - Squirrel Cage



Customer :


Date

11/05/2025

Product line : W22 NEMA Premium Efficiency

Three-Phase

Product code: 12717282

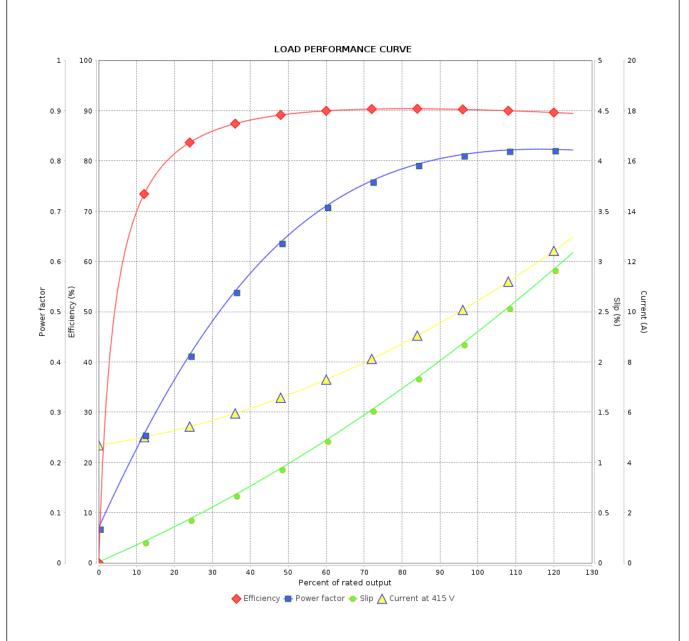

Performance : 415 V 50 Hz 4P IE3 : 10.3 A : 0.0566 kgm² Rated current Moment of inertia (J) **LRC** : 6.7 Duty cycle : Cont.(S1) Insulation class Rated torque : 3.72 kgfm : F Locked rotor torque : 210 % Service factor : 1.25 Breakdown torque : 290 % Temperature rise : 80 K Rated speed : 1465 rpm Design : B Rev. Performed Checked Date **Changes Summary** Performed by Checked by Revision Page

6/6

