

# DATA SHEET

## Single Phase Induction Motor - Squirrel Cage



Customer :				
Product line : Single-Phase		Product code : 13993679		
Frame : 56 Insulation class : F Duty cycle : Cont.(S1) Ambient temperature : -20°C to +40°C Altitude : 1000 m.a.s.l. Protection degree : IP55 Design : N		Cooling method : IC411 - TEFC Mounting : F-1 Rotation <sup>1</sup> : Both (CW and CCW) Starting method : Direct On Line Approx. weight <sup>3</sup> : 12.8 kg Moment of inertia (J) : 0.0017 kgm²		
Output [HP]		0.75		
Poles		2		
Frequency [Hz]		60		
Rated voltage [V]		115/208-230		
Rated current [A]		8.00/4.42-4.00		
L. R. Amperes [A]		64.0/35.4-32.0		
LRC [A]		8.0x(Code L)		
No load current [A]		4.00/1.72-2.00		
Rated speed [RPM]		3500		
Slip [%]		2.78		
Rated torque [kgfm]		0.156		
Locked rotor torque [%]		280		
Breakdown torque [%]		290		
Service factor				
Temperature rise		80 K		
Locked rotor time		18s (cold) 10s (hot)		
Noise level <sup>2</sup>		68.0 dB(A)		
Efficiency (%)	25%			
	50%	52.0		
	75%	62.0		
	100%	66.0		
Power Factor	25%			
	50%	0.81		
	75%	0.87		
	100%	0.91		
Bearing type : Drive end 6203 ZZ Non drive end 6202 ZZ Sealing : V'Ring V'Ring Lubrication interval : - - Lubricant amount : - - Lubricant type : Mobil Polyrex EM		Foundation loads Max. traction : 7 kgf Max. compression : 20 kgf		
Notes				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked
Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 2	

# LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Single-Phase

Product code : 13993679

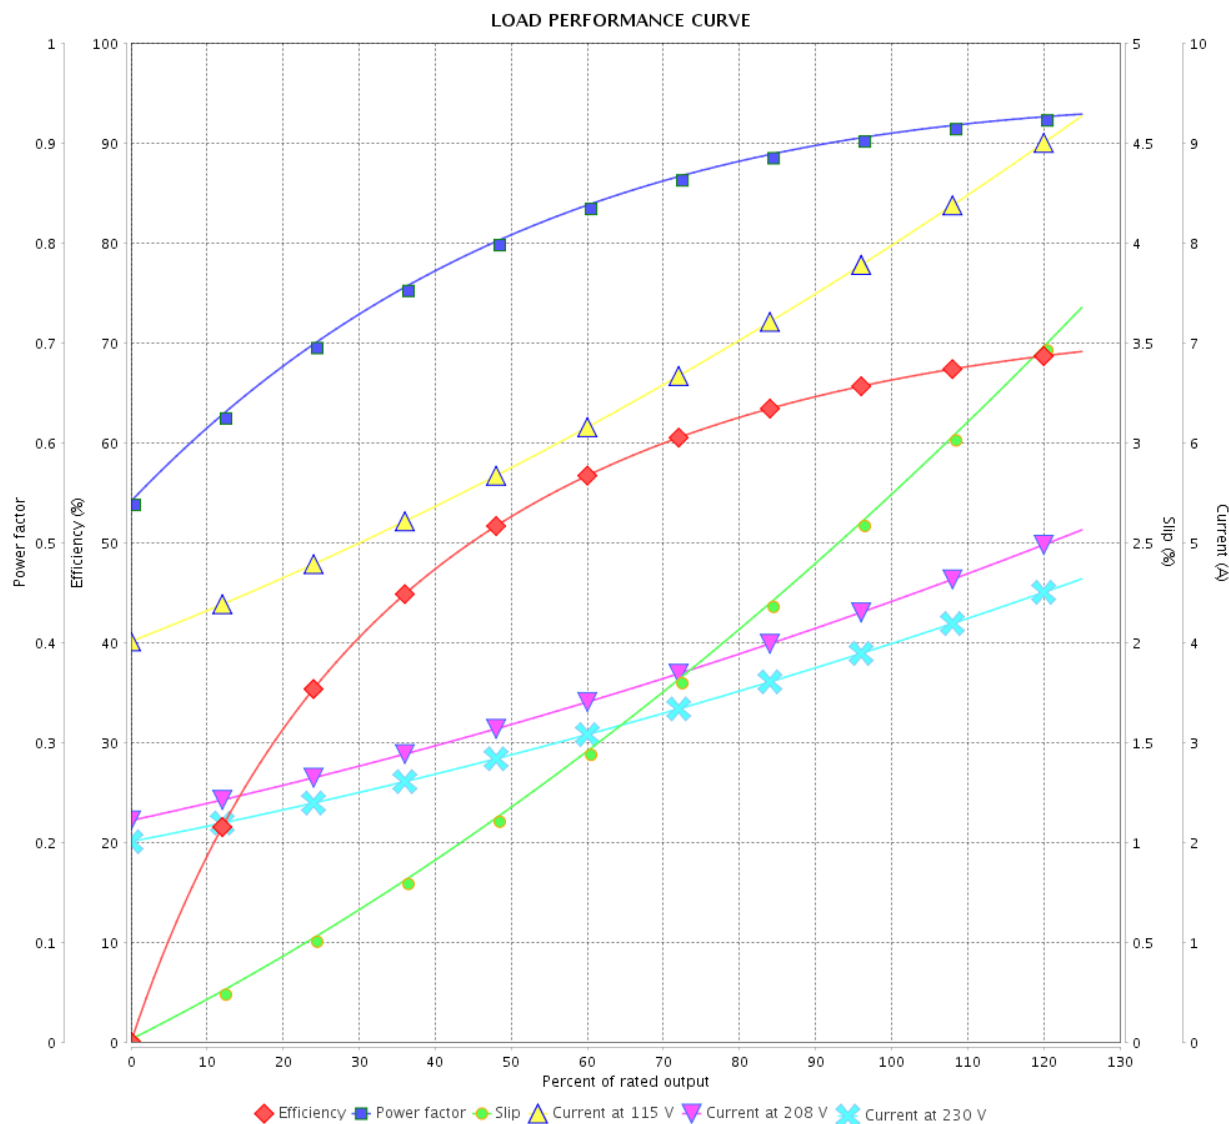

Performance : 115/208-230 V 60 Hz 2P

Rated current : 8.00/4.42-4.00 A  
 LRC : 8.0  
 Rated torque : 0.156 kgfm  
 Locked rotor torque : 280 %  
 Breakdown torque : 290 %  
 Rated speed : 3500 rpm

Moment of inertia (J) : 0.0017 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : F  
 Service factor :  
 Temperature rise : 80 K  
 Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				2 / 2	
Date					

