

# DATA SHEET



## Single Phase Induction Motor - Squirrel Cage

Customer	:			
Product line	: Jet Pump - C type Single-Phase	Product code : 14009860		
Frame	: 56C	Cooling method : IC01 - ODP		
Insulation class	: F	Mounting : F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup> : CCW		
Ambient temperature	: -20°C to +40°C	Starting method : Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup> : 15.2 kg		
Design	: L	Moment of inertia (J) : 0.0027 kgm <sup>2</sup>		
Output [HP]		1.5		
Poles		2		
Frequency [Hz]		60		
Rated voltage [V]		115/208-230		
Rated current [A]		12.4/6.86-6.20		
L. R. Amperes [A]		102/56.3-50.8		
LRC [A]		8.2x(Code J)		
No load current [A]		3.20/1.38-1.60		
Rated speed [RPM]		3500		
Slip [%]		2.78		
Rated torque [kgfm]		0.311		
Locked rotor torque [%]		260		
Breakdown torque [%]		270		
Service factor				
Temperature rise		80 K		
Locked rotor time		18s (cold) 10s (hot)		
Noise level <sup>2</sup>		58.0 dB(A)		
Efficiency (%)	25%			
	50%	73.0		
	75%	79.0		
	100%	81.5		
Power Factor	25%			
	50%	0.92		
	75%	0.95		
	100%	0.95		
Bearing type	: <u>Drive end</u> 6203 2RS <u>Non drive end</u> 6202 2RS	Foundation loads		
Sealing	: Without Bearing Seal Without Bearing Seal	Max. traction : 19 kgf		
Lubrication interval	: - -	Max. compression : 34 kgf		
Lubricant amount	: - -			
Lubricant type	: Mobil Polyrex EM			
Notes				
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>		<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	11/05/2022		1 / 2	


# LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Single-Phase Product code : 14009860

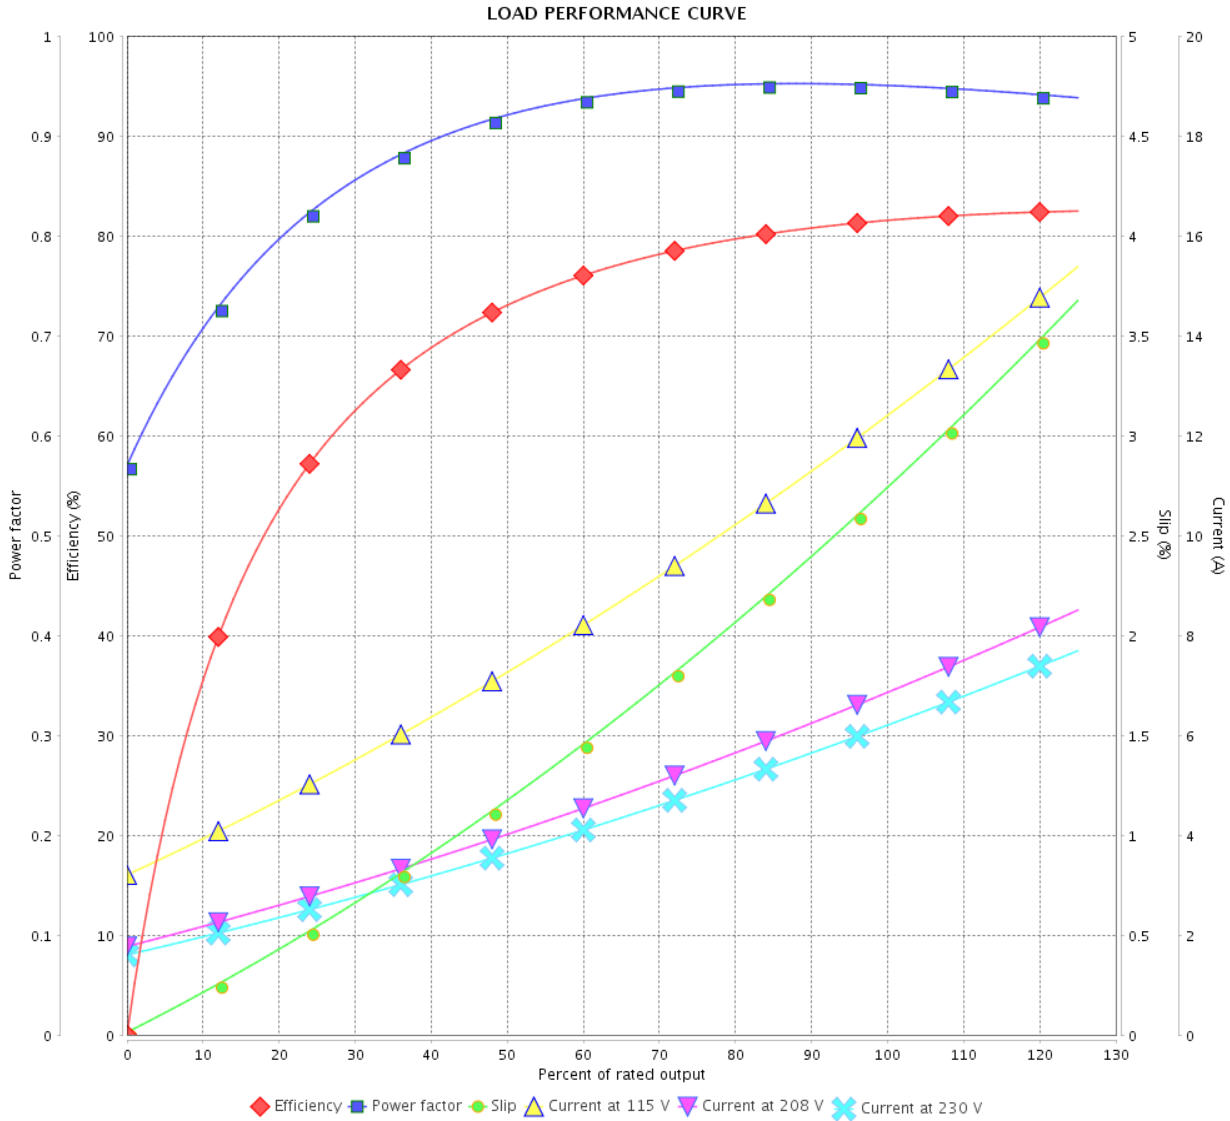




Performance : 115/208-230 V 60 Hz 2P

Rated current	: 12.4/6.86-6.20 A	Moment of inertia (J)	: 0.0027 kgm <sup>2</sup>
LRC	: 8.2	Duty cycle	: Cont.(S1)
Rated torque	: 0.311 kgfm	Insulation class	: F
Locked rotor torque	: 260 %	Service factor	:
Breakdown torque	: 270 %	Temperature rise	: 80 K
Rated speed	: 3500 rpm	Design	: L

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	11/05/2022			

1 2 3 4 5 6

A  
B  
C  
D  
E

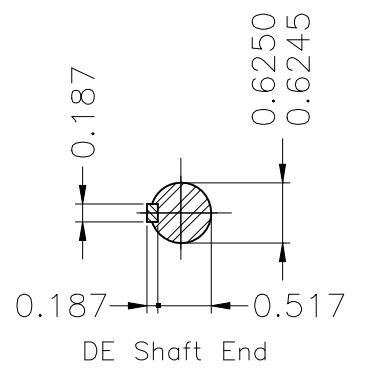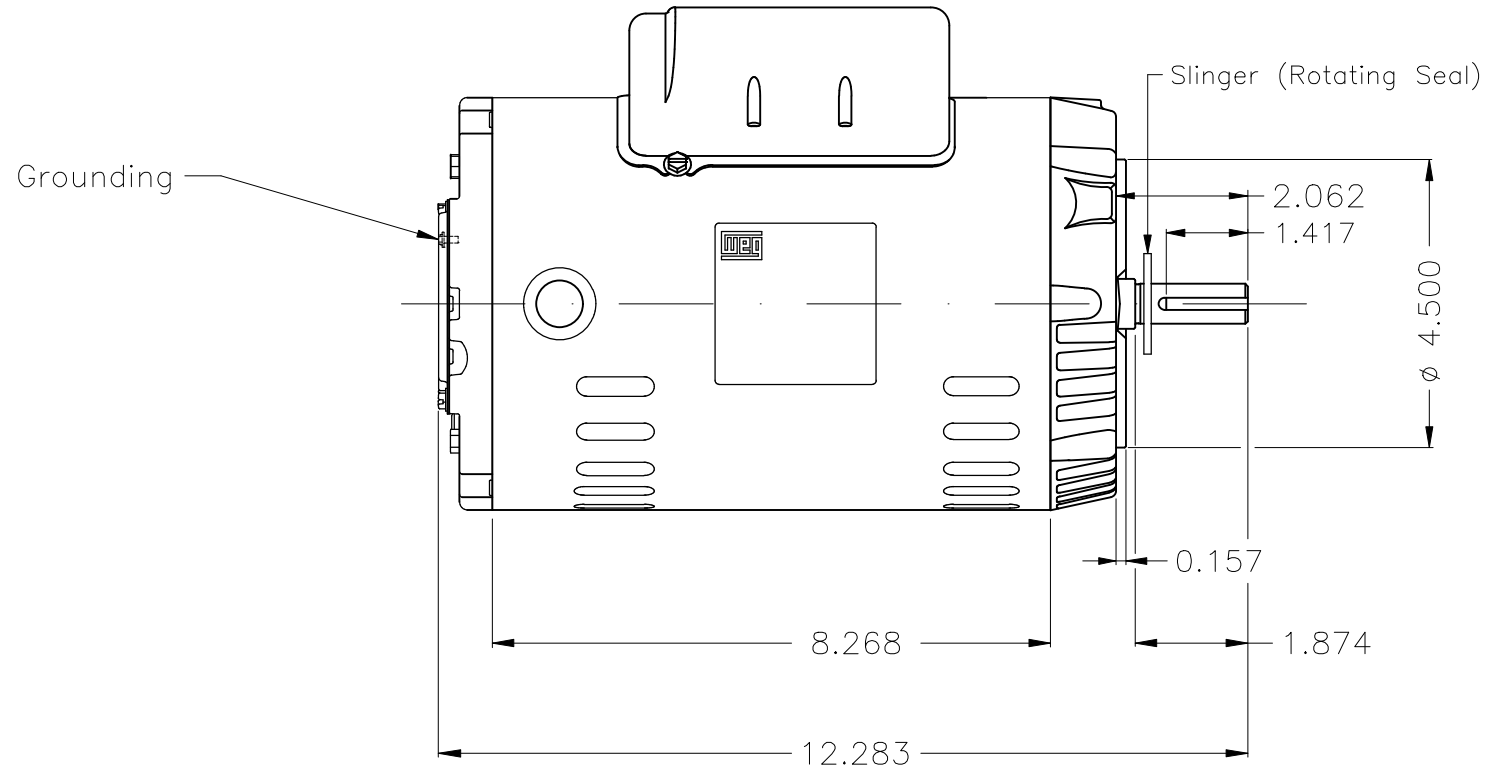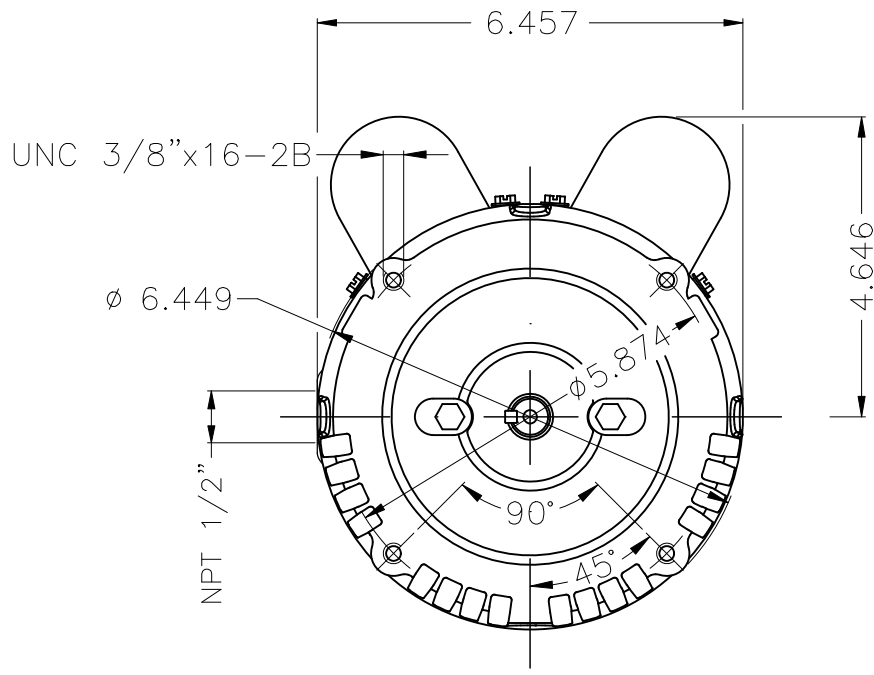

Color Munsell N 1 matte black									
Painting plan 207N									
Mounting F-1/B14R(D)									
HYBRISUSER 00									
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	SINGLE PH. MOTOR ROLLED STEEL JET PUMP KEYED PREM. EFF.			EXECUTED	CHECKED	RELEASED	DATE	VER
CHECKED		FRAME 56C IP21 ODP			EXECUTED	CHECKED	RELEASED	DATE	VER
RELEASED					EXECUTED	CHECKED	RELEASED	DATE	VER
REL. DATE		WMO	Jaragua do Sul	Product Engineering	WDD	00			
					SHEET		1 / 1		

1.5 HP 02 Poles 60 Hz

A



Dimensions in inches XME A3