

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Nema Premium Efficiency

Frame	: 213/5TC	Locked rotor time	: 10 s (hot) 18 s (cold)
Output	: 15 HP (11 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230/460 V	Altitude	: 3280 ft
Rated current	: 34.1/17.1 A	Protection degree	: IP55
L. R. Amperes	: 280/140 A	Cooling method	: IC411 - TEFC
LRC	: 8.2	Mounting	: F-1/B14R(D)
No load current	: 11.2/5.60 A	Rotation ¹	: Both
Rated speed	: 3535 rpm	Noise level ²	: 70.0 dB(A)
Slip	: 1.81 %	Vibration class	: A
Rated torque	: 22.0 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 280 %	Approx. weight ³	: 172 lb
Pull up torque	: 230 %	Painting plan	: 207N
Breakdown torque	: 330 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F	Design	: A
Service factor	: 1.15		
Moment of inertia (J)	: 0.6336 sq.ft.lb		

Output	50%	75%	100%
Efficiency (%)	90.2	91.0	91.0
Power Factor	0.76	0.85	0.89

Load type	: -
Load torque	: -
Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end
Bearing type #1	6208-ZZ	6206-ZZ
Bearing type #2	-	-
Lubrication interval	-	-
Lubricant amount #1	-	-
Lubricant amount #2	-	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	:
Max. compression	:

Notes

See notes on page 2.

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.5	6.6	6.1	5.0	3.1	2.4	1.5

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary			Rev.	Checked	Date
Performed by	farazq				1859574673	
Checked by	AUTOMATICO				Page	Rev.
Date	11/06/2026				1 / 2	0

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.



Product line : W01 - TEFC - Nema Premium Efficiency


Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes

USABLE @208V 37.6A SF 1.00 SFA 37.6A

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7		
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12		
	Noise	: MG1 - Part 9				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.			
Rev.		Changes Summary		Rev.	Checked	Date
Performed by		farazq	1859574673			
Checked by		AUTOMATICO				
Date		11/06/2026				
			Page	Rev.		
			2 / 2	0		

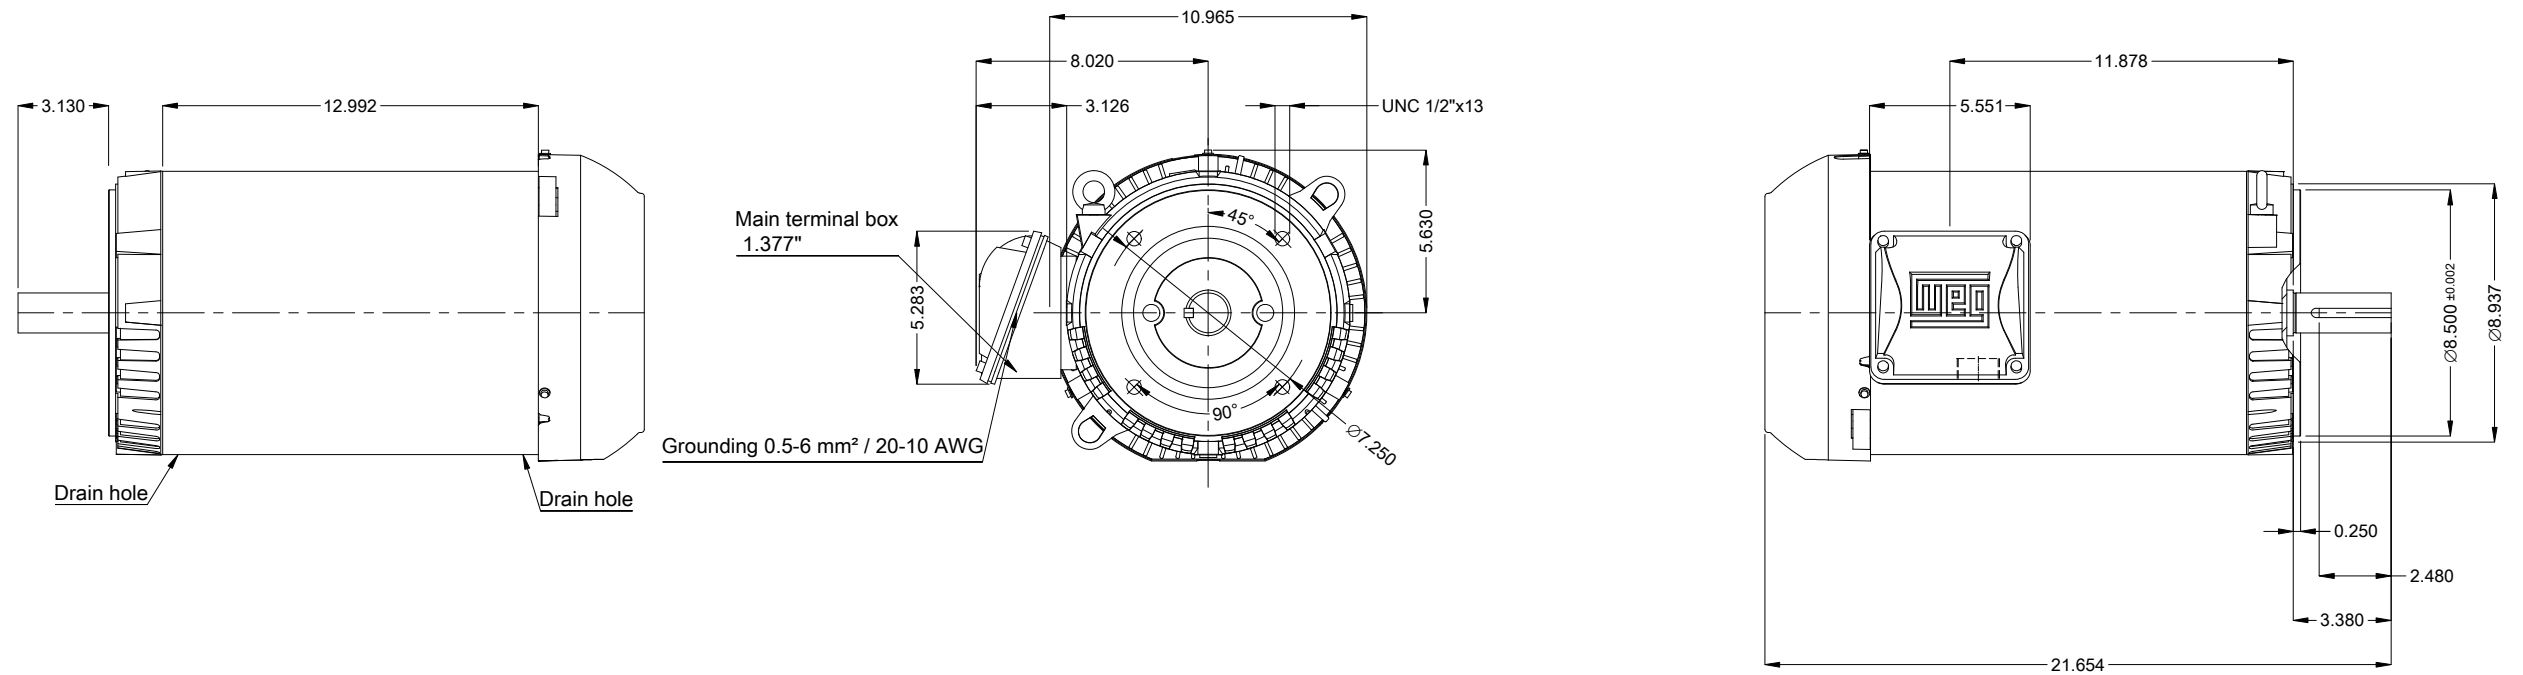

15 HP 02 Poles 60 Hz										A
V.J. PAMENSKY CANADA INC.										
						Scale			2 : 13	
						PIRWBUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER	 THREE PH. MOTOR ROLLED STEEL NEMA PREM. EFF. FRAME 213/5TC IP55 TEFC				PREVIEW				
CHECKED						WDD 00				
RELEASED										
REL. DATE						SHEET 1 / 1				