

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 12984344

Frame	: 254/6TC	Locked rotor time	: 54s (cold) 30s (hot)
Output	: 7.5 HP (5.5 kW)	Temperature rise	: 80 K
Poles	: 8	Duty cycle	: Cont.(S1)
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.
Rated current	: 9.02 A	Protection degree	: IP55
L. R. Amperes	: 47.8 A	Cooling method	: IC411 - TEFC
LRC	: 5.3x(Code H)	Mounting	: F-1
No load current	: 5.92 A	Rotation ¹	: Both (CW and CCW)
Rated speed	: 880 rpm	Noise level ²	: 54.0 dB(A)
Slip	: 2.22 %	Starting method	: Direct On Line
Rated torque	: 6.19 kgfm	Approx. weight ³	: 125 kg
Locked rotor torque	: 200 %		
Breakdown torque	: 250 %		
Insulation class	: F		
Service factor	: 1.25		
Moment of inertia (J)	: 0.1867 kgm ²		
Design	: B		

Output	50%	75%	100%	Foundation loads	
Efficiency (%)	85.5	87.5	87.5	Max. traction	: 180 kgf
Power Factor	0.50	0.63	0.70	Max. compression	: 306 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
13.7	11.9	12.0	8.0	6.0	4.8	3.7

		<u>Drive end</u>	<u>Non drive end</u>
Bearing type	:	6309 C3	6209 C3
Sealing	:	V'Ring	V'Ring
Lubrication interval	:	20000 h	20000 h
Lubricant amount	:	13 g	9 g
Lubricant type	:	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		1 / 2		
Date	17/09/2025			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 12984344


LOAD PERFORMANCE CURVE

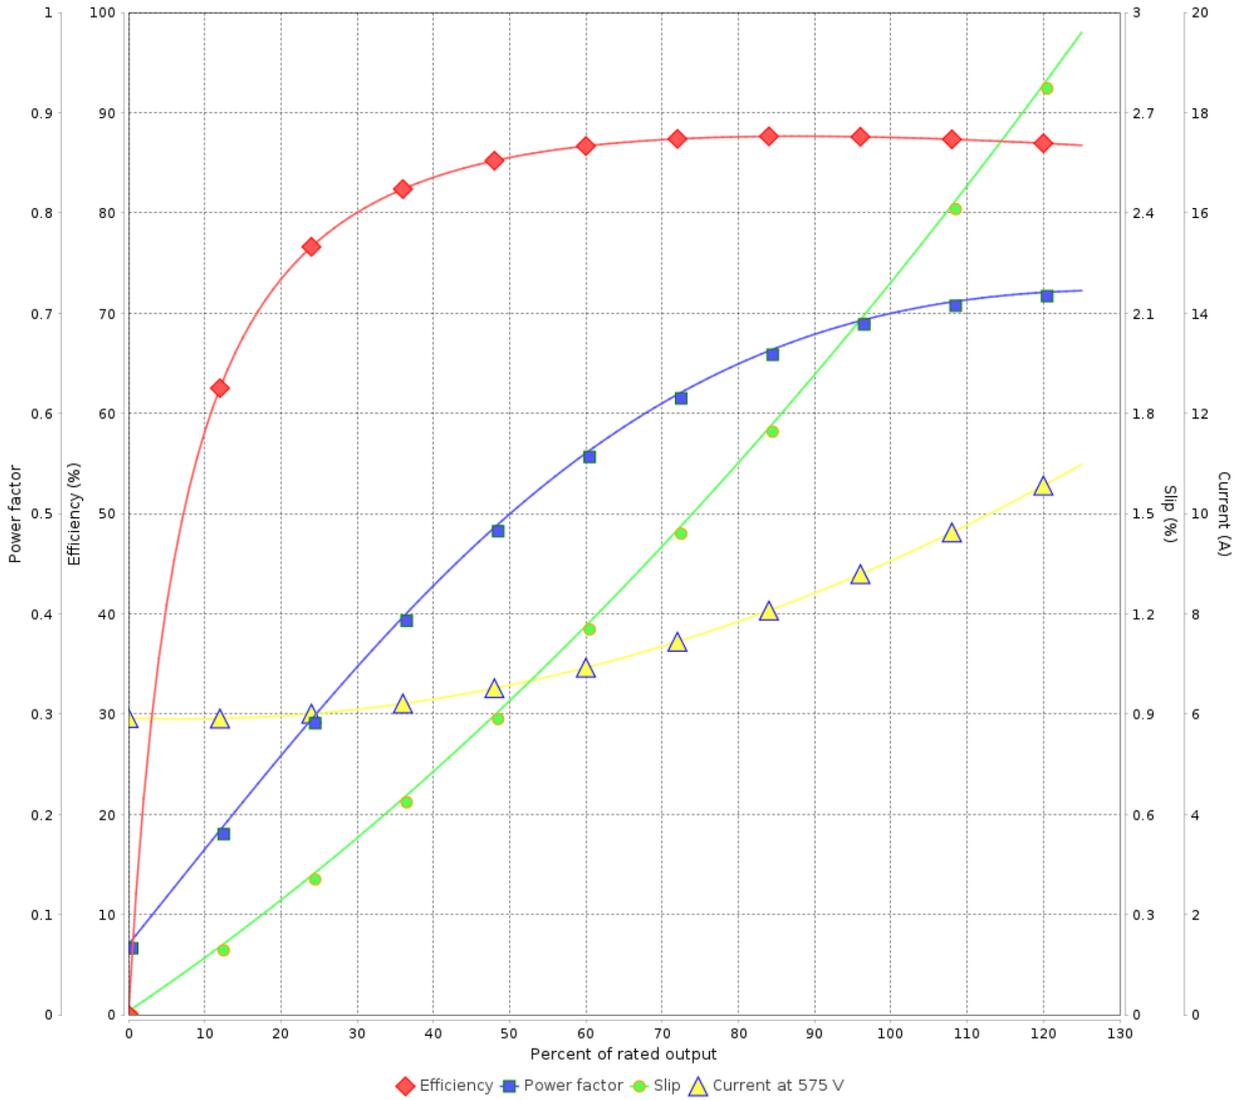


Performance : 575 V 60 Hz 8P

Rated current	: 9.02 A	Moment of inertia (J)	: 0.1867 kgm ²
LRC	: 5.3	Duty cycle	: Cont.(S1)
Rated torque	: 6.19 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.25
Breakdown torque	: 250 %	Temperature rise	: 80 K
Rated speed	: 880 rpm	Design	: B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	17/09/2025			

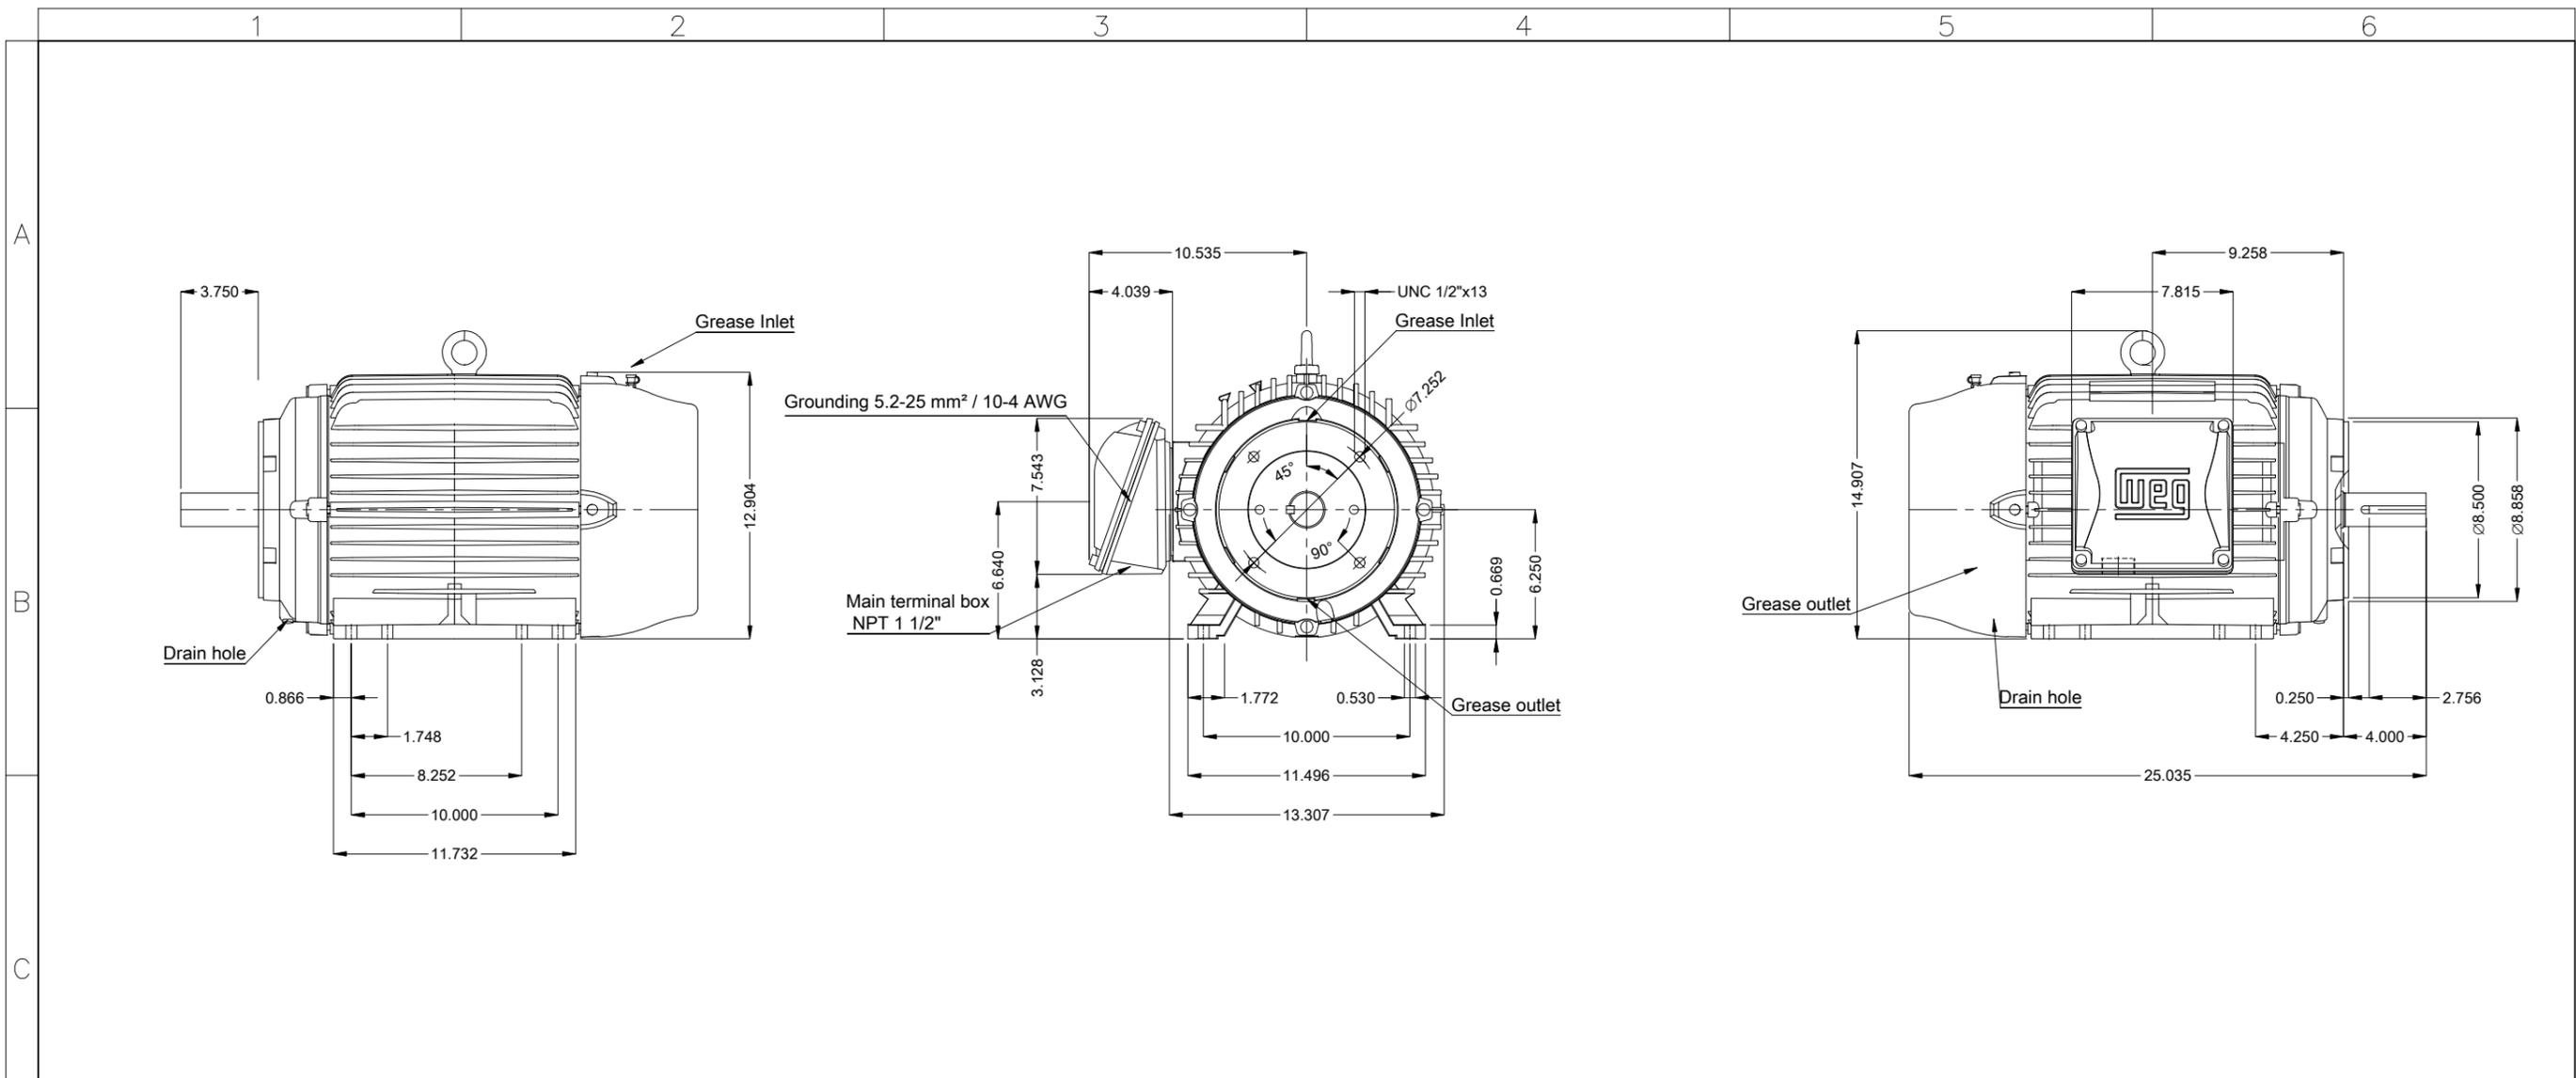

Without vertical jackscrews
 Color RAL 5009
 Painting plan 203A
 Mounting NEMA F-1
 Mounting B34D

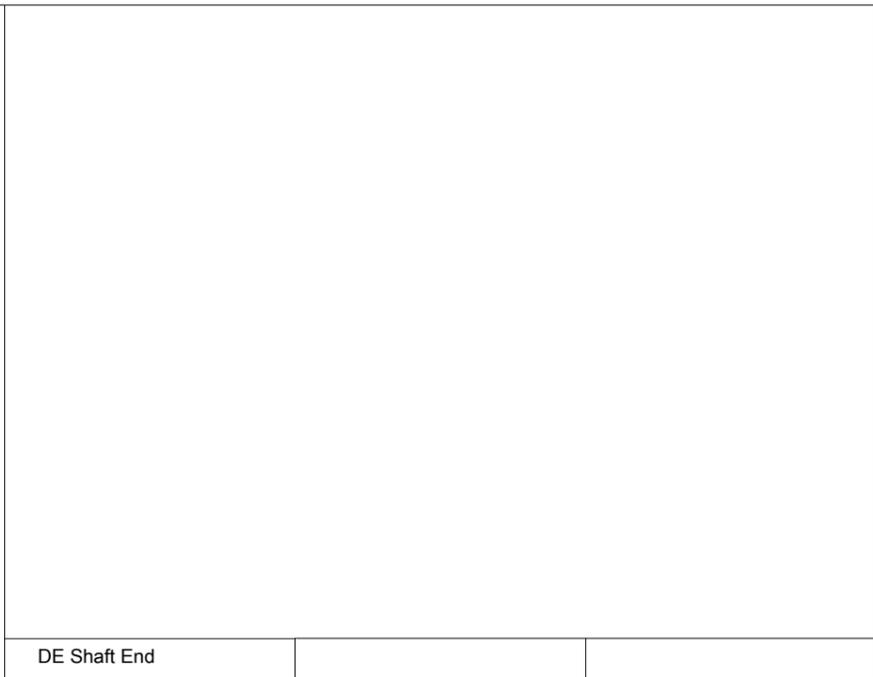

7.5 HP 08 Poles 60 Hz										A	
Scale 1 : 8											
HYBRISUSER										00	
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 NEMA PREM. EFF.					PREVIEW				
CHECKED		FRAME 254/6TC IP55 TEFC					WDD	00			
RELEASED							SHEET	1 / 1			
REL. DATE											

Without vertical jackscrews
 Color RAL 5009
 Painting plan 203A
 Mounting NEMA F-1
 Mounting B34D



7.5 HP 08 Poles 60 Hz										A	
Scale 1 : 8											
HYBRISUSER										00	
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 NEMA PREM. EFF.					PREVIEW				
CHECKED		FRAME 254/6TC IP55 TEFC					WDD	00			
RELEASED							SHEET	1 / 1			
REL. DATE											