

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer	:				
Product line	: Jet Pump - C type Three-Phase	Product code :	14123144		
Frame	: 56C	Cooling method	: IC01 - ODP		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation ¹	: CCW		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight ³	: 19.0 kg		
Design	: A	Moment of inertia (J)	: 0.0054 kgm ²		
Output [HP]	3				
Poles	2				
Frequency [Hz]	60				
Rated voltage [V]	575				
Rated current [A]	2.87				
L. R. Amperes [A]	23.0				
LRC [A]	8.0x(Code J)				
No load current [A]	1.04				
Rated speed [RPM]	3480				
Slip [%]	3.33				
Rated torque [kgfm]	0.626				
Locked rotor torque [%]	229				
Breakdown torque [%]	300				
Service factor	1.15				
Temperature rise	80 K				
Locked rotor time	16s (cold) 9s (hot)				
Noise level ²	62.0 dB(A)				
Efficiency (%)	25%				
	50%	84.0			
	75%	85.5			
	100%	85.5			
Power Factor	25%				
	50%	0.76			
	75%	0.86			
	100%	0.90			
Bearing type	: <u>Drive end</u> 6203 2RS	<u>Non drive end</u> 6202 2RS	Foundation loads		
Sealing	: Without	Without	Max. traction	: 50 kgf	
	Bearing Seal	Bearing Seal	Max. compression	: 69 kgf	
Lubrication interval	: -	-			
Lubricant amount	: -	-			
Lubricant type	: Mobil Polyrex EM				
Notes					
<p>This revision replaces and cancel the previous one, which must be eliminated.</p> <p>(1) Looking the motor from the shaft end.</p> <p>(2) Measured at 1m and with tolerance of +3dB(A).</p> <p>(3) Approximate weight subject to changes after manufacturing process.</p> <p>(4) At 100% of full load.</p>			<p>These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.</p>		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	11/05/2022			1 / 2	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Jet Pump - C type Three-Phase Product code : 14123144

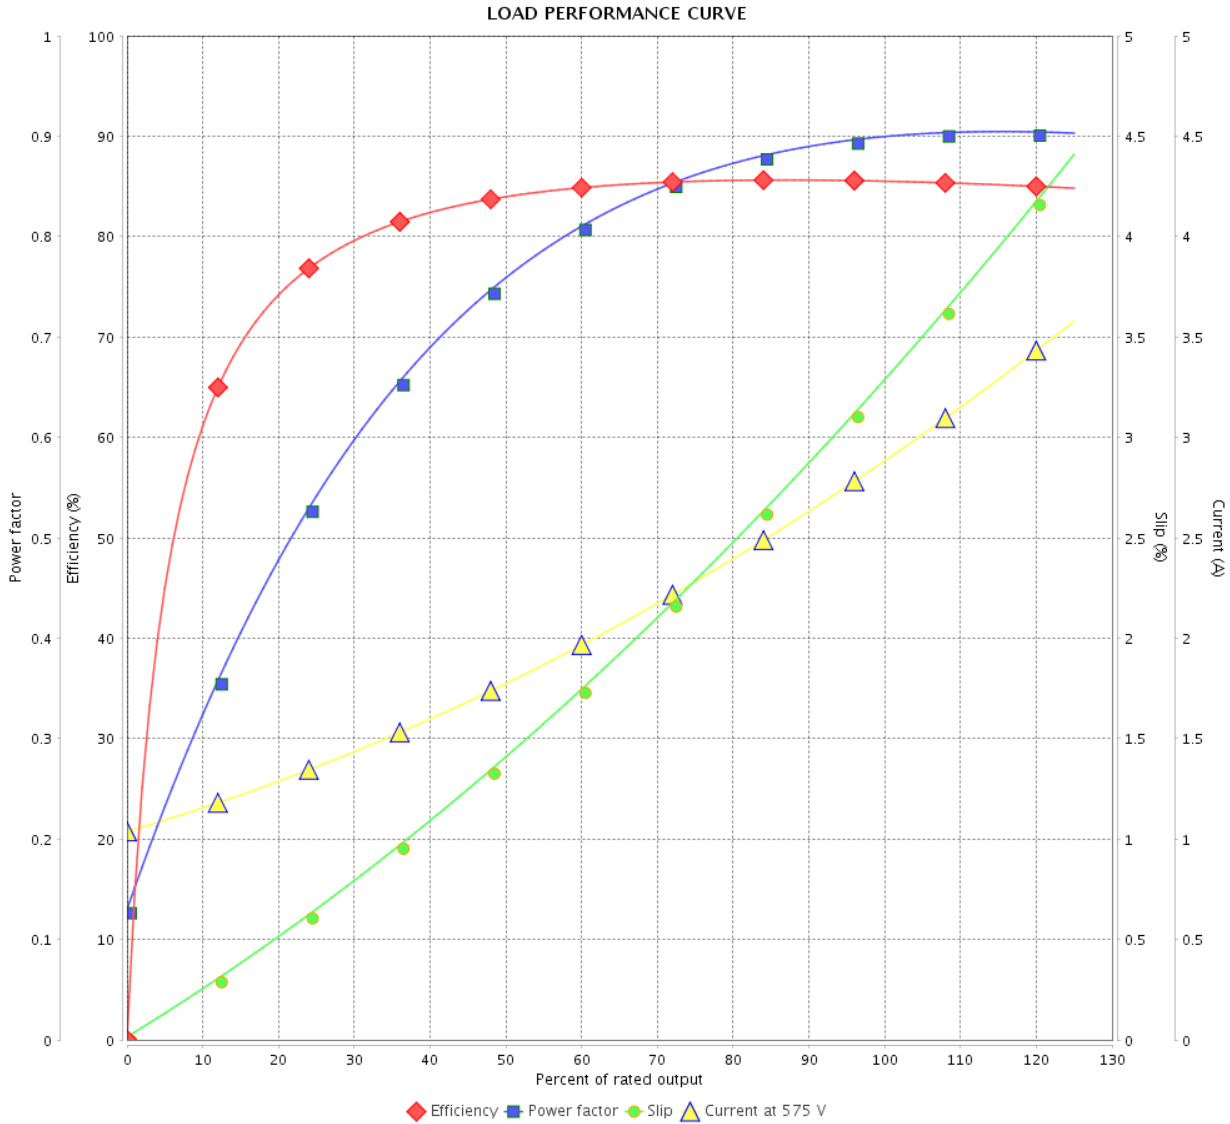

Performance : 575 V 60 Hz 2P

Rated current	: 2.87 A	Moment of inertia (J)	: 0.0054 kgm ²
LRC	: 8.0	Duty cycle	: Cont.(S1)
Rated torque	: 0.626 kgfm	Insulation class	: F
Locked rotor torque	: 229 %	Service factor	: 1.15
Breakdown torque	: 300 %	Temperature rise	: 80 K
Rated speed	: 3480 rpm	Design	: A

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	11/05/2022			

