

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :						
Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 14193742						
Frame	: 143/5T			Locked rotor time	: 32s (cold) 18s (hot)	
Output	: 1 HP (0.75 kW)			Temperature rise	: 80 K	
Poles	: 4			Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz			Ambient temperature	: -20°C to +40°C	
Rated voltage	: 575 V			Altitude	: 1000 m.a.s.l.	
Rated current	: 1.18 A			Protection degree	: IP55	
L. R. Amperes	: 10.1 A			Cooling method	: IC411 - TEFC	
LRC	: 8.6x(Code M)			Mounting	: F-1	
No load current	: 0.752 A			Rotation ¹	: Both (CW and CCW)	
Rated speed	: 1760 rpm			Noise level ²	: 51.0 dB(A)	
Slip	: 2.22 %			Starting method	: Direct On Line	
Rated torque	: 0.412 kgfm			Approx. weight ³	: 24.6 kg	
Locked rotor torque	: 290 %					
Breakdown torque	: 350 %					
Insulation class	: F					
Service factor	: 1.25					
Moment of inertia (J)	: 0.0049 kgm ²					
Design	: B					
Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	78.4	80.0	84.0	85.5	Max. traction	: 29 kgf
Power Factor	0.31	0.55	0.68	0.75	Max. compression	: 53 kgf
Losses at normative operating points (speed;torque), in percentage of rated output power						
P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
15.9	12.8	12.5	10.1	7.0	5.8	4.3
		<u>Drive end</u>		<u>Non drive end</u>		
Bearing type	:	6205 ZZ		6204 ZZ		
Sealing	:	V'Ring		Lip Seal		
Lubrication interval	:	-		-		
Lubricant amount	:	-		-		
Lubricant type	:	Mobil Polyrex EM				
Notes:						
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary			Performed	Checked	Date
Performed by						
Checked by					Page	Revision
Date	15/01/2024				1 / 3	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Brake information

Voltage: 525-575 V
Brake Torque: 1.63 kgfm

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	15/01/2024		2 / 3	


LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : W22 Brake Motor NEMA Premium Efficiency Three-Phase Product code : 14193742

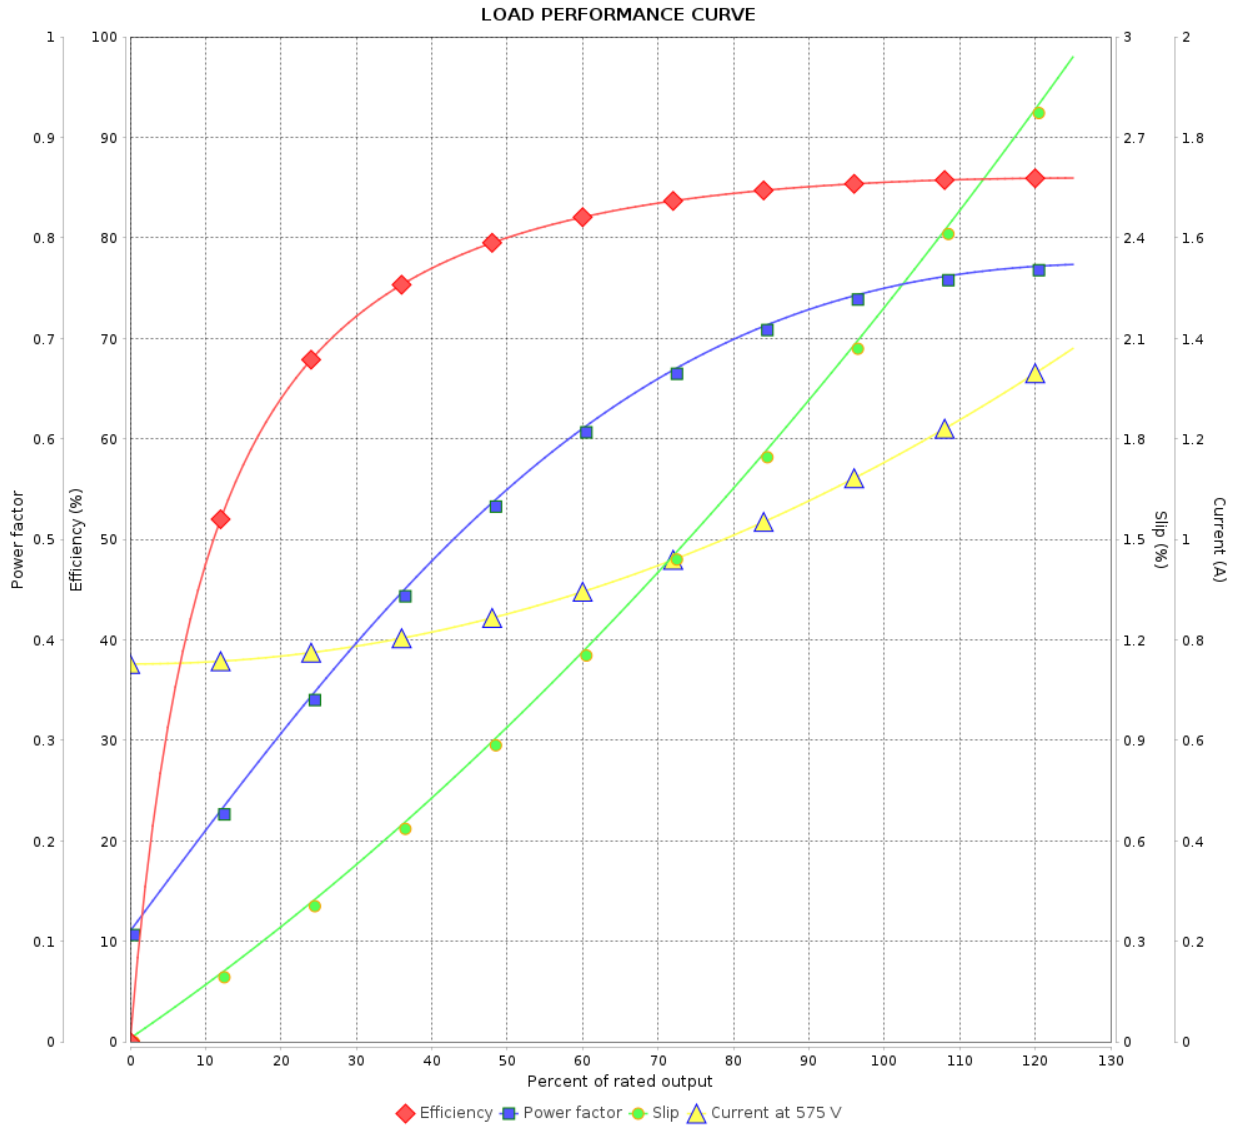


Performance : 575 V 60 Hz 4P

Rated current : 1.18 A
 LRC : 8.6
 Rated torque : 0.412 kgfm
 Locked rotor torque : 290 %
 Breakdown torque : 350 %
 Rated speed : 1760 rpm


Moment of inertia (J) : 0.0049 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.25
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

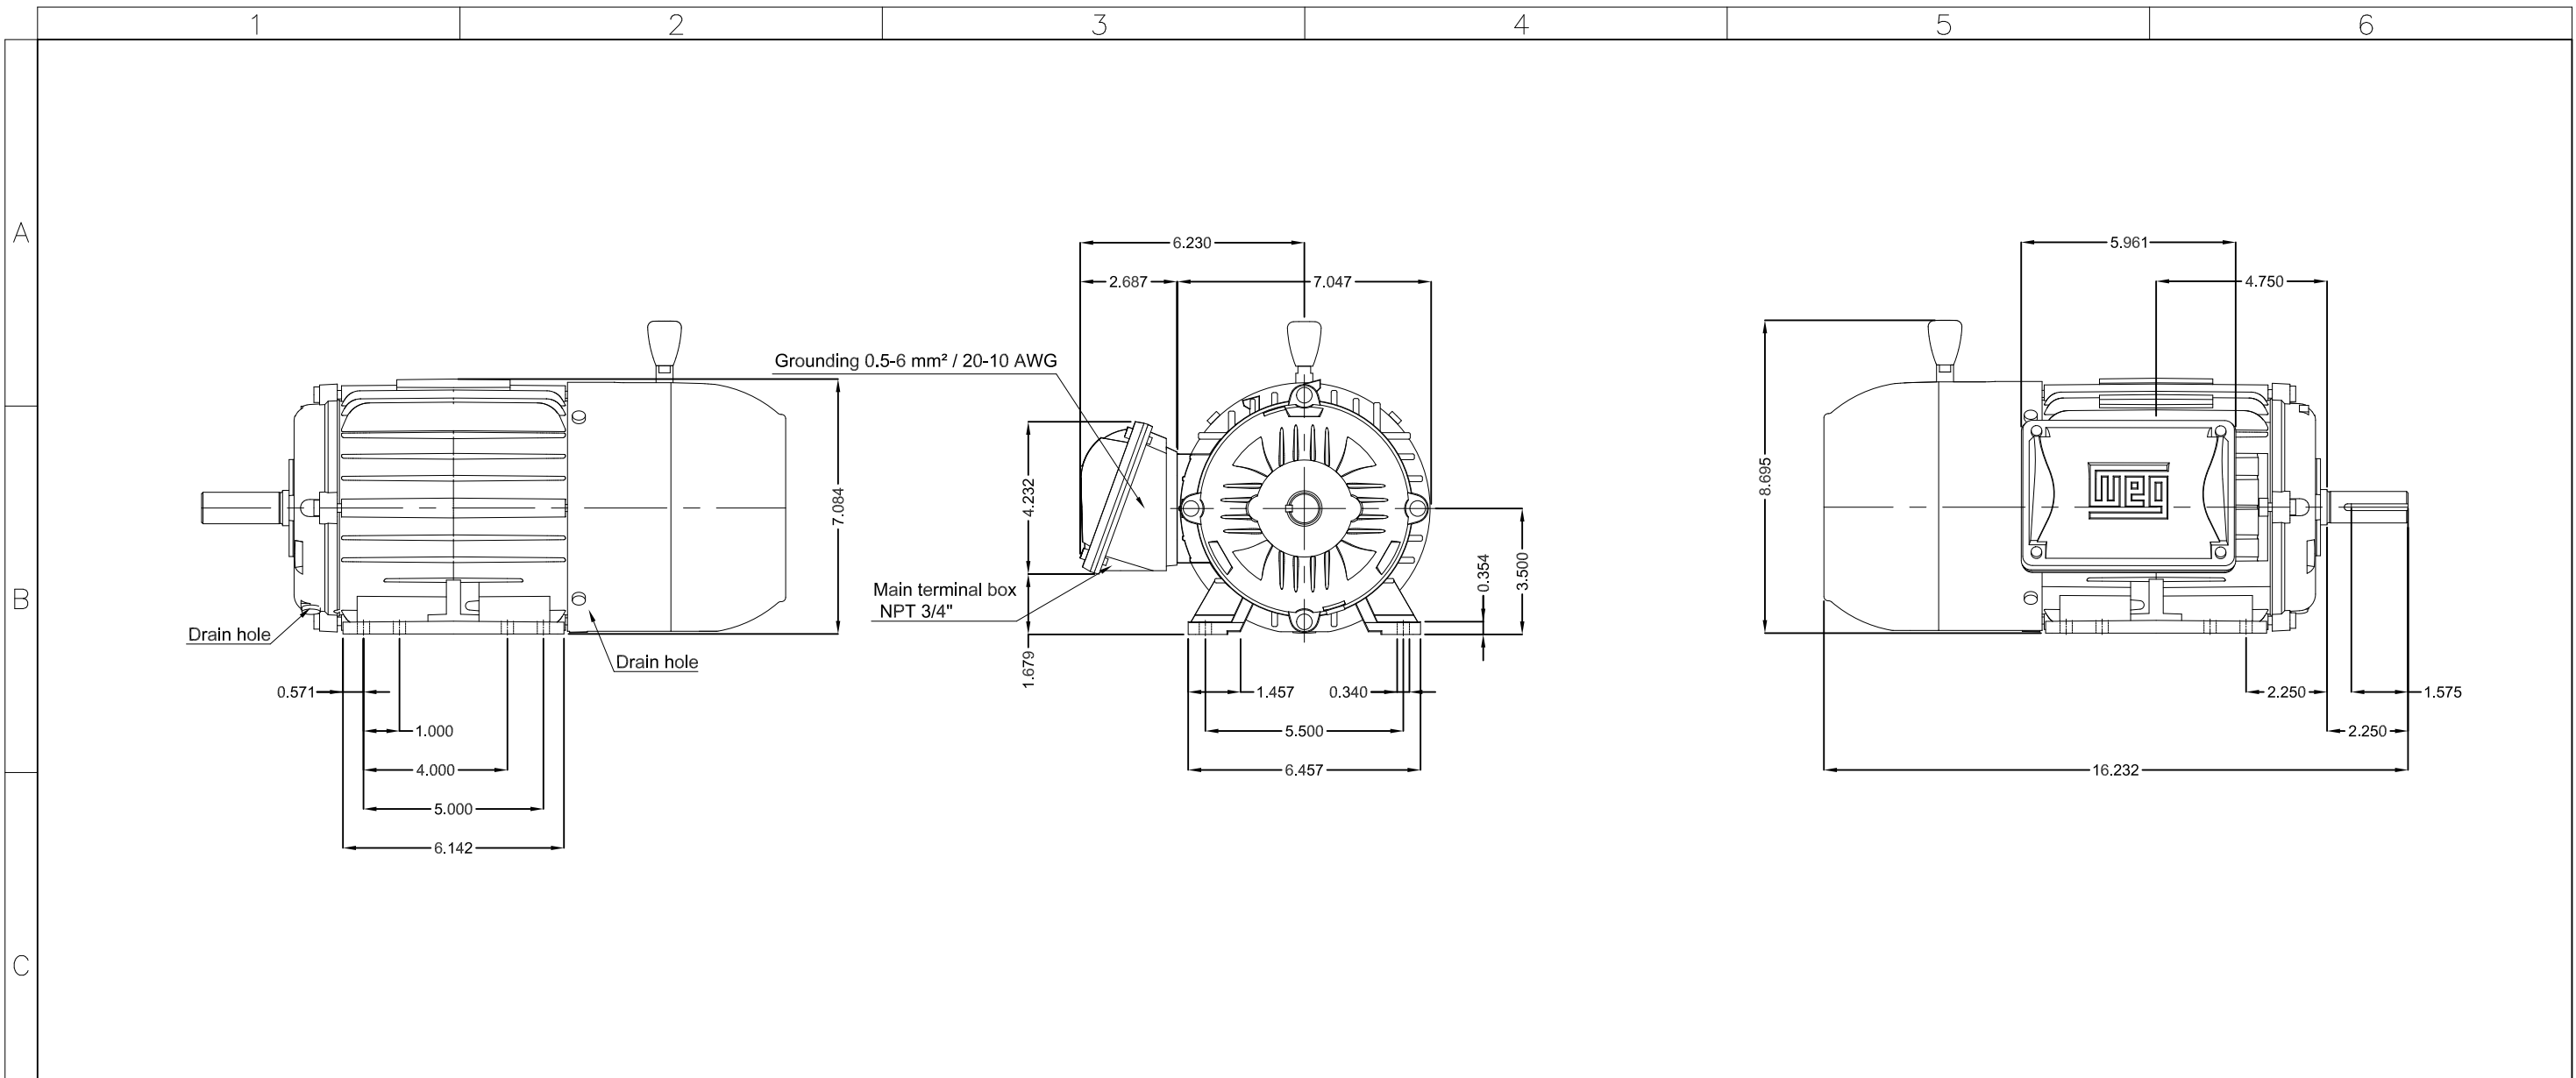

D										
	1 HP 04 Poles 60 Hz A									
E										
	HYBRISUSER 00									

Brake voltage 525-575 V
 With brake 10 (16 Nm)
 Color RAL 5009
 Painting plan 207A
 Mounting NEMA F-1
 Mounting B3R(D)



ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR W22 BRAKE MOTOR NEMA PREM. EFF. FRAME 143/5T IP55 TEFC				EXECUTED				
CHECKED										
RELEASED										
REL. DATE										

PREVIEW
 WDD | 00
 SHEET /