

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W22

Frame	: 213/5TC	Locked rotor time	: 6 s (hot) 11 s (cold)
Output	: 5 HP (3.7 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 208-230 V	Altitude	: 3280 ft
Rated current	: 23.5-21.3 A	Protection degree	: IP55
L. R. Amperes	: 172-155 A	Cooling method	: IC411 - TEFC
LRC	: 7.3	Mounting	: F-1
No load current	: 7.59-8.80 A	Rotation ¹	: Both
Rated speed	: 1750 rpm	Noise level ²	: 63.0 dB(A)
Slip	: 2.78 %	Vibration class	: NOT APPLICABLE
Rated torque	: 14.8 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 370 %	Coupling	: Direct
Pull up torque	: 315 %	Approx. weight ³	: 160 lb
Breakdown torque	: 250 %	Painting plan	: 207A
Insulation class	: F	Color	: RAL 5009
Service factor	: 1.15		
Moment of inertia (J)	: 0.7119 sq.ft.lb		

Output	50%	75%	100%
Efficiency (%)	71.0	77.9	80.5
Power Factor	0.87	0.92	0.94

Load type	: -
Load torque	: -
Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end
Bearing type	6308-ZZ	6206-ZZ
Lubrication interval	-	-
Lubricant amount	-	-
Lubricant type	POLYUREA BASED GREASE	

Foundation loads	
Max. traction	: -
Max. compression	: -




Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated.
 (1) Looking the motor from the shaft end.
 (2) Measured at 1m and with tolerance of +3dB(A).
 (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq			1856275275	
Checked by	AUTOMATICO			Page	Rev.
Date	03/06/2026			1 / 1	0

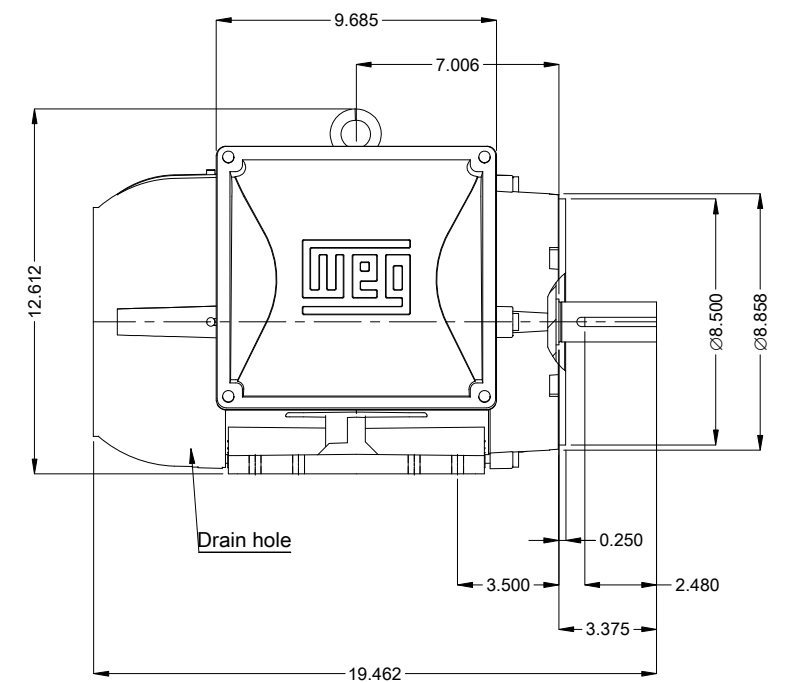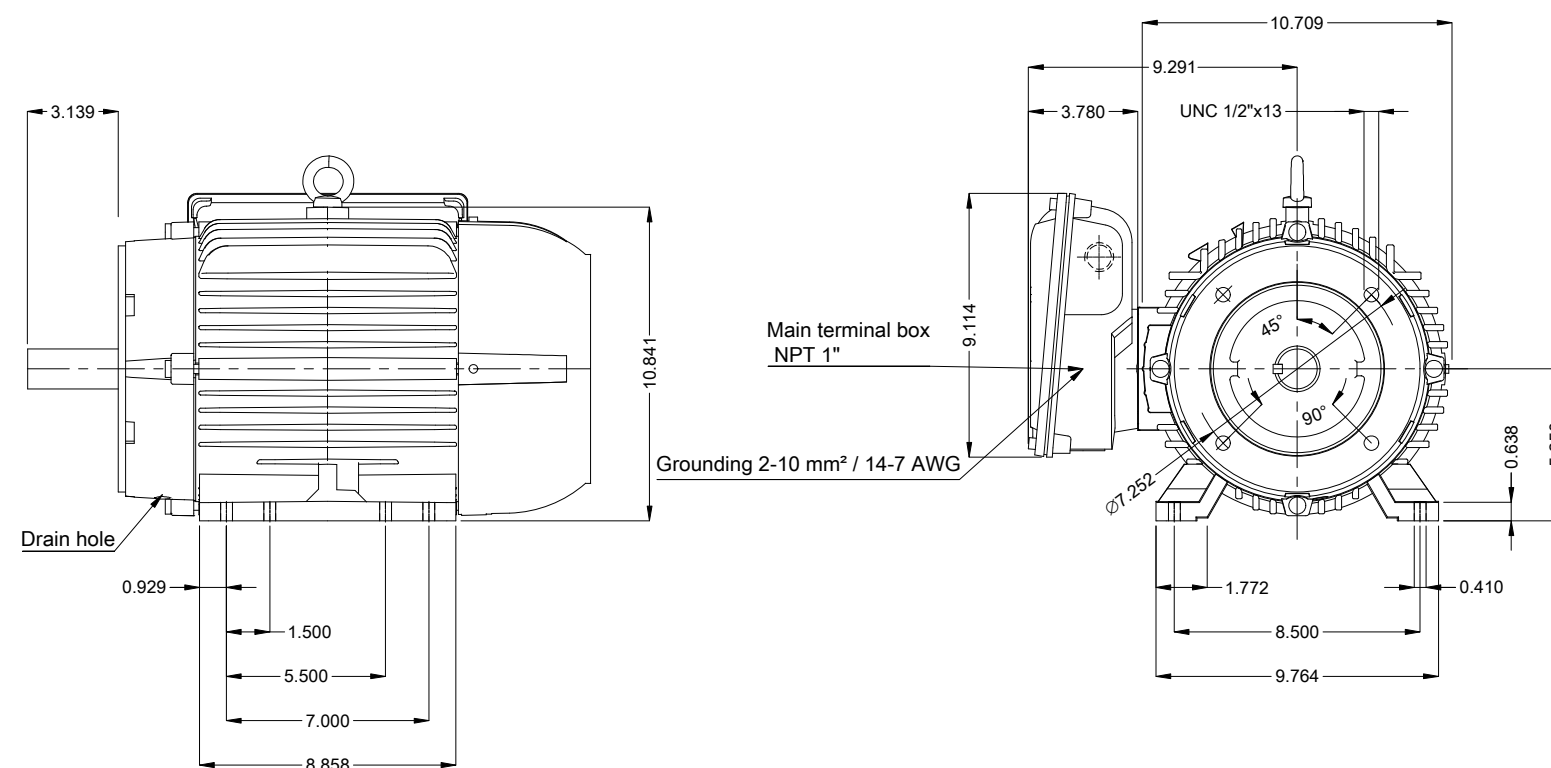

Mounting NEMA F-1
Mounting B34D

5 HP 04 Poles 60 Hz										A
V.J. PAMENSKY CANADA INC.										
						Scale		2 : 13		
						PIRWBUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	PIRWBUSER		SINGLE PH. MOTOR W22				PREVIEW			
CHECKED			FRAME 213/5TC IP55 TEFC							
RELEASED							WDD	00		
REL. DATE							SHEET	1 / 1		