

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : Special Motor

Frame	: 143/5TCZ	Locked rotor time	: 16 s (hot) 28 s (cold)
Output	: 2 HP (1.5 kW)	Temperature rise	: 105 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230/460 V	Altitude	: 3280 ft
Rated current	: 6.05/3.02 A	Protection degree	: IP55
L. R. Amperes	: 49.6/24.8 A	Cooling method	: IC410 - TENV
LRC	: 8.2 Code L	Mounting	: F-1/B34R(D)
No load current	: 3.66/1.83 A	Rotation ¹	: Both
Rated speed	: 1750 rpm	Noise level ²	: -
Slip	: 2.78 %	Vibration class	: A
Rated torque	: 6.00 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 350.0 %	Approx. weight ³	: 50.5 lb
Pull up torque	: 295.0 %	Painting plan	: 207N
Breakdown torque	: 350.0 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: H	Design	: B
Service factor	: 1.15		
Moment of inertia (J)	: 0.0000 sq.ft.lb		

Output	50%	75%	100%
Efficiency (%)	85.5	86.5	86.5
Power Factor	0.48	0.62	0.72

Load type	: -
Load torque	: -
Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end
Bearing type #1	6205-ZZ	6203-ZZ
Bearing type #2	-	-
Lubrication interval	-	-
Lubricant amount #1	-	-
Lubricant amount #2	-	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	:
Max. compression	:

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	janinnes		1864438988		
Checked by	AUTOMATICO		Page	Rev.	
Date	23/06/2026		1 / 2	0	

DATA SHEET


Three Phase Induction Motor - Squirrel Cage



Customer		: V.J. PAMENSKY CANADA INC.		
Product line		: Special Motor		
Thermal protection				
ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155°C

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7	
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12	
	Noise	: MG1 - Part 9			
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.		
Rev.	Changes Summary		Rev.	Checked	Date
Performed by	janinnes		1864438988		
Checked by	AUTOMATICO		Page	Rev.	
Date	23/06/2026		2 / 2	0	

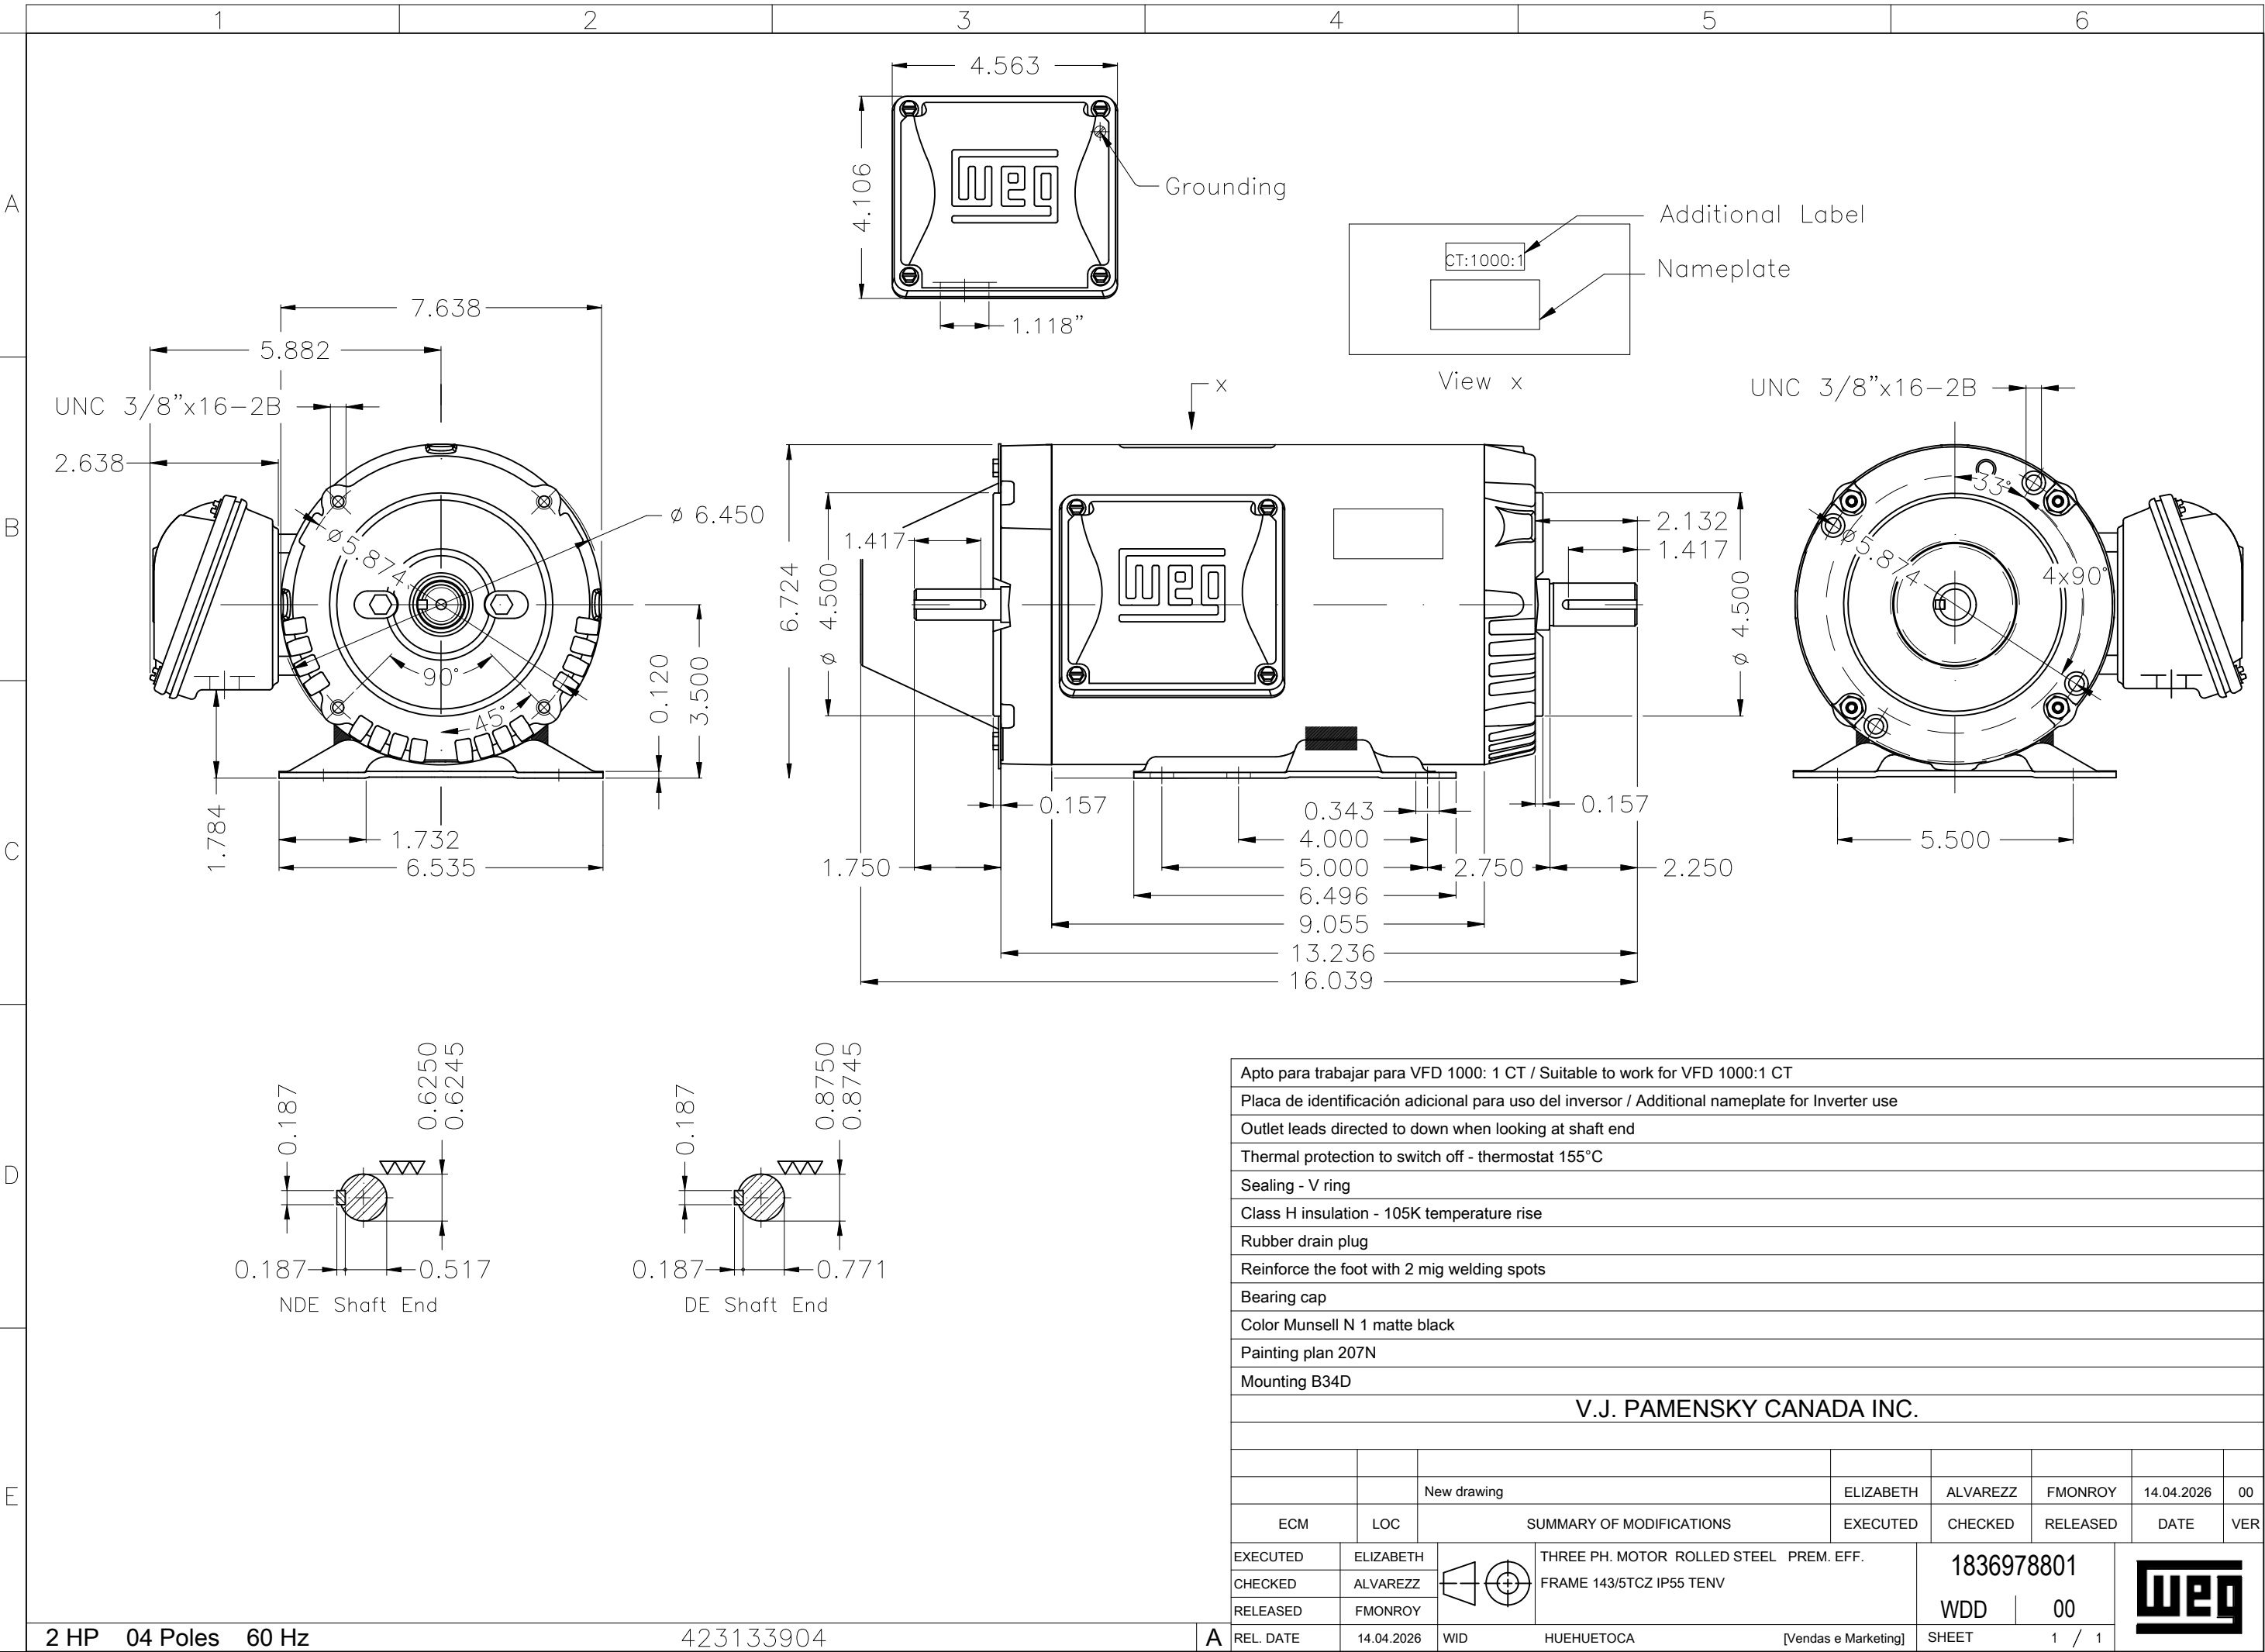

A

B

C

D

E

PRELIMINARY DOCUMENT - Not to be used for installation purposes.

Dimensions in inches

XME A3