

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - ODP - High Efficiency JM

Product code : 19124355

Frame	: 254/6JM	Locked rotor time	: 9 s (hot) 16 s (cold)
Output	: 20 HP (15 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 575 V	Altitude	: 3280 ft
Rated current	: 19.0 A	Protection degree	: IP21
L. R. Amperes	: 114 A	Cooling method	: IC01 - ODP
LRC	: 6.0	Mounting	: W-6/V17R(D)
No load current	: 7.30 A	Rotation ¹	: Both
Rated speed	: 3520 rpm	Noise level ²	: 70.0 dB(A)
Slip	: 2.22 %	Vibration class	: A
Rated torque	: 29.4 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 180 %	Approx. weight ³	: 151 lb
Pull up torque	: 135 %	Painting plan	: 207N
Breakdown torque	: 240 %	Color	: RAL 3002
Insulation class	: F	Design	: B
Service factor	: 1.15		
Moment of inertia (J)	: 0.6977 sq.ft.lb		

Output	50%	75%	100%	Load type	: -
Efficiency (%)	88.5	89.5	90.2	Load torque	: -
Power Factor	0.75	0.84	0.88	Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end	Foundation loads
Bearing type #1			Max. traction
Bearing type #2	-	-	Max. compression
Lubrication interval	-	-	
Lubricant amount #1	-	-	
Lubricant amount #2	-	-	
Lubricant type	MOBIL POLYREX EM		

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1871636883		
Checked by	AUTOMATICO		Page	Rev.	
Date	09/07/2026		1 / 2	0	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - ODP - High Efficiency JM Product code : 19124355



Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		


This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.	These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.
---	---

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1871636883		
Checked by	AUTOMATICO		Page	Rev.	
Date	09/07/2026		2 / 2	0	

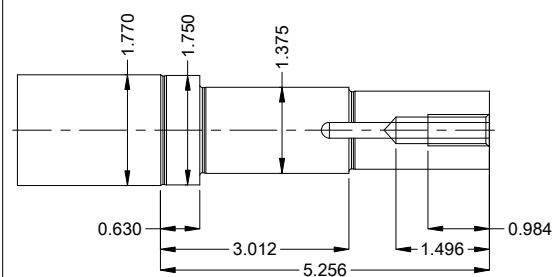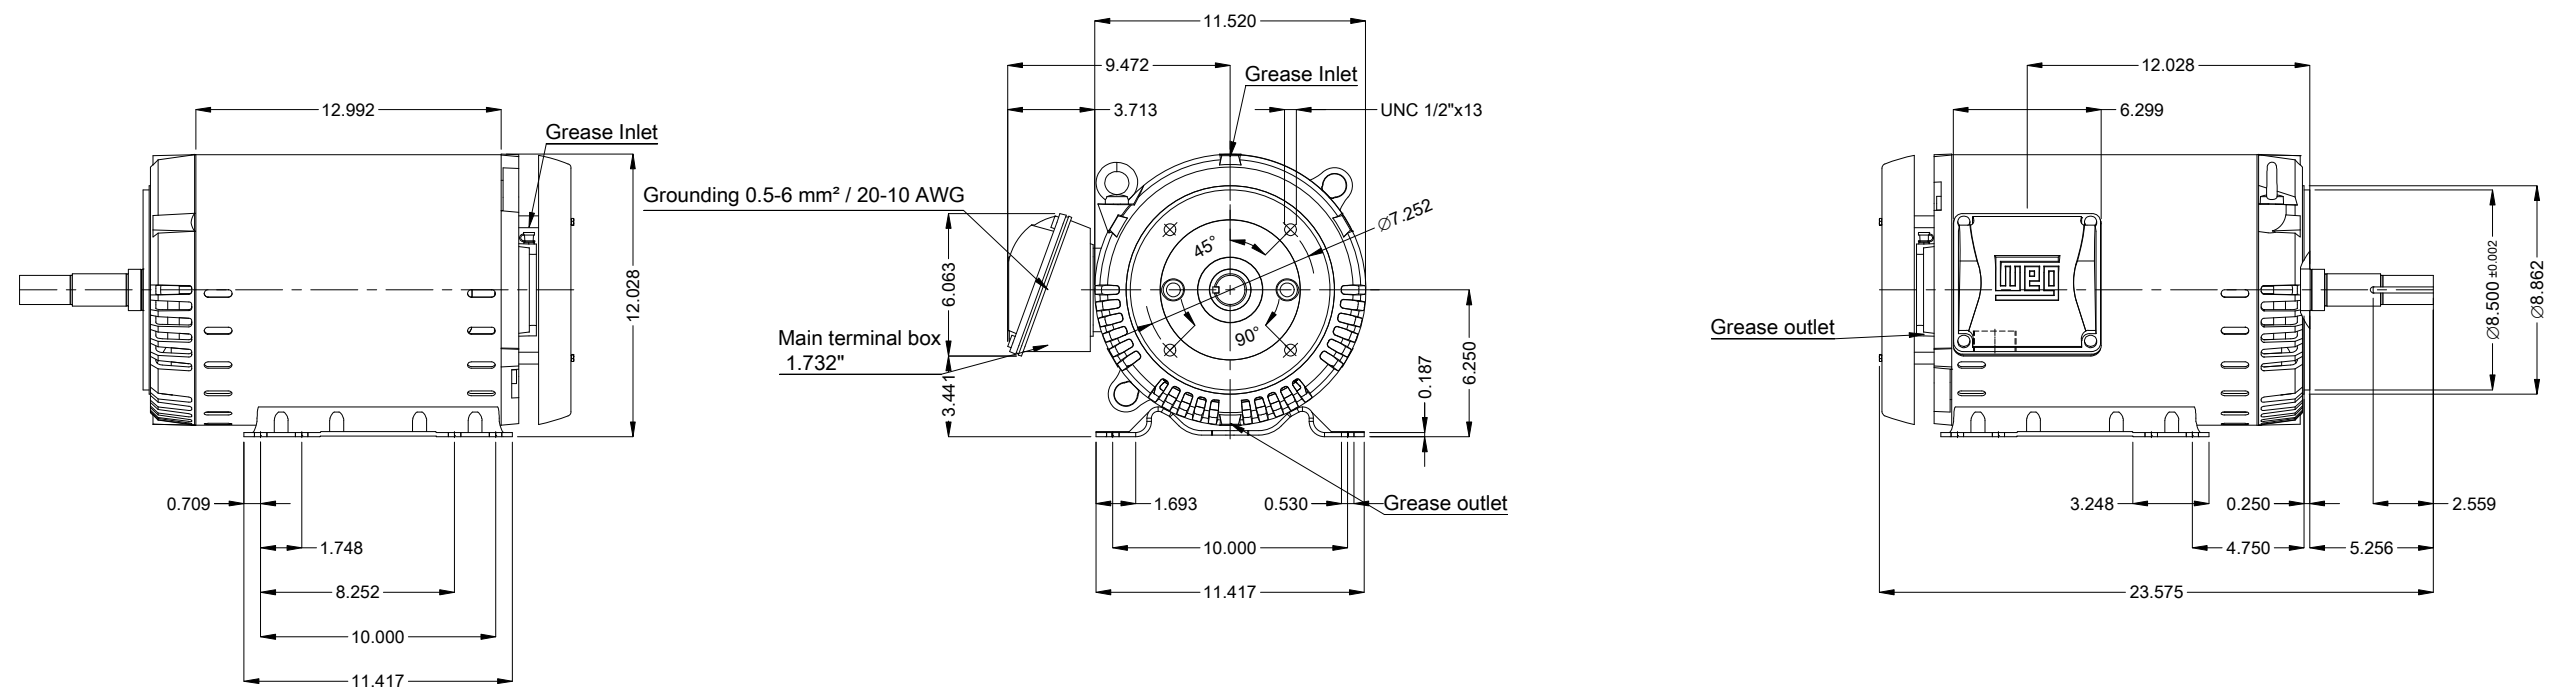

With drip cover
Color RAL 3002
Painting plan 207N
Mounting MARKET W-6/V17R(D)
Mounting W-6/V17R(D)

DE Shaft End



EUNC 1/2"-13 WEG WPR-7309

20 HP 02 Poles 60 Hz

A

Scale 1 : 8

DATAVIEWERUSER

0

ECM

LOC

SUMMARY OF MODIFICATIONS

EXECUTED


CHECKED

RELEASED

DATE	VER
------	-----

EXECUTED

DATAVIEWERUSER



THREE PH. MOTOR ROLLED STEEL JM HIGH EFF.

FRAME 254/6JM IP21 ODP

PREVIEW

WDD

00



SHEET

1	/	1
---	---	---