

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC Farm Duty - Standard Efficiency Product code : 19226132

Frame	: 56C	Locked rotor time	: 10 s (hot) 18 s (cold)
Output	: 0.75 HP (0.55 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 115/230 V	Altitude	: 3280 ft
Rated current	: 10.6/5.30 A	Protection degree	: IP55
L. R. Amperes	: 67.8/33.9 A	Cooling method	: IC411 - TEFC
LRC	: 6.4	Mounting	: F-1/B14R(D)
No load current	: 8.00/4.00 A	Rotation ¹	: Both
Rated speed	: 1745 rpm	Noise level ²	: 54.0 dB(A)
Slip	: 3.06 %	Vibration class	: A
Rated torque	: 2.23 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 300 %	Approx. weight ³	: 28.7 lb
Pull up torque	: 255 %	Painting plan	: 207N
Breakdown torque	: 270 %	Color	: RAL 3003
Insulation class	: F	Design	: N
Service factor	: 1.15		
Moment of inertia (J)	: 0.0783 sq.ft.lb		

Output	50%	75%	100%	Load type	: -
Efficiency (%)	57.0	65.0	68.5	Load torque	: -
Power Factor	0.47	0.58	0.67	Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end	Foundation loads	
Bearing type	6204-2RS	6202-2RS	Max. traction	: -
Lubrication interval	-	-	Max. compression	: -
Lubricant amount	-	-		
Lubricant type	MOBIL POLYREX EM			

Notes
See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1847854845		
Checked by	AUTOMATICO		Page	Rev.	
Date	13/05/2026		1 / 2	0	

DATA SHEET

Single Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC Farm Duty - Standard Efficiency Product code : 19226132


Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.	These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.
---	---

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1847854845		
Checked by	AUTOMATICO		Page	Rev.	
Date	13/05/2026		2 / 2	0	

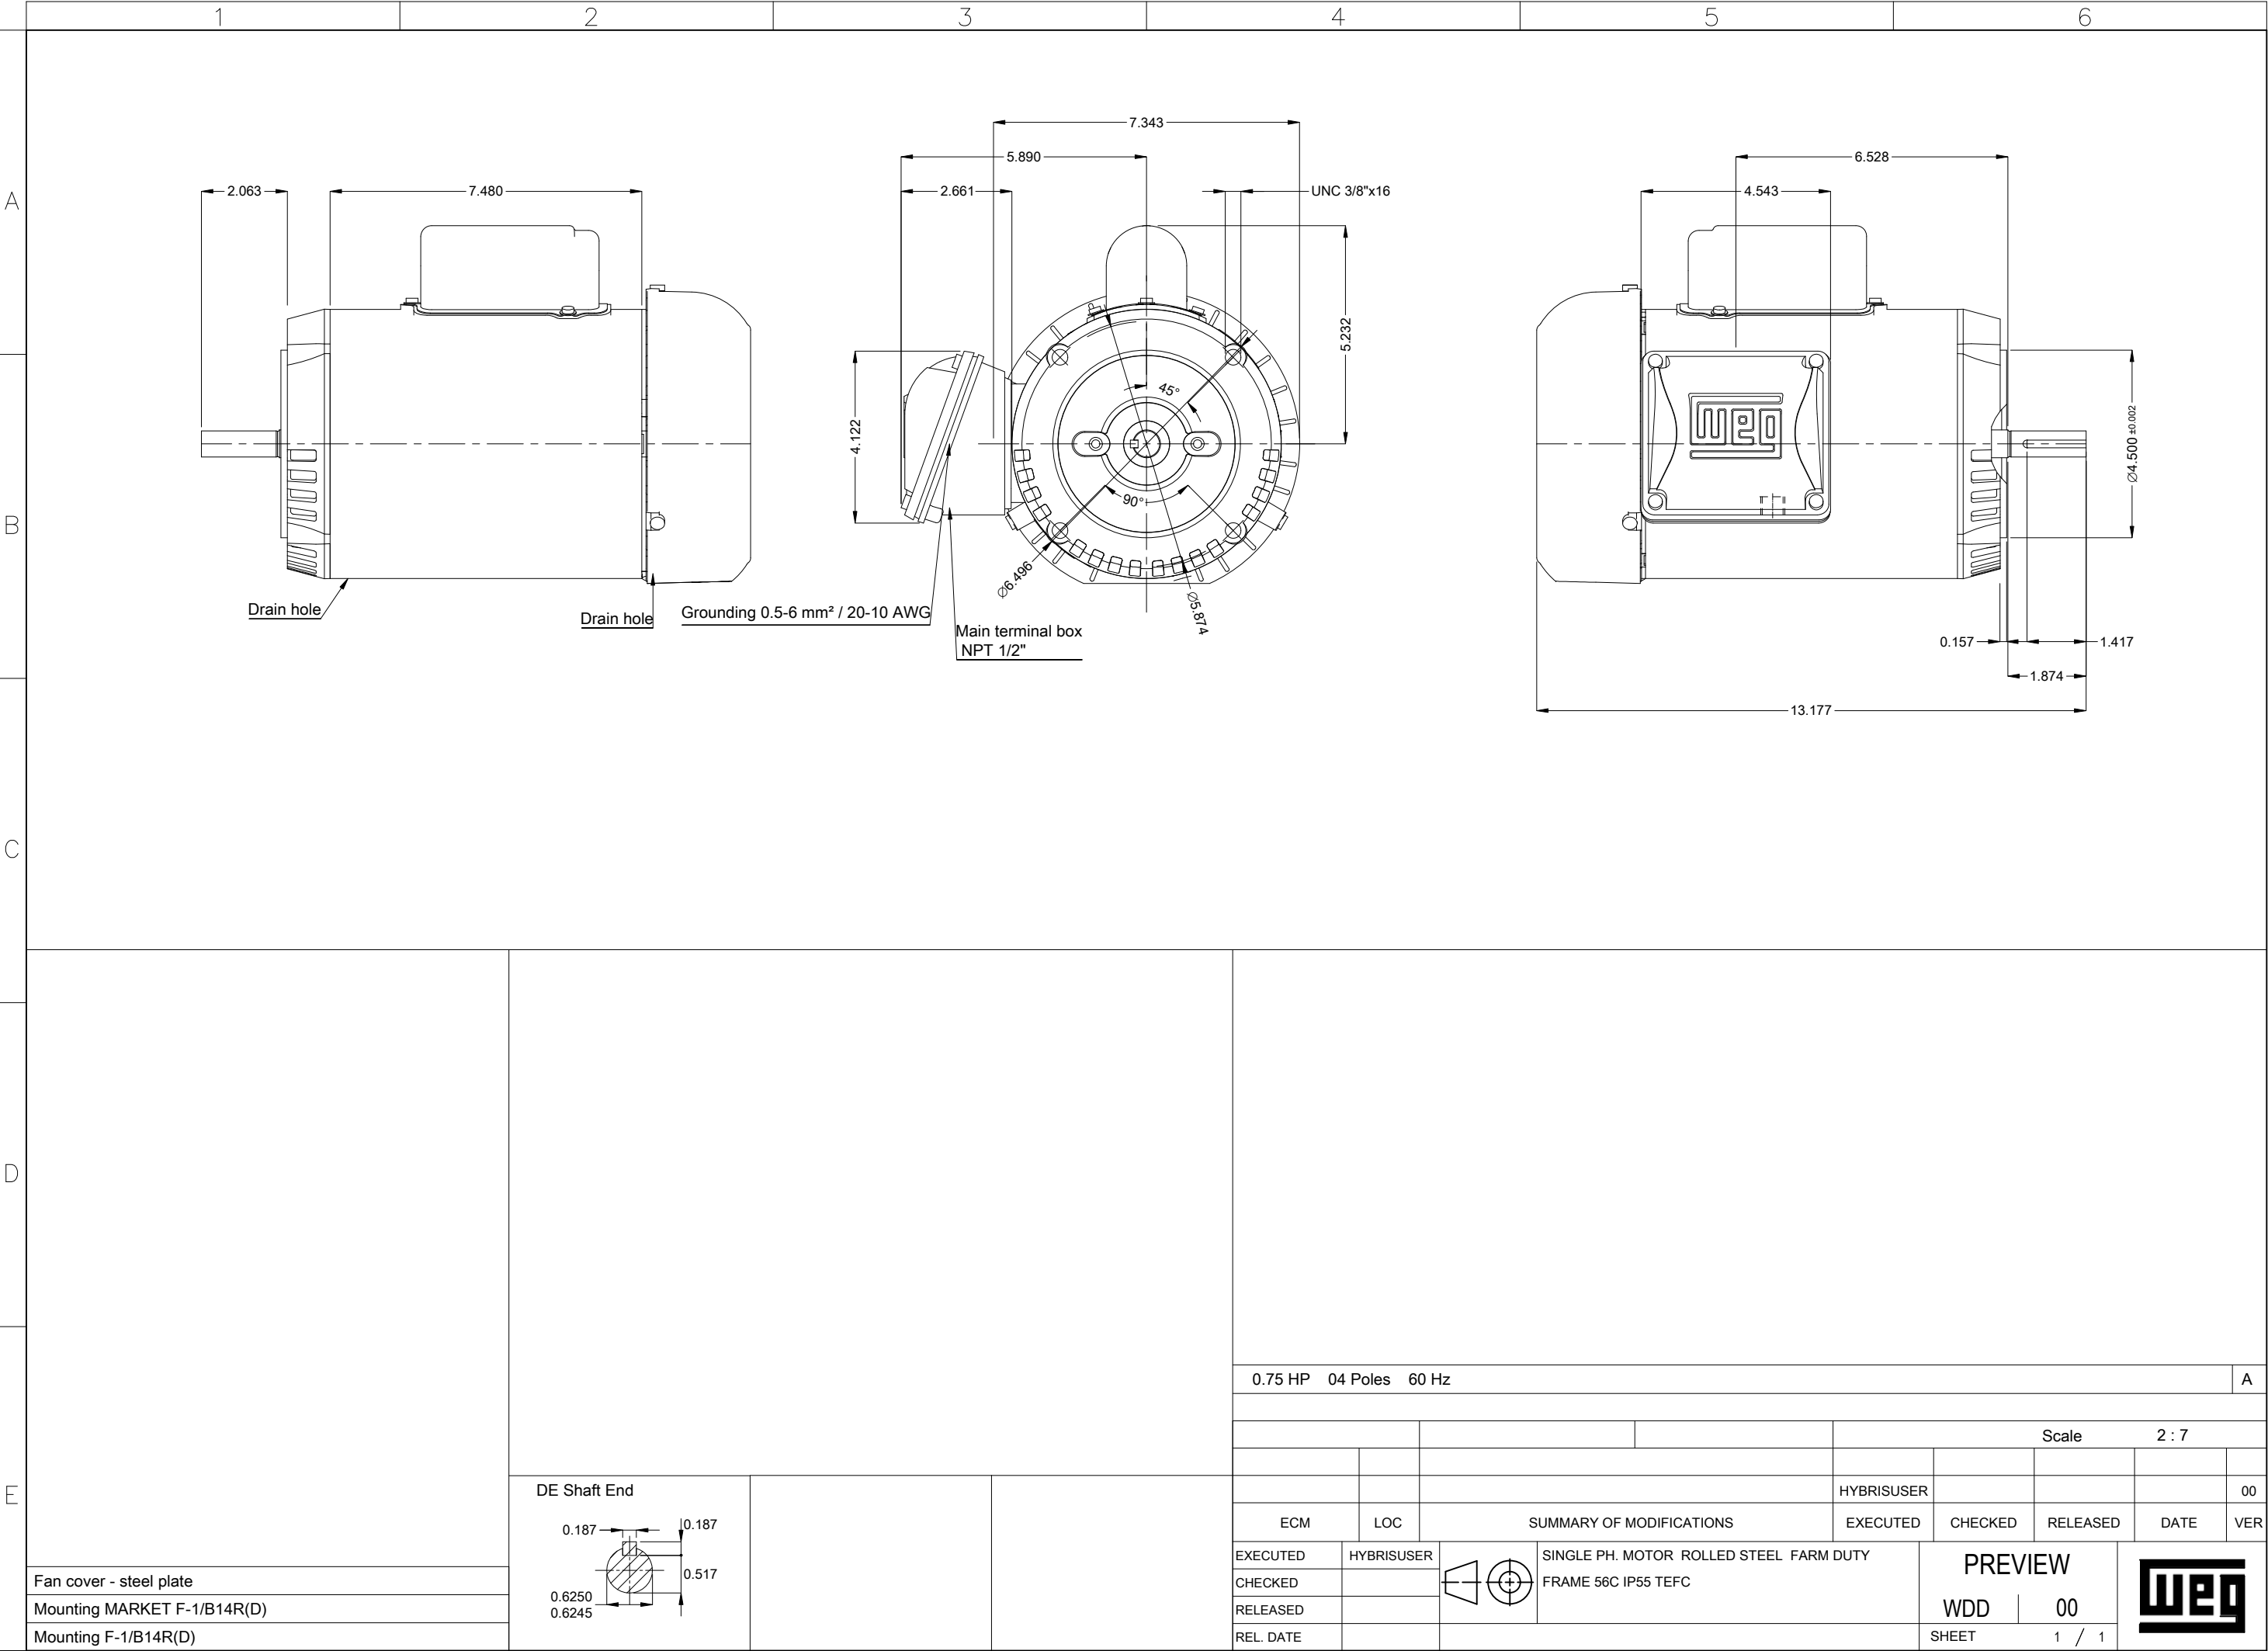

0.75 HP 04 Poles 60 Hz A

Scale 2 : 7

HYBRISUSER 00

ECM LOC SUMMARY OF MODIFICATIONS EXECUTED CHECKED RELEASED DATE VER

EXECUTED HYBRISUSER SINGLE PH. MOTOR ROLLED STEEL FARM DUTY

CHECKED FRAME 56C IP55 TEFC

RELEASED

REL. DATE SHEET 1 / 1

PREVIEW

WDD 00

