

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - ODP - Nema Premium Efficiency JM

Frame	: 143/5JM	Locked rotor time	: 15 s (hot) 27 s (cold)
Output	: 1.5 HP (1.1 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 575 V	Altitude	: 3280 ft
Rated current	: 1.66 A	Protection degree	: IP21
L. R. Amperes	: 14.4 A	Cooling method	: IC01 - ODP
LRC	: 8.7	Mounting	: W-6/V18R(D)
No load current	: 0.958 A	Rotation ¹	: Both
Rated speed	: 1760 rpm	Noise level ²	: 52.0 dB(A)
Slip	: 2.22 %	Vibration class	: A
Rated torque	: 4.41 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 280 %	Approx. weight ³	: 42.9 lb
Pull up torque	: 235 %	Painting plan	: 207N
Breakdown torque	: 330 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F	Design	: B
Service factor	: 1.15		
Moment of inertia (J)	: 0.1424 sq.ft.lb		

Output	50%	75%	100%
Efficiency (%)	84.0	86.5	86.5
Power Factor	0.56	0.69	0.77

Load type	: -
Load torque	: -
Load inertia (J=GD ² /4)	: -

	Drive end	Non drive end
Bearing type #1	6206-ZZ	6203-ZZ
Bearing type #2	-	-
Lubrication interval	-	-
Lubricant amount #1	-	-
Lubricant amount #2	-	-
Lubricant type	MOBIL POLYREX EM	

Foundation loads	
Max. traction	:
Max. compression	:

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1863247306		
Checked by	AUTOMATICO		Page	Rev.	
Date	19/06/2026		1 / 2	0	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - ODP - Nema Premium Efficiency JM




Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.	These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.
---	---

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1863247306		
Checked by	AUTOMATICO		Page	Rev.	
Date	19/06/2026		2 / 2	0	

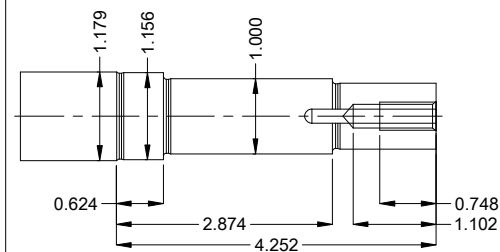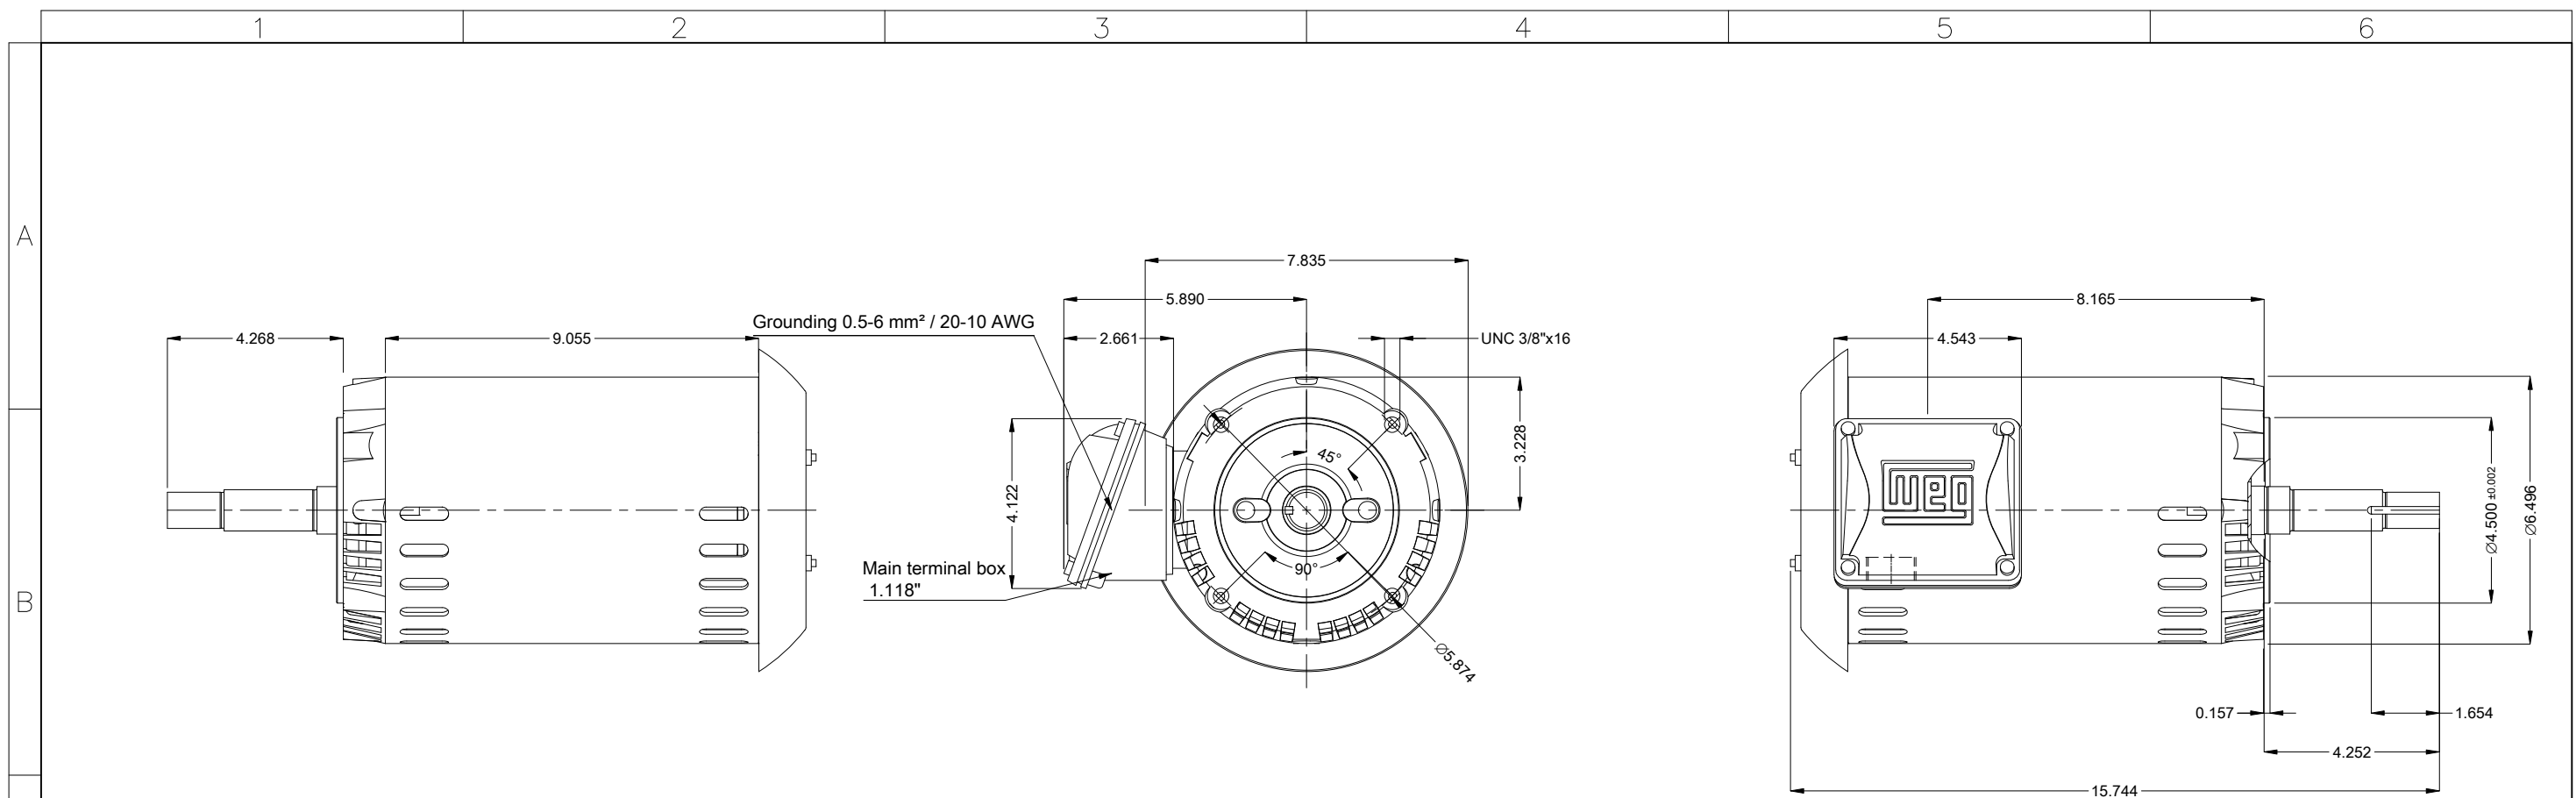

EUNC 3/8"-16 WEG WPR-7309

1.5 HP 04 Poles 60 Hz

A	
---	--

V.J. PAMENSKY CANADA INC.

Scale 1 : 4

PIRWBUSER

00

ECM

LOC

SUMMARY OF MODIFICATIONS

EXECUTED


CHECKED

RELEASED

DATE	VER
------	-----

EXECUTED

PIRWBUSER		
-----------	--	--



THREE PH. MOTOR	ROLLED STEEL	JM NEMA PREM. EFF.
-----------------	--------------	--------------------

FRAME 143/5JM IP21 ODP

PREVIEW

WDD

00



SHEET

1	/	1
---	---	---