

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer :					
Product line	: W22 NEMA Premium Efficiency Three-Phase	Product code :	12744764		
Frame	: 284/6TC	Cooling method	: IC411 - TEFC		
Insulation class	: F	Mounting	: F-1		
Duty cycle	: Cont.(S1)	Rotation <sup>1</sup>	: Both (CW and CCW)		
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line		
Altitude	: 1000 m.a.s.l.	Approx. weight <sup>3</sup>	: 195 kg		
Protection degree	: IP55	Moment of inertia (J)	: 0.3448 kgm <sup>2</sup>		
Design	: B				
Output [HP]	15	15	15	15	
Poles	8	8	8	8	
Frequency [Hz]	60	50	50	50	
Rated voltage [V]	230/460	380	400	415	
Rated current [A]	40.1/20.0	23.9	23.0	22.4	
L. R. Amperes [A]	220/110	103	110	114	
LRC [A]	5.5x(Code G)	4.3x(Code E)	4.8x(Code F)	5.1x(Code F)	
No load current [A]	20.0/10.0	9.80	10.5	11.5	
Rated speed [RPM]	880	720	725	725	
Slip [%]	2.22	4.00	3.33	3.33	
Rated torque [kgfm]	12.4	15.1	15.0	15.0	
Locked rotor torque [%]	220	150	170	190	
Breakdown torque [%]	229	200	200	220	
Service factor	1.25	1.00	1.00	1.15	
Temperature rise	80 K	105 K	105 K	105 K	
Locked rotor time	39s (cold) 22s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	27s (cold) 15s (hot)	
Noise level <sup>2</sup>	54.0 dB(A)	52.0 dB(A)	52.0 dB(A)	52.0 dB(A)	
Efficiency (%)	25%				
	50%	85.5	88.0	88.0	
	75%	90.0	88.5	88.5	
	100%	89.5	88.6	88.6	
Power Factor	25%				
	50%	0.61	0.66	0.62	
	75%	0.71	0.75	0.73	
	100%	0.77	0.79	0.78	
Losses at normative operating points (speed;torque), in percentage of rated output power					
Losses (%)	P1 (0,9;1,0)	11.4	12.5	12.5	12.5
	P2 (0,5;1,0)	9.9	10.8	10.8	10.8
	P3 (0,25;1,0)	9.3	10.2	10.2	10.2
	P4 (0,9;0,5)	5.6	6.2	6.2	6.2
	P5 (0,5;0,5)	4.1	4.4	4.4	4.4
	P6 (0,5;0,25)	2.8	3.1	3.1	3.1
	P7 (0,25;0,25)	2.1	2.3	2.3	2.3
Bearing type	: Drive end : 6311 C3 Non drive end : 6211 C3	Foundation loads			
Sealing	: V'Ring V'Ring	Max. traction	: 375 kgf		
Lubrication interval	: 20000 h 20000 h	Max. compression	: 570 kgf		
Lubricant amount	: 18 g 11 g				
Lubricant type	: Mobil Polyrex EM				
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process.		These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.			
Rev.	Changes Summary	Performed	Checked	Date	
Performed by					
Checked by			Page	Revision	
Date	31/03/2026		1 / 6		

# DATA SHEET

## Three Phase Induction Motor - Squirrel Cage



Customer : \_\_\_\_\_

Notes  
USABLE @208V 42.9A SF 1.15 SFA 49.3A

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by			Page	Revision
Date	31/03/2026		2 / 6	

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 12744764

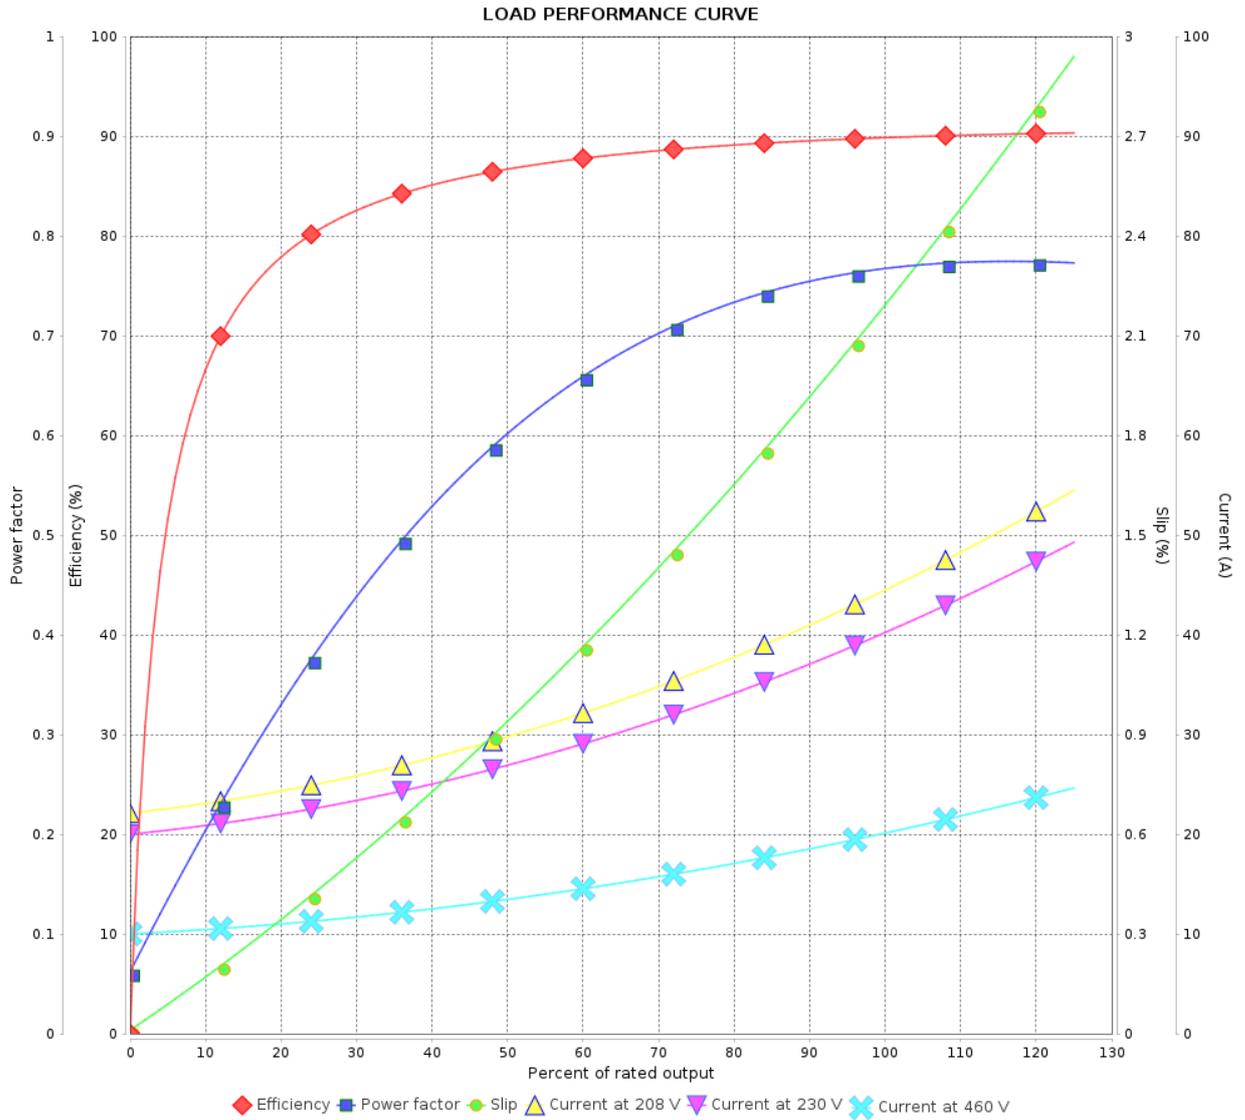

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 3 / 6	Revision
Checked by				
Date 31/03/2026				


# LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase      Product code : 12744764

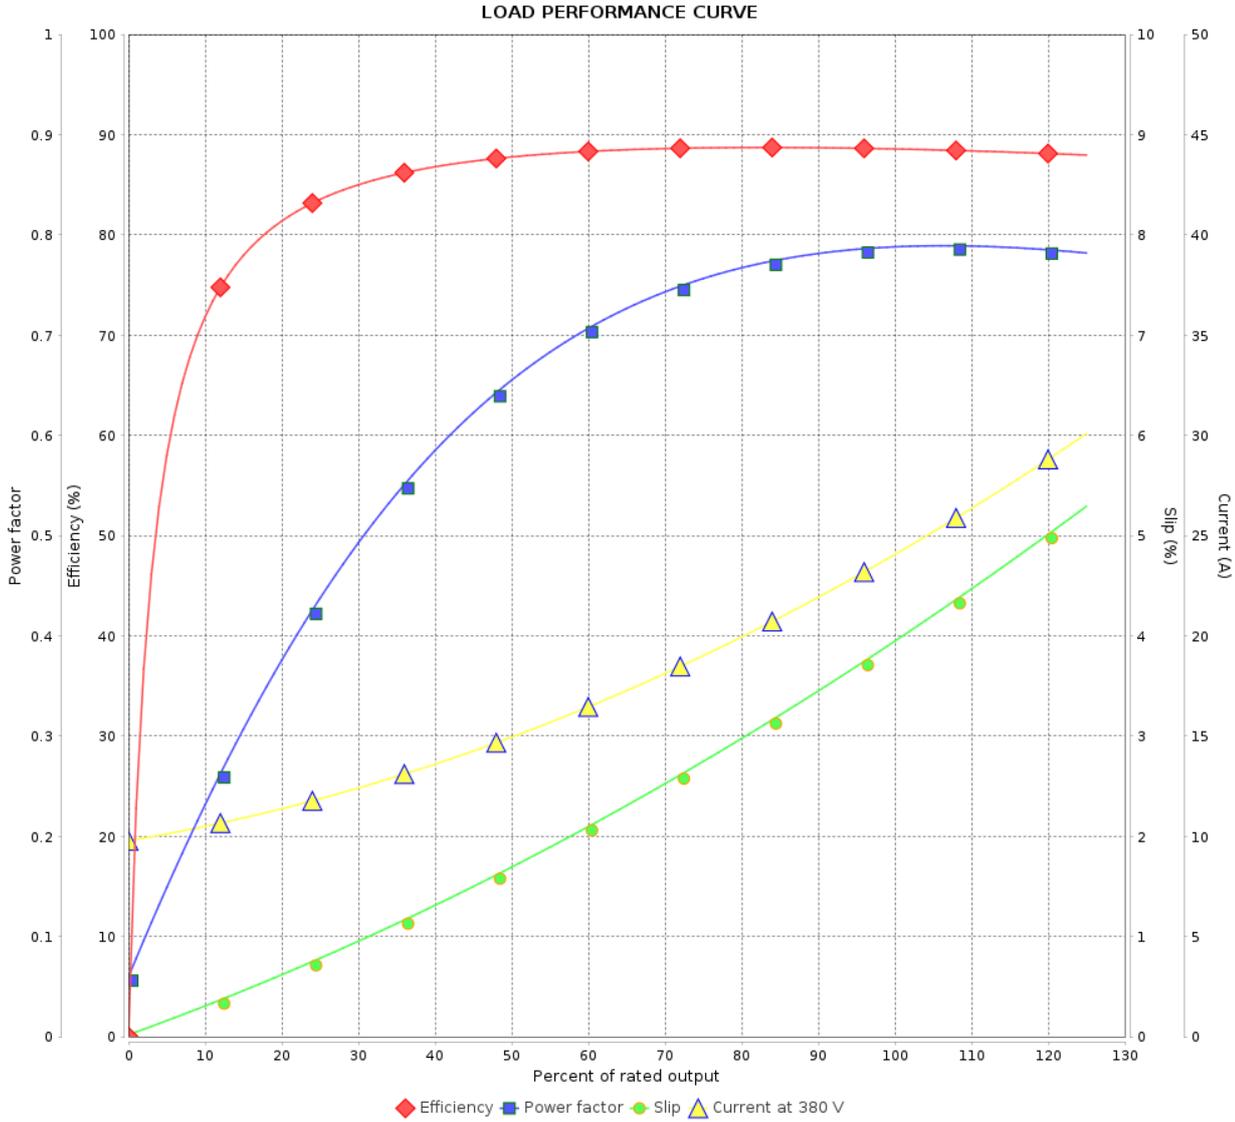

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 6	Revision
Checked by				
Date	31/03/2026			

# LOAD PERFORMANCE CURVE


## Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency  
Three-Phase


Product code : 12744764

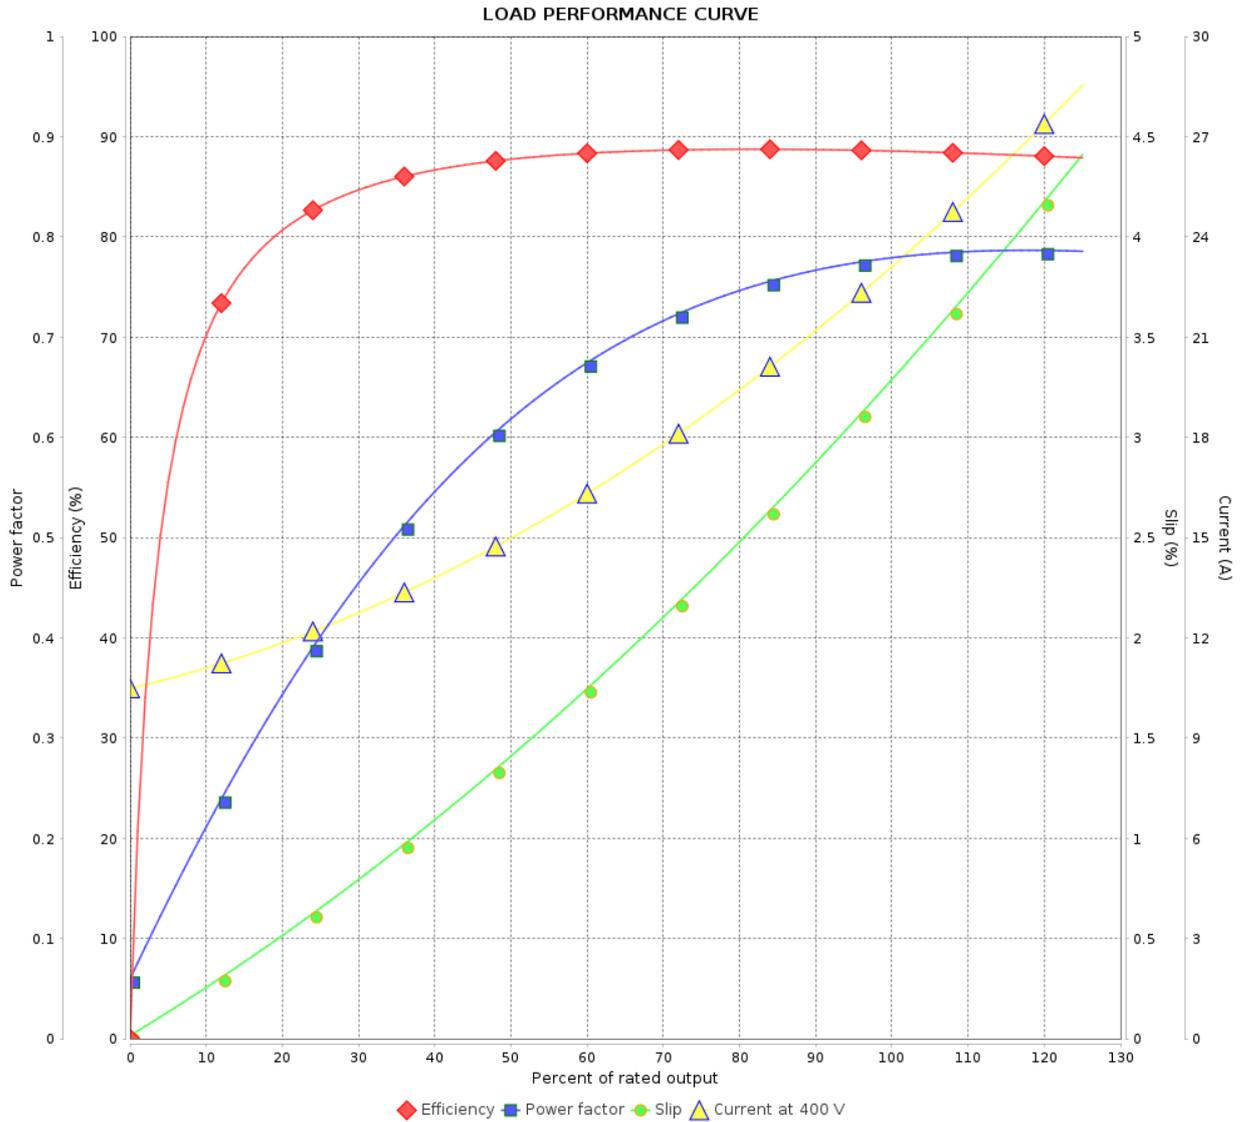

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 5 / 6	Revision
Checked by				
Date	31/03/2026			

# LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase

Product code : 12744764

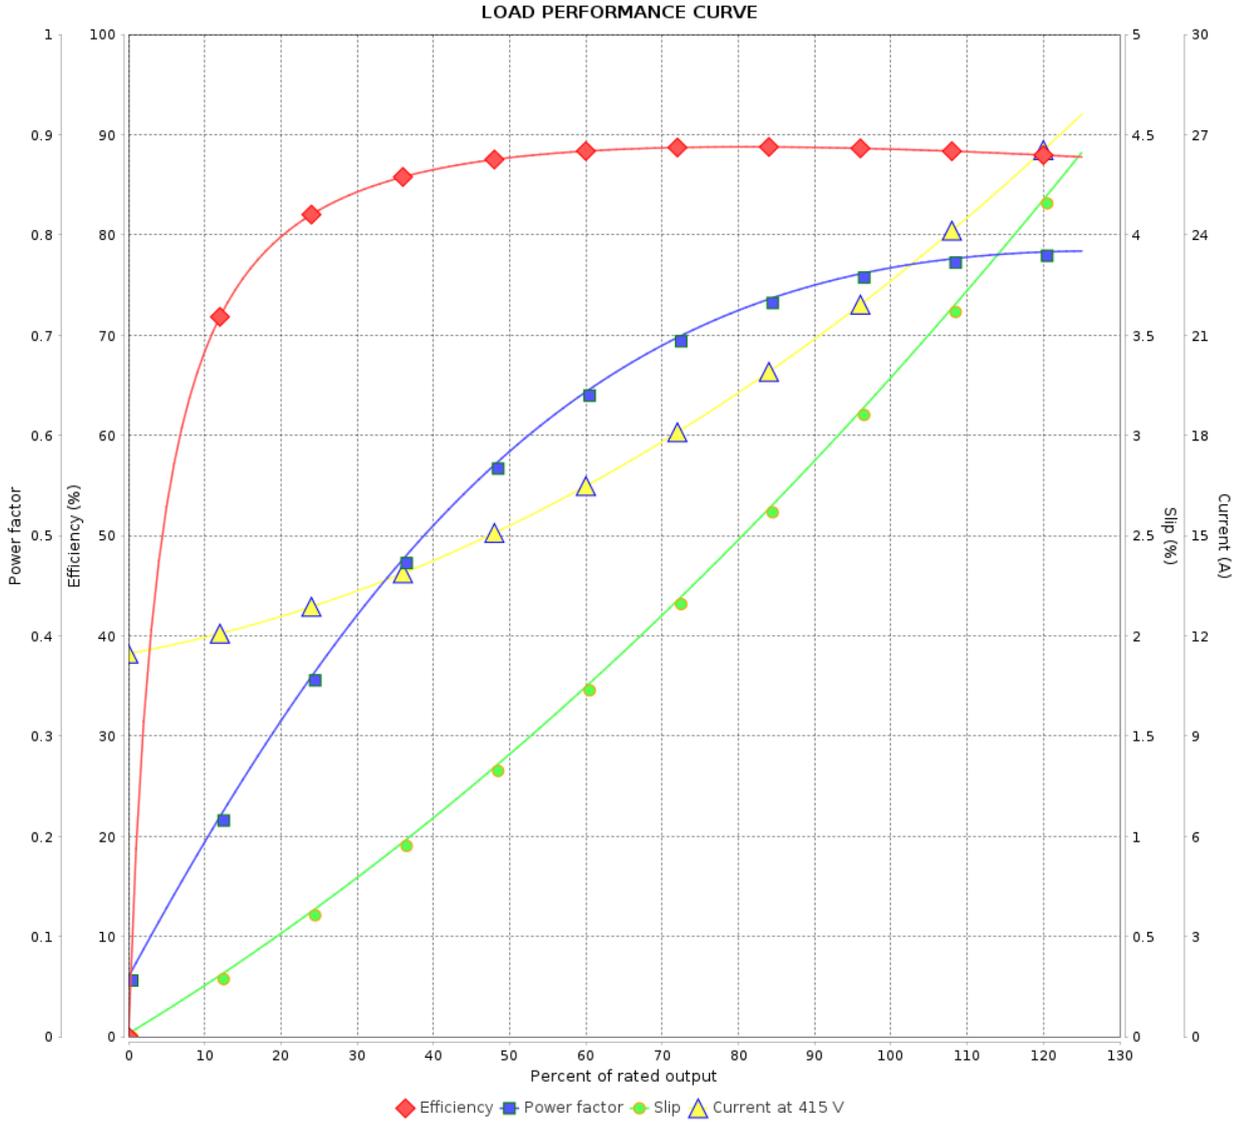

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page		Revision
Checked by		6 / 6		
Date		31/03/2026		

