

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :					
Product line		: Saw Arbor Motor Standard Efficiency Three-Phase		Product code : 14381273	
Frame	: 80M/MS	Locked rotor time	: 12s (cold) 7s (hot)		
Output	: 5 HP (3.7 kW)	Temperature rise	: 80 K		
Poles	: 2	Duty cycle	: S6		
Frequency	: 60 Hz	Ambient temperature	: -20°C to +40°C		
Rated voltage	: 575 V	Altitude	: 1000 m.a.s.l.		
Rated current	: 5.32 A	Protection degree	: IP54		
L. R. Amperes	: 42.5 A	Cooling method	: IC411 - TEFC		
LRC	: 8.0	Mounting	: B3R(D)		
No load current	: 2.30 A	Rotation ¹	: CCW		
Rated speed	: 3470 rpm	Noise level ²	: 62.0 dB(A)		
Slip	: 3.61 %	Starting method	: Direct On Line		
Rated torque	: 1.05 kgfm	Approx. weight ³	: 45.0 kg		
Locked rotor torque	: 340 %				
Breakdown torque	: 409 %				
Insulation class	: F				
Service factor	: 1.15				
Moment of inertia (J)	: 0.0041 kgm ²				
Design	: N				
Output	50%	75%	100%	Foundation loads	
Efficiency (%)	82.0	84.5	85.0	Max. traction : 67 kgf	
Power Factor	0.66	0.77	0.82	Max. compression : 112 kgf	
		<u>Drive end</u>		<u>Non drive end</u>	
Bearing type	:	6307 ZZ		6207 ZZ	
Sealing	:	Without Bearing Seal		Without Bearing Seal	
Lubrication interval	:	-		-	
Lubricant amount	:	-		-	
Lubricant type	:	Mobil Polyrex EM			
Notes					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	28/10/2024			1 / 2	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : Saw Arbor Motor Standard
Efficiency Three-Phase

Product code : 14381273

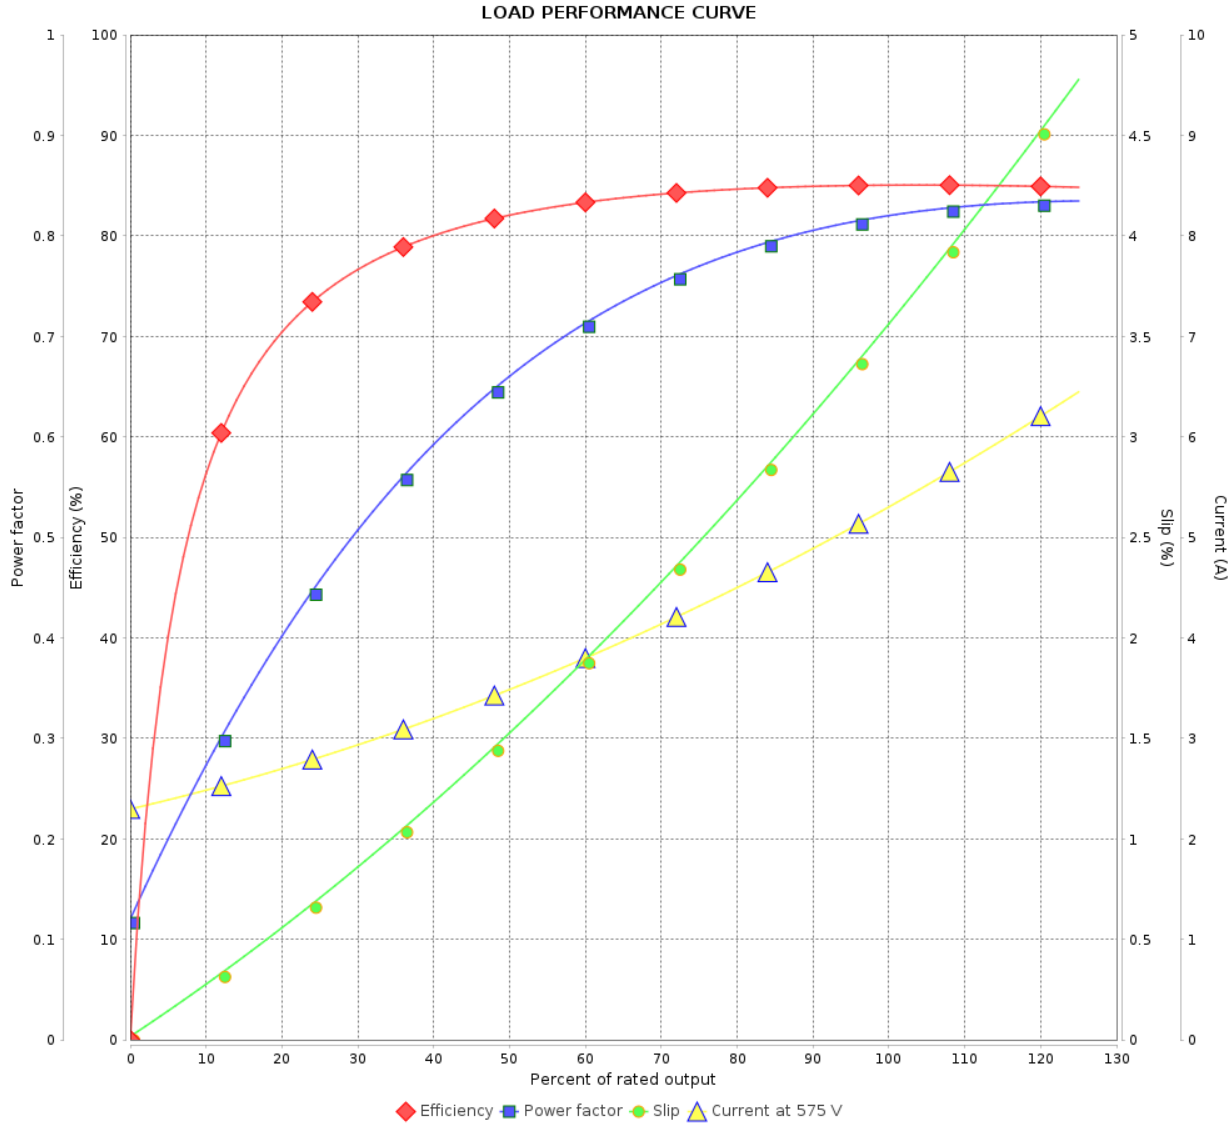


Performance : 575 V 60 Hz 2P

Rated current : 5.32 A
 LRC : 8.0
 Rated torque : 1.05 kgfm
 Locked rotor torque : 340 %
 Breakdown torque : 409 %
 Rated speed : 3470 rpm

Moment of inertia (J) : 0.0041 kgm²
 Duty cycle : S6
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 2	Revision
Checked by				
Date	28/10/2024			

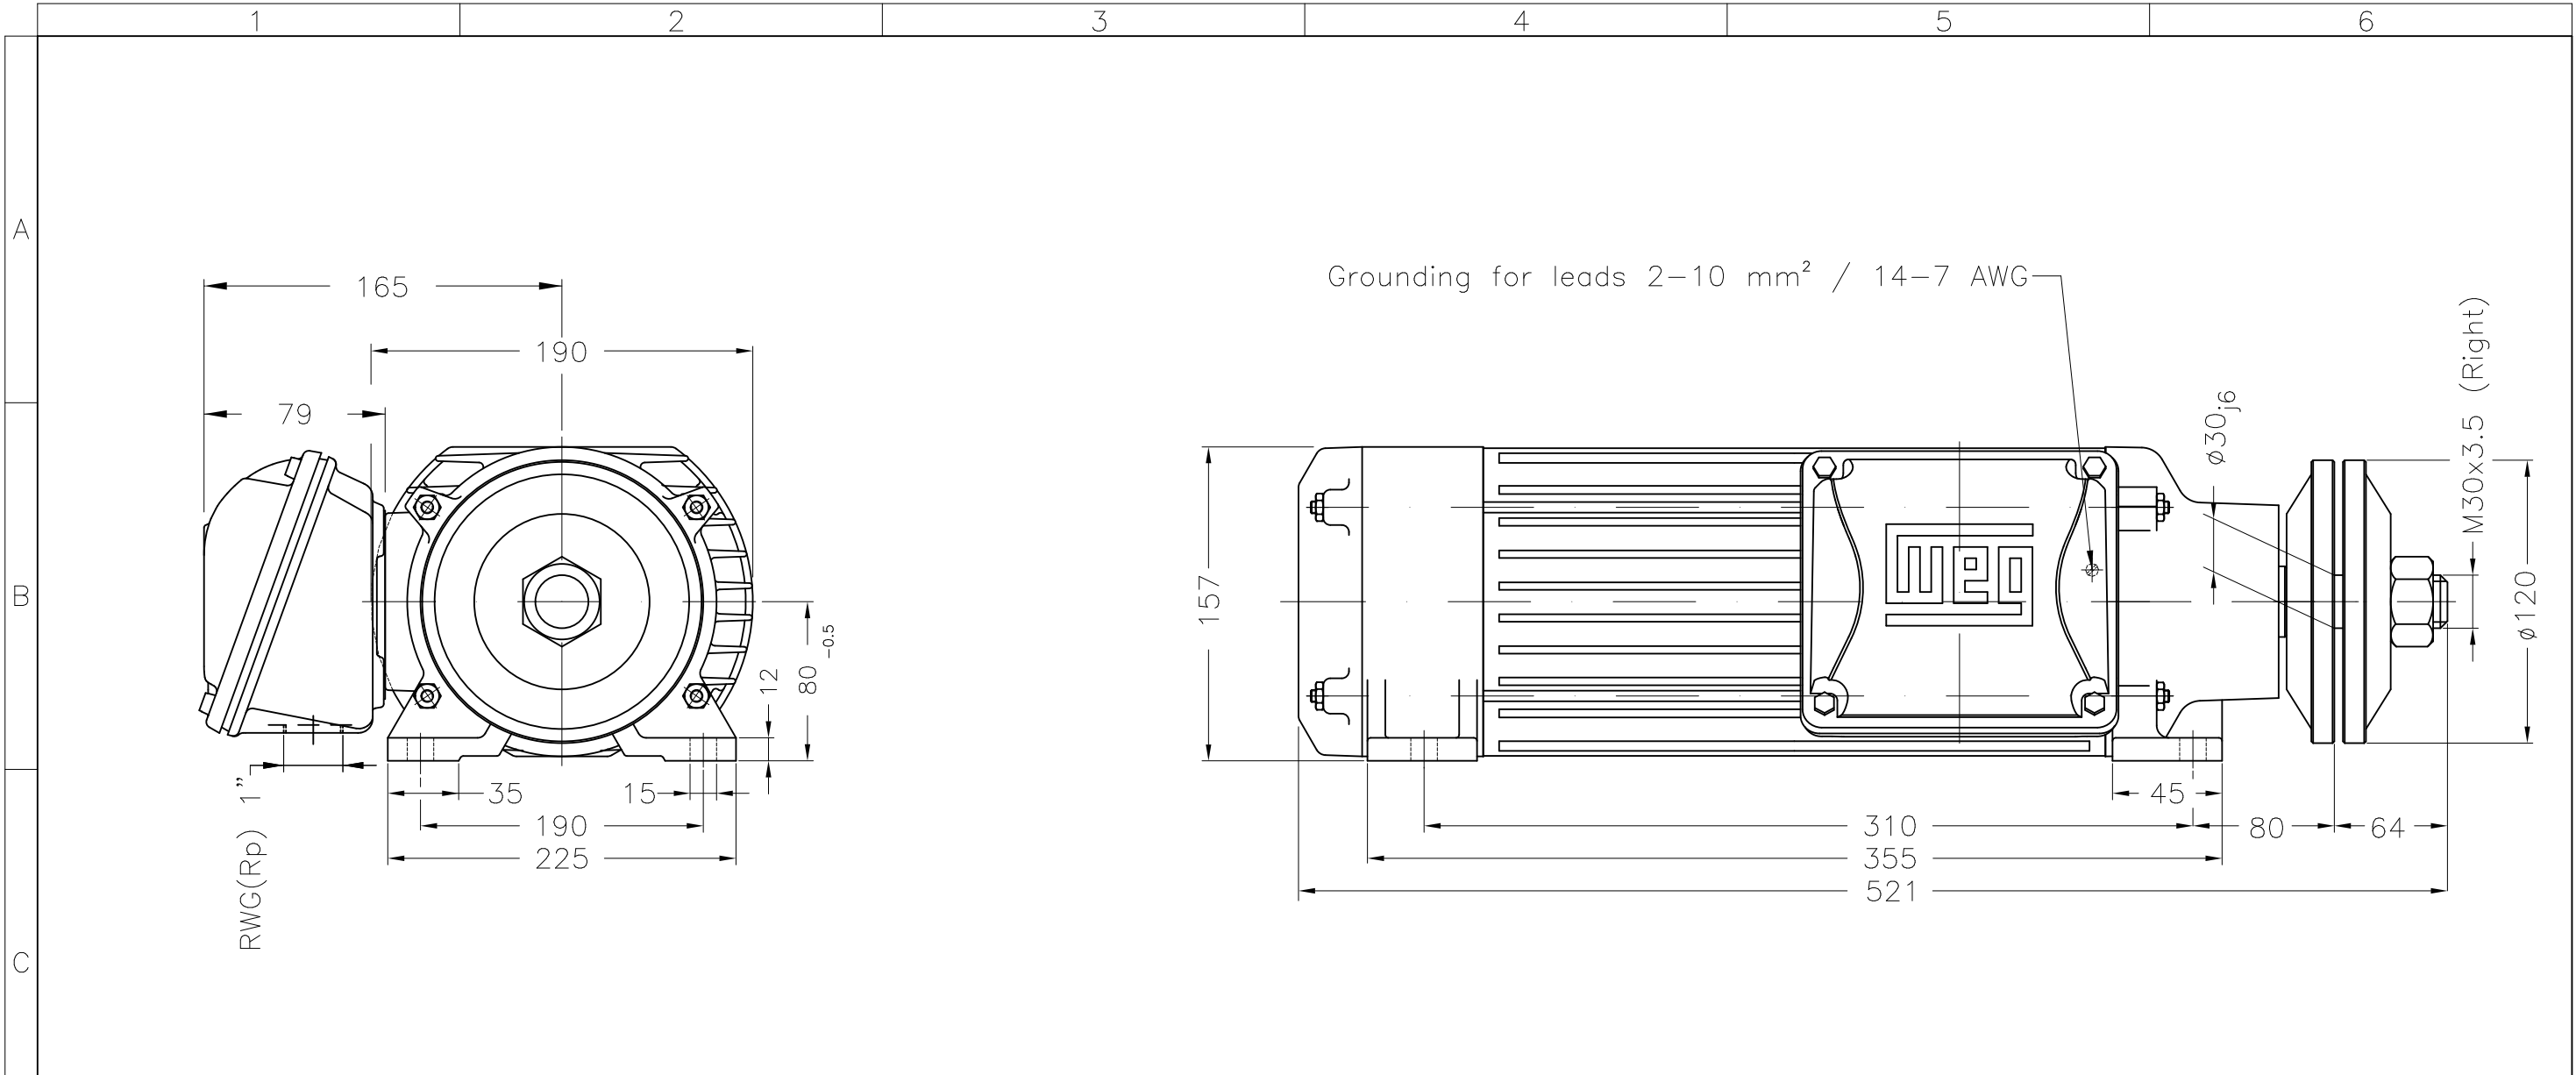

--	--	--

Counterclockwise rotation				5 HP 02 Poles 60 Hz		A
Color RAL 7022						
Painting plan 207A						
Mounting B3R(D)						
				HYBRISUSER		00
ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED
EXECUTED	HYBRISUSER	THREE PH. MOTOR SAW ARBOR MOTOR		<div style="display: flex; align-items: center;"> <p>PREVIEW</p> </div>		
CHECKED		FRAME 80/MS IP54 TEFC				
RELEASED						
REL. DATE						
		WMO Jaragua do Sul		Product Engineering		SHEET 1 / 1