

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 Shark - TENV Premium Efficiency

Product code : 18727725

Frame	: 56C	Locked rotor time	: 14 s (hot) 25 s (cold)
Output	: 0.75 HP (0.55 kW)	Temperature rise	: 80 K
Poles	: 4	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 230/460 V	Altitude	: 3280 ft
Rated current	: 2.60/1.30 A	Protection degree	: IP66
L. R. Amperes	: 23.4/11.7 A	Cooling method	: IC410 - TENV
LRC	: 9.0	Mounting	: F-1/B14R(D)
No load current	: 1.82/0.910 A	Rotation ¹	: Both
Rated speed	: 1770 rpm	Noise level ²	: 52.0 dB(A)
Slip	: 1.67 %	Vibration class	: A
Rated torque	: 2.19 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 350 %	Approx. weight ³	: 30.9 lb
Pull up torque	: 295 %	Color	: NO COLOR
Breakdown torque	: 450 %		
Insulation class	: F		
Service factor	: 1.15		
Moment of inertia (J)	: 0.0902 sq.ft.lb		

Output	50%	75%	100%	Load type	: -
Efficiency (%)	77.0	77.0	81.5	Load torque	: -
Power Factor	0.43	0.56	0.65	Load inertia (J=GD ² /4)	: -
Bearing type #1	Drive end 6204-2RS	Non drive end 6203-2RS		Foundation loads	
Lubrication interval	-	-		Max. traction	:
Lubricant amount #1	-	-		Max. compression	:
Lubricant type	MOBIL POLYREX EM				

Notes

See notes on page 2.

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq		1875501790		
Checked by	AUTOMATICO		Page	Rev.	
Date	17/07/2026		1 / 2	0	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 Shark - TENV Premium Efficiency Product code : 18727725




Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes

Standards	Specification	: MG1 - Part 10	Vibration	: MG1 - Part 7
	Test	: MG1 - Part 12	Tolerance	: MG1 - Part 12
	Noise	: MG1 - Part 9		

This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight, subject to be changed after manufacturing process.	These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.
---	---

Rev.	Changes Summary		Rev.	Checked	Date
Performed by	farazq			1875501790	
Checked by	AUTOMATICO			Page	Rev.
Date	17/07/2026			2 / 2	0

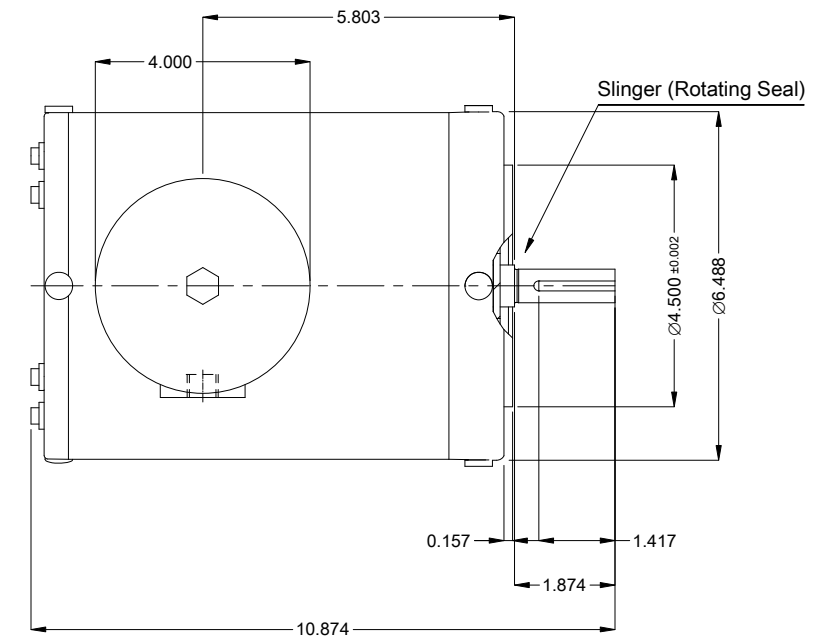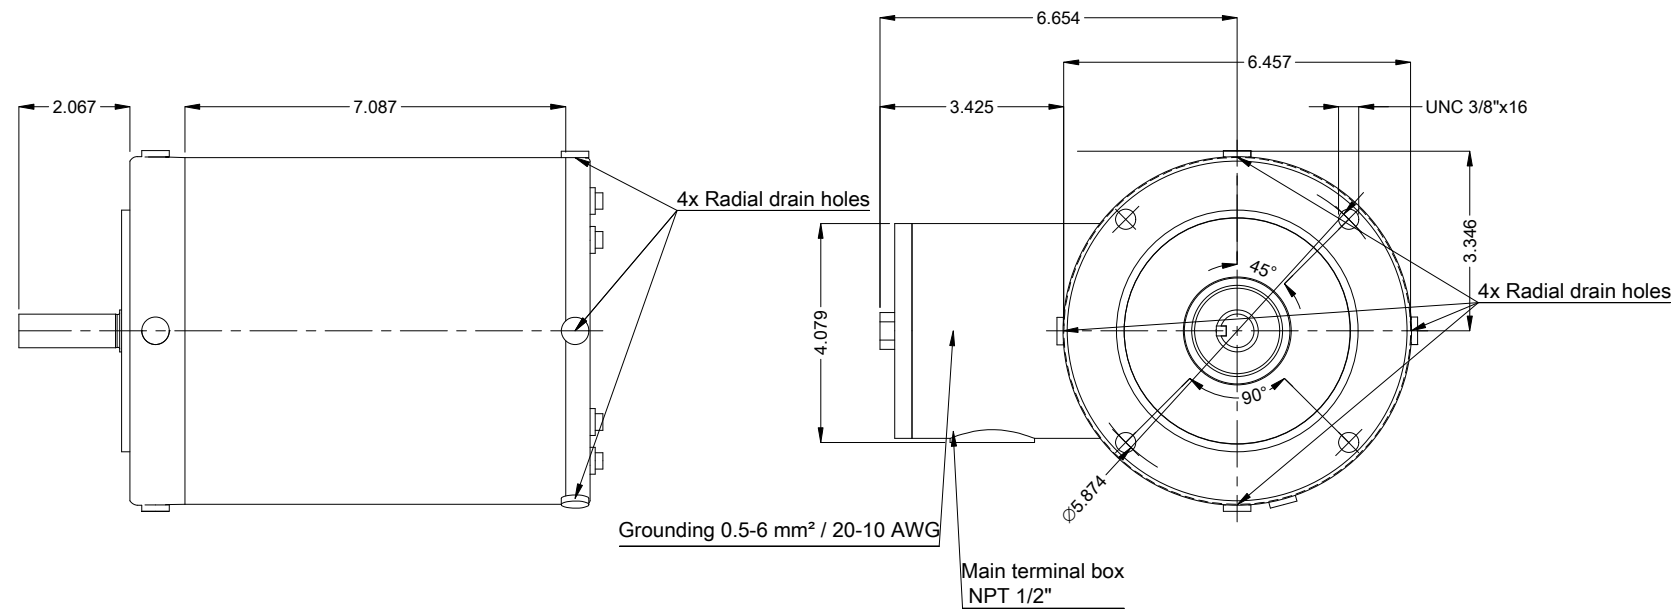

Shaft material - stainless steel AISI 304
Mounting MARKET F-1/B14R(D)
Mounting B14R(D)

0.75 HP 04 Poles 60 Hz										A
V.J. PAMENSKY CANADA INC.										
						Scale		2 : 7		
						PIRWBUSER				00
ECM		LOC		SUMMARY OF MODIFICATIONS		EXECUTED		CHECKED		RELEASED
EXECUTED		PIRWBUSER		 THREE PH. MOTOR PREM. EFF. FRAME 56C IP66 TENV		PREVIEW WDD 00				
CHECKED										
RELEASED										
REL. DATE										
						SHEET		1 / 1		