

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA Premium Efficiency Three-Phase Product code : 14407016

Frame : 256T	Cooling method : IC411 - TEFC
Insulation class : F	Mounting : F-1
Duty cycle : Cont.(S1)	Rotation ¹ : Both (CW and CCW)
Ambient temperature : -20°C to +40°C	Starting method : Direct On Line
Altitude : 1000 m.a.s.l.	Approx. weight ³ : 167 kg
Protection degree : IP55	Moment of inertia (J) : 0.1751 kgm ²
Design : B	

Output [HP]	10	10	10	10
Poles	6	6	6	6
Frequency [Hz]	60	50	50	50
Rated voltage [V]	230/460	380	400	415
Rated current [A]	26.6/13.3	16.1	15.3	14.8
L. R. Amperes [A]	192/95.8	88.6	91.8	99.2
LRC [A]	7.2x(Code J)	5.5x(Code G)	6.0x(Code H)	6.7x(Code J)
No load current [A]	13.2/6.60	7.00	7.50	8.00
Rated speed [RPM]	1175	965	970	975
Slip [%]	2.08	3.50	3.00	2.50
Rated torque [kgfm]	6.18	7.52	7.48	7.44
Locked rotor torque [%]	270	200	220	240
Breakdown torque [%]	310	229	260	280
Service factor	1.15	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K
Locked rotor time	63s (cold) 35s (hot)	59s (cold) 33s (hot)	55s (cold) 31s (hot)	52s (cold) 29s (hot)
Noise level ²	59.0 dB(A)	57.0 dB(A)	57.0 dB(A)	57.0 dB(A)
Efficiency (%)	25%	88.6	90.2	89.3
	50%	89.5	89.5	89.5
	75%	90.2	88.5	89.5
	100%	91.0	87.5	88.5
Power Factor	25%	0.35	0.39	0.34
	50%	0.60	0.65	0.60
	75%	0.70	0.72	0.68
	100%	0.78	0.81	0.80

	<u>Drive end</u>	<u>Non drive end</u>	Foundation loads
Bearing type :	6309 C3	6209 C3	Max. traction : 244 kgf
Sealing :	Oil Seal	Lip Seal	Max. compression : 411 kgf
Lubrication interval :	20000 h	20000 h	
Lubricant amount :	13 g	9 g	
Lubricant type :	Mobil Polyrex EM		

Notes
USABLE @208V 29.4A SF 1.15 SFA 33.8A

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	28/10/2024			

Page 1 / 6
Revision

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermostat - 2 wires	1 x Phase	155 °C

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 2 / 6Revision	
Checked by					
Date	28/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA
Premium Efficiency Three-Phase

Product code : 14407016

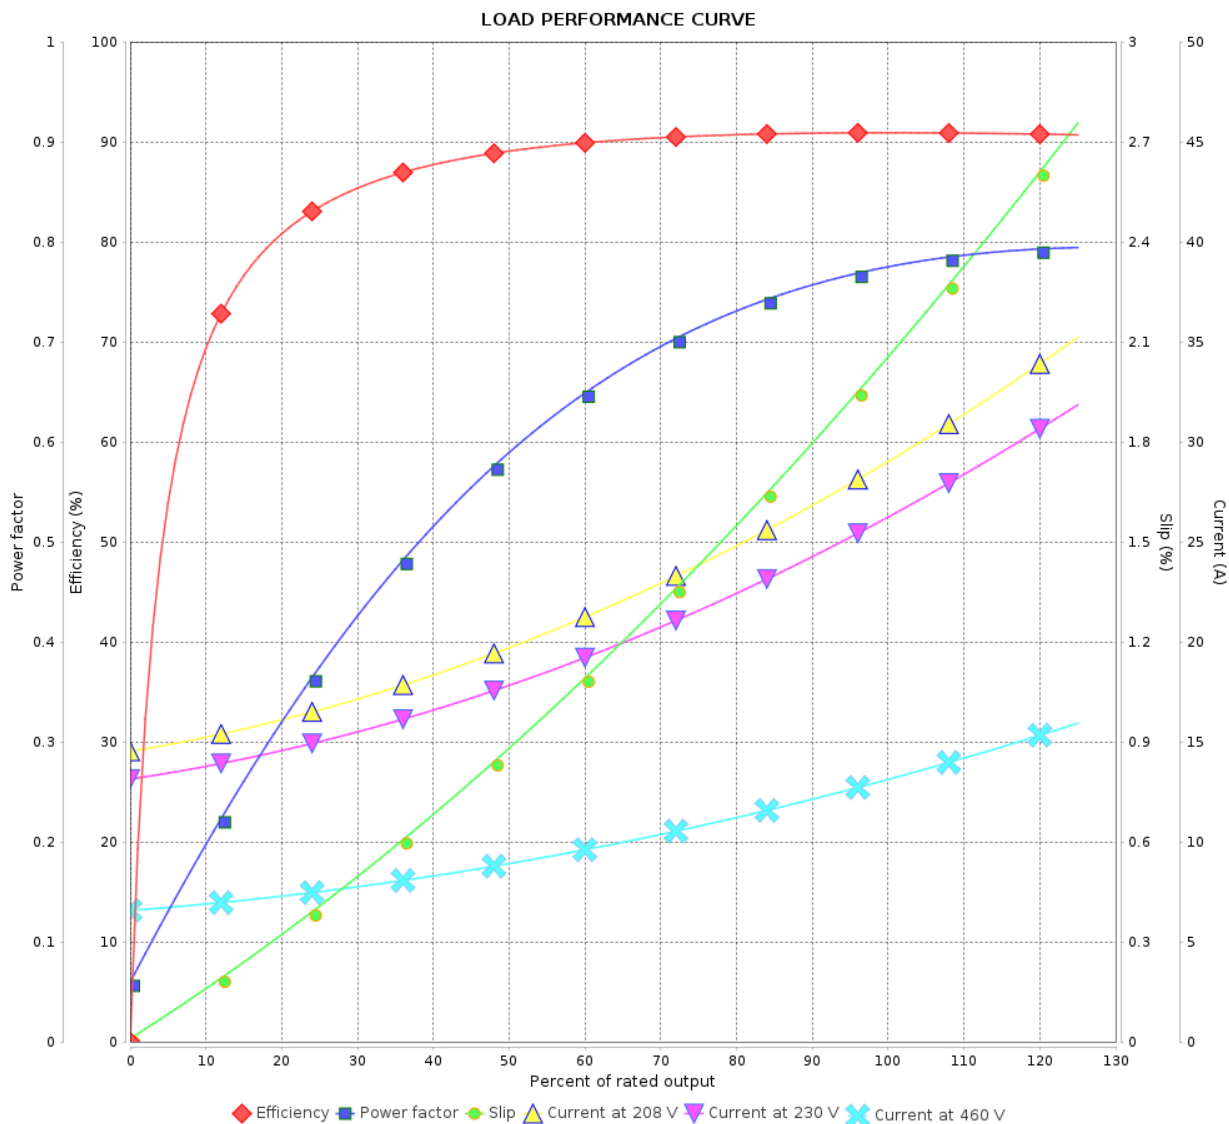

Performance : 230/460 V 60 Hz 6P

Rated current : 26.6/13.3 A
LRC : 7.2
Rated torque : 6.18 kgfm
Locked rotor torque : 270 %
Breakdown torque : 310 %
Rated speed : 1175 rpm

Moment of inertia (J) : 0.1751 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.15
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 3 / 6	Revision
Checked by					
Date	28/10/2024				

LOAD PERFORMANCE CURVE

Three Phase Induction Motor - Squirrel Cage




Customer :

Product line : W21 Explosion Proof NEMA
Premium Efficiency Three-Phase

Product code : 14407016

LOAD PERFORMANCE CURVE

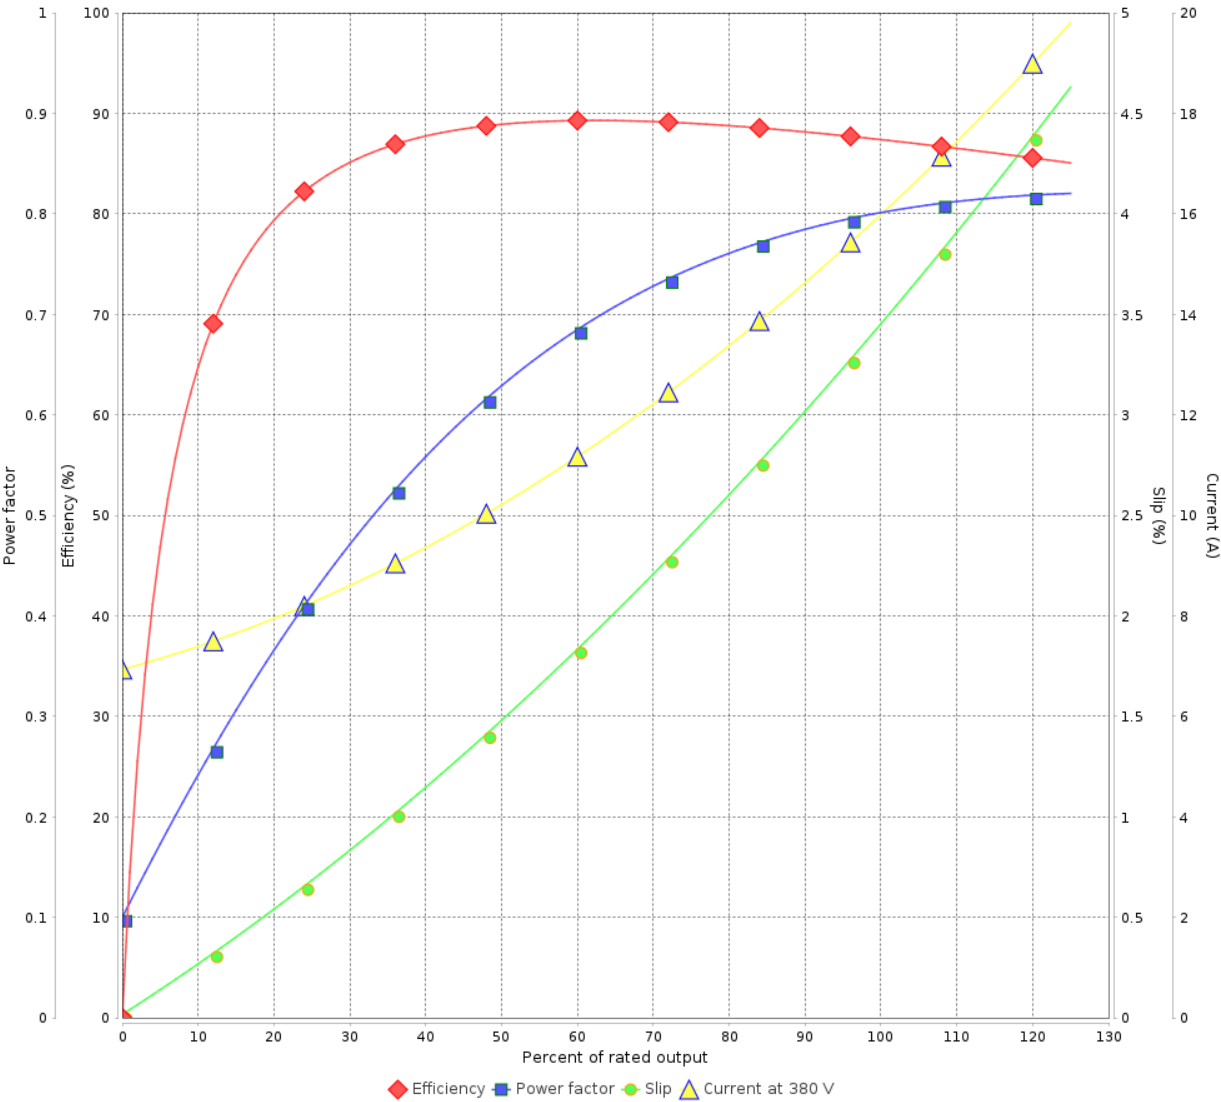

Performance : 380 V 50 Hz 6P IE2

Rated current	: 16.1 A	Moment of inertia (J)	: 0.1751 kgm ²
LRC	: 5.5	Duty cycle	: Cont.(S1)
Rated torque	: 7.52 kgfm	Insulation class	: F
Locked rotor torque	: 200 %	Service factor	: 1.00
Breakdown torque	: 229 %	Temperature rise	: 80 K
Rated speed	: 965 rpm	Design	: B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 4 / 6	Revision
Checked by					
Date	28/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA
Premium Efficiency Three-Phase

Product code : 14407016

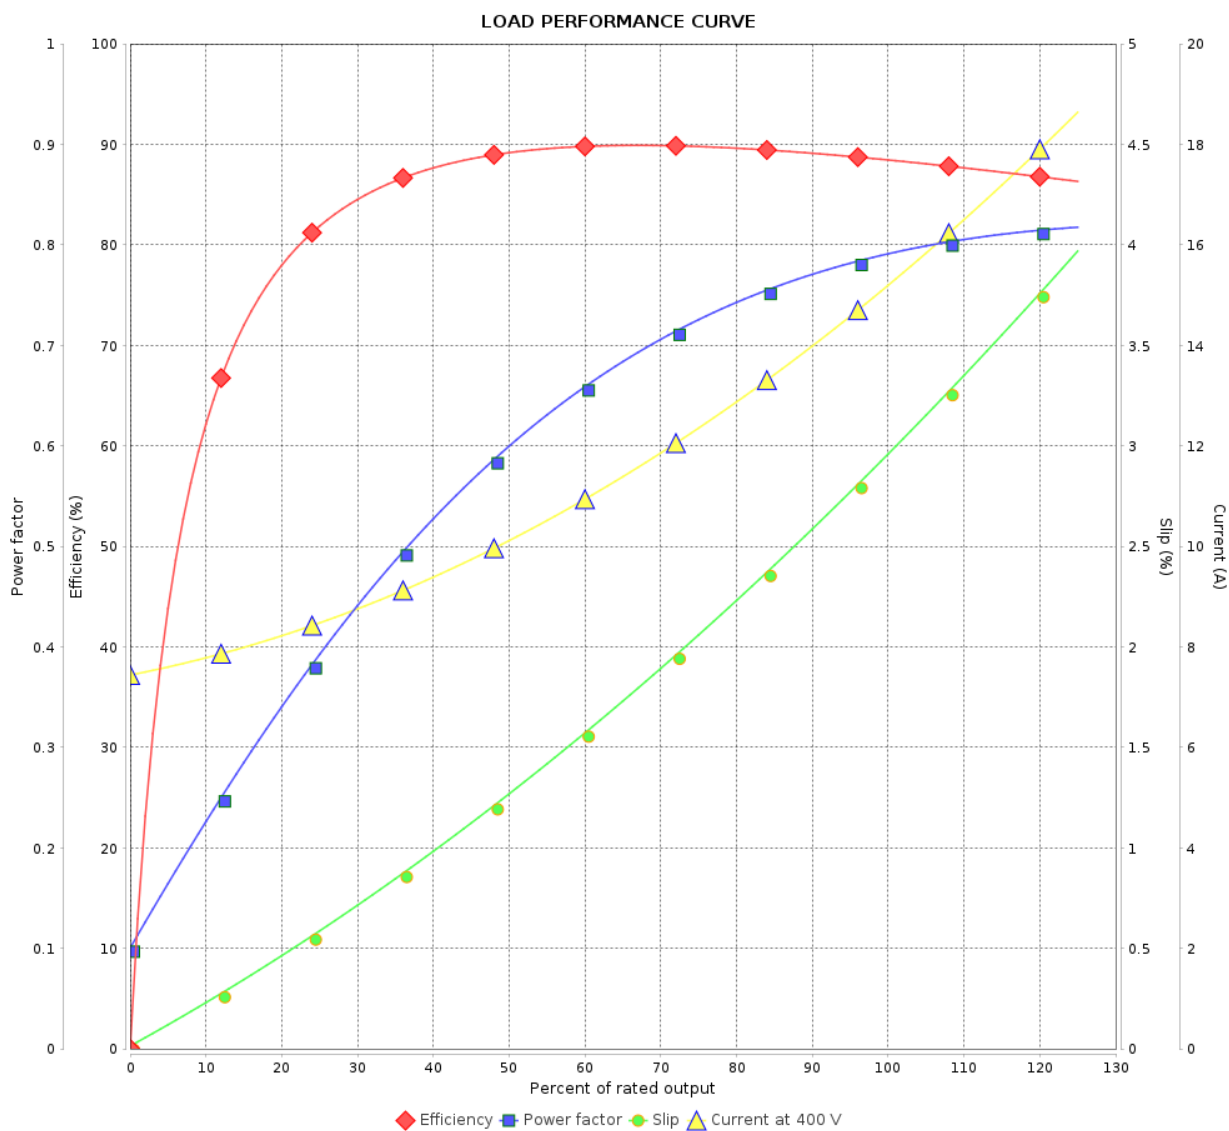

Performance : 400 V 50 Hz 6P IE2

Rated current : 15.3 A
LRC : 6.0
Rated torque : 7.48 kgfm
Locked rotor torque : 220 %
Breakdown torque : 260 %
Rated speed : 970 rpm

Moment of inertia (J) : 0.1751 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 5 / 6	Revision
Checked by					
Date	28/10/2024				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W21 Explosion Proof NEMA
Premium Efficiency Three-Phase

Product code : 14407016

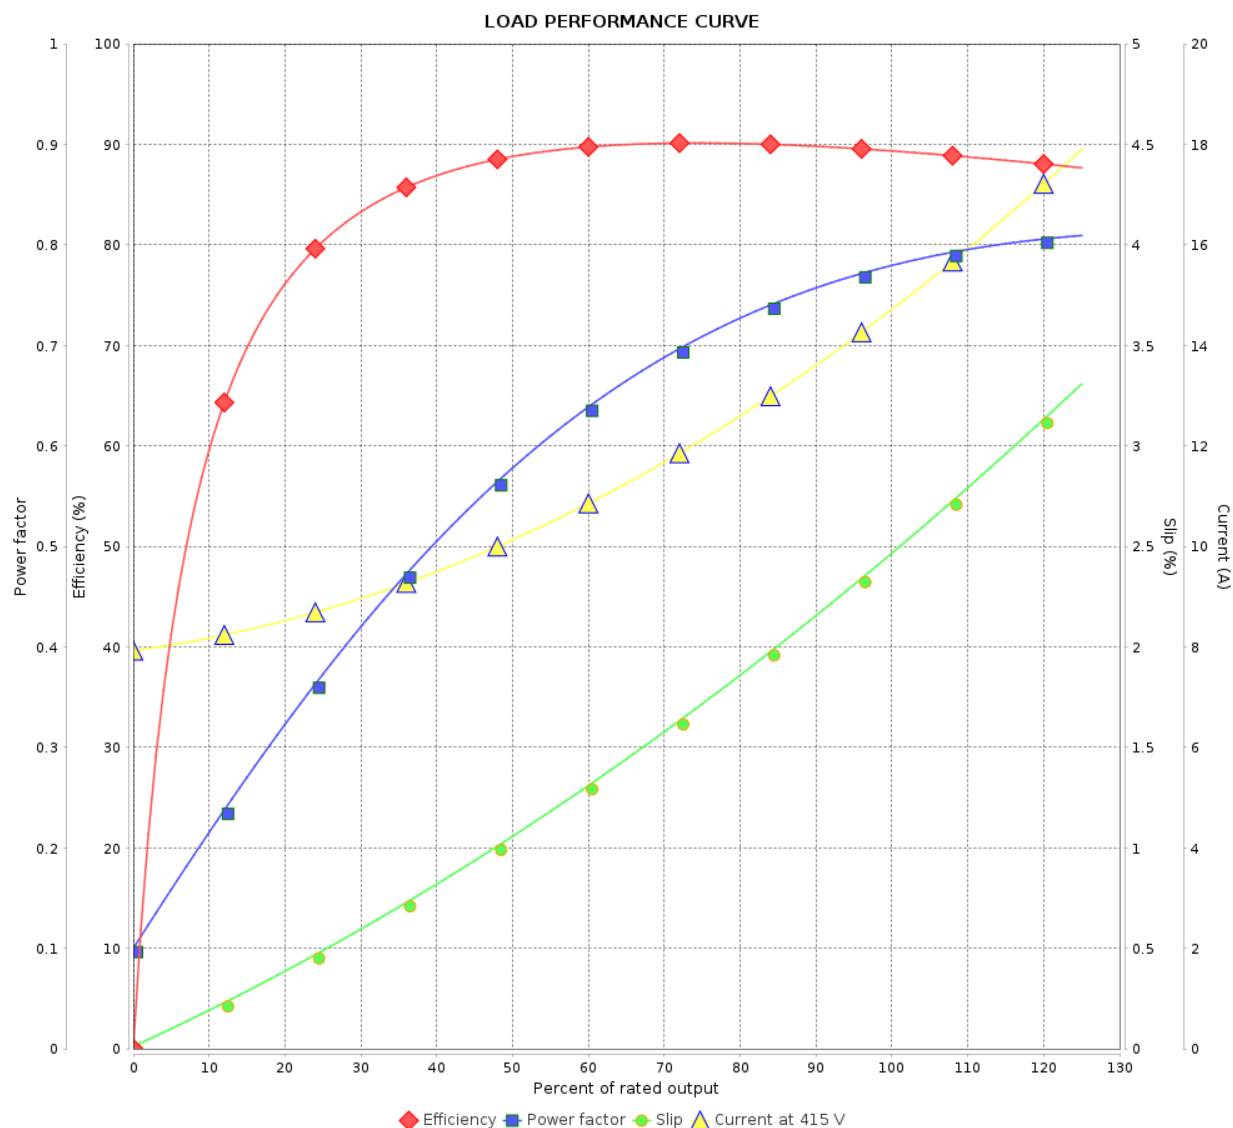


Performance : 415 V 50 Hz 6P IE3

Rated current : 14.8 A
LRC : 6.7
Rated torque : 7.44 kgfm
Locked rotor torque : 240 %
Breakdown torque : 280 %
Rated speed : 975 rpm

Moment of inertia (J) : 0.1751 kgm²
Duty cycle : Cont.(S1)
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : B

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				6 / 6	
Date					
	28/10/2024				

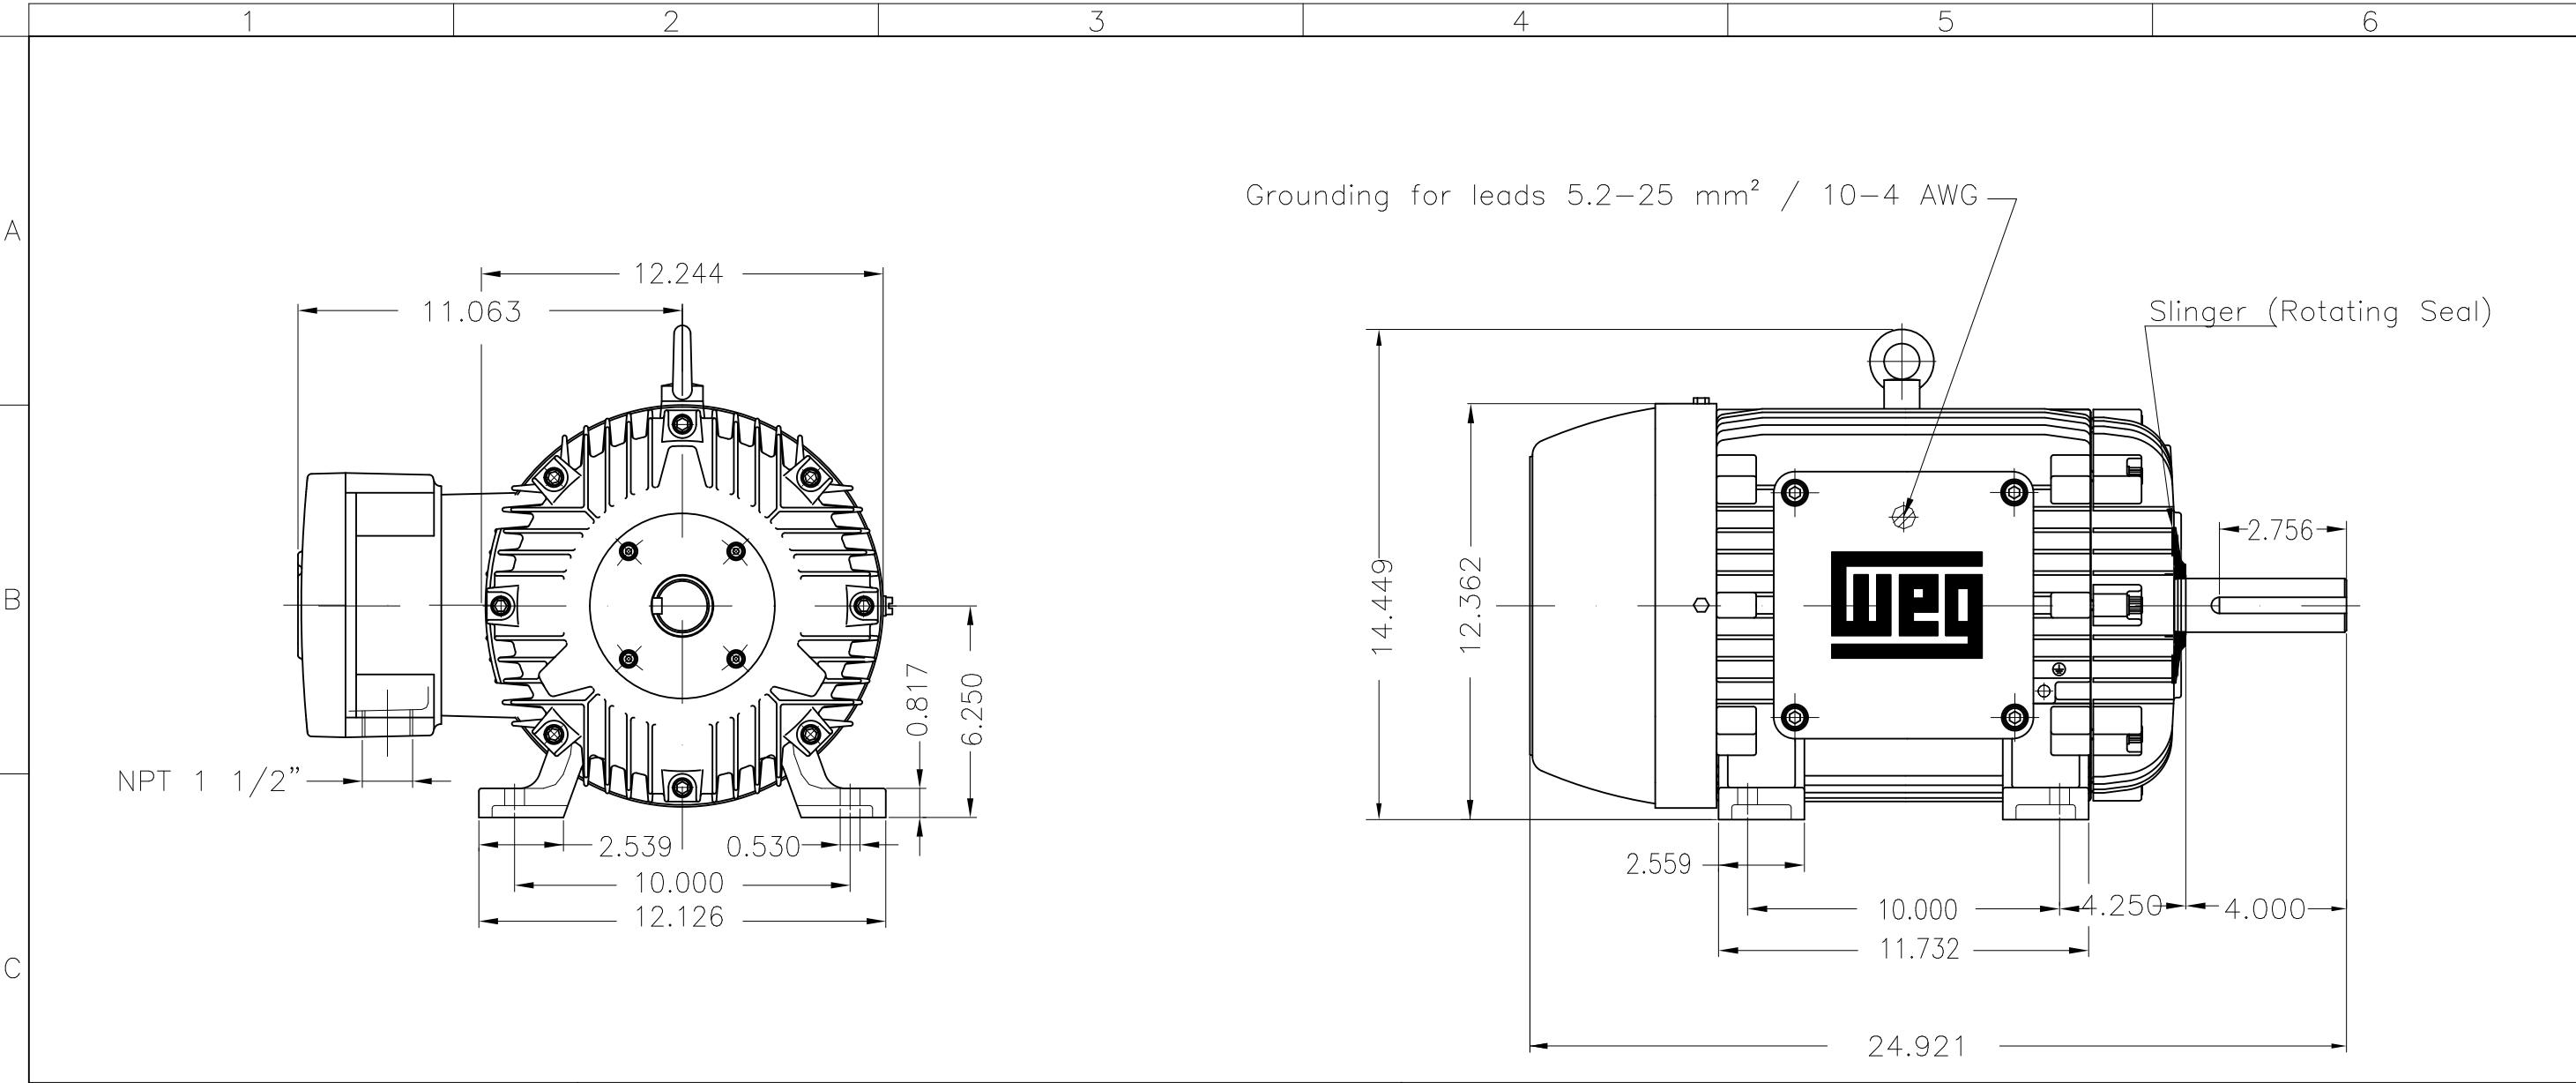

D										
E										
10 HP 06 Poles 60 Hz										