

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 NEMA Premium Efficiency Three-Phase Product code : 12447105

Frame	: 284/6TSC	Locked rotor time	: 30s (cold) 17s (hot)
Output	: 25 HP (18.5 kW)	Temperature rise	: 80 K
Frequency	: 60 Hz	Duty cycle	: Cont.(S1)
Rated voltage	: 575 V	Ambient temperature	: -20°C to +40°C
Poles	: 2	Altitude	: 1000 m.a.s.l.
Rated current	: 23.3 A	Protection degree	: IP55
	: 6.3x(Code G)	Cooling method	: IC411 - TEFC
Rated speed	: 3550 rpm	Mounting	: F-1
Rated torque	: 5.11 kgfm	Rotation ¹	: Both (CW and CCW)
Insulation class	: F	Noise level ²	: 72.0 dB(A)
Service factor	: 1.25	Starting method	: Direct On Line
Moment of inertia (J)	: 0.1135 kgm ²	Approx. weight ³	: 169 kg
Design	: B		

Output	25%	50%	75%	100%	Foundation loads	
Efficiency (%)	0.000	91.0	91.7	91.7	Max. traction	: 83 kgf
Power Factor	0.00	0.77	0.84	0.87	Max. compression	: 252 kgf

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.6	6.8	5.9	4.4	2.6	1.7	1.0

	Drive end	Non drive end
Bearing type	: 6311 C3	6211 C3
Sealing	: V'Ring	V'Ring
Lubrication interval	: 14000 h	17000 h
Lubricant amount	: 18 g	11 g
Lubricant type	Mobil Polyrex EM	

Notes

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	05/05/2026			
		Page		Revision
		1 / 2		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage






Customer :

Product line : W22 NEMA Premium Efficiency
Three-Phase

Product code : 12447105

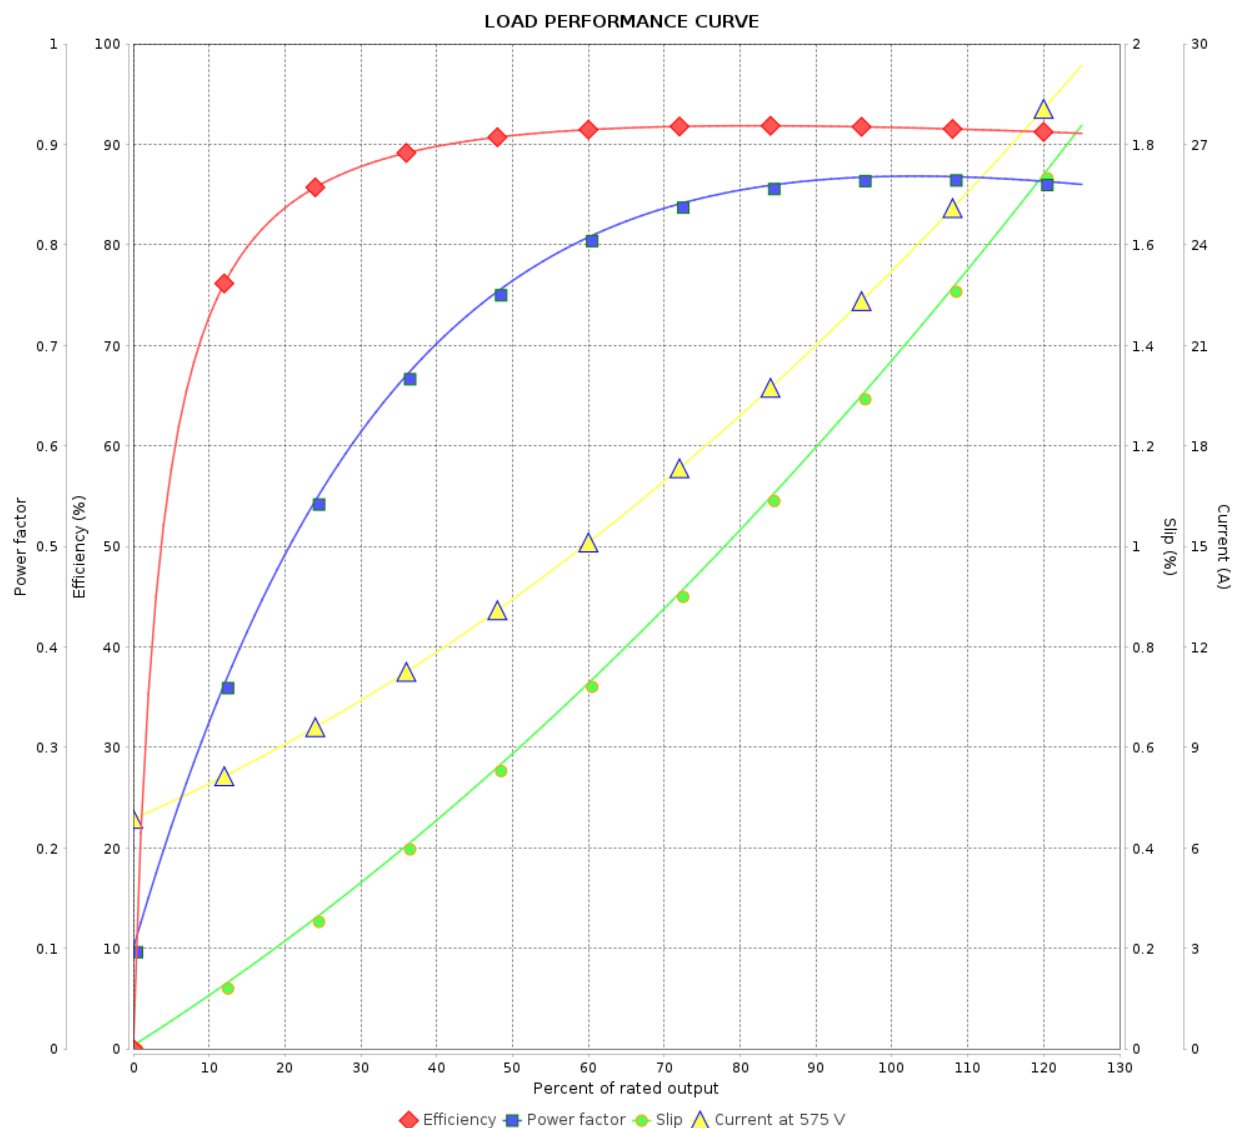

Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by					
Date	05/05/2026				
			Page 2 / 2	Revision	

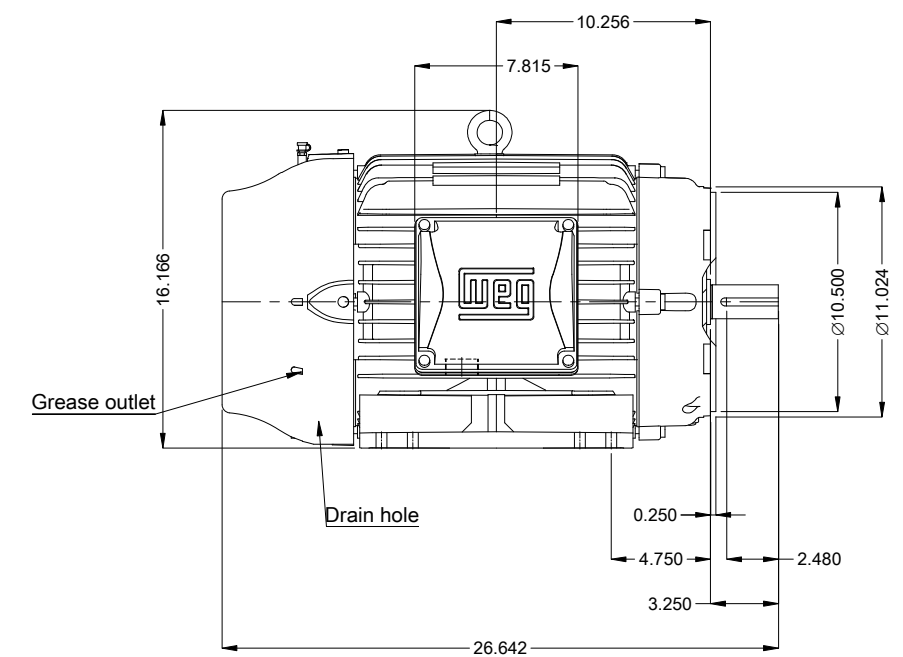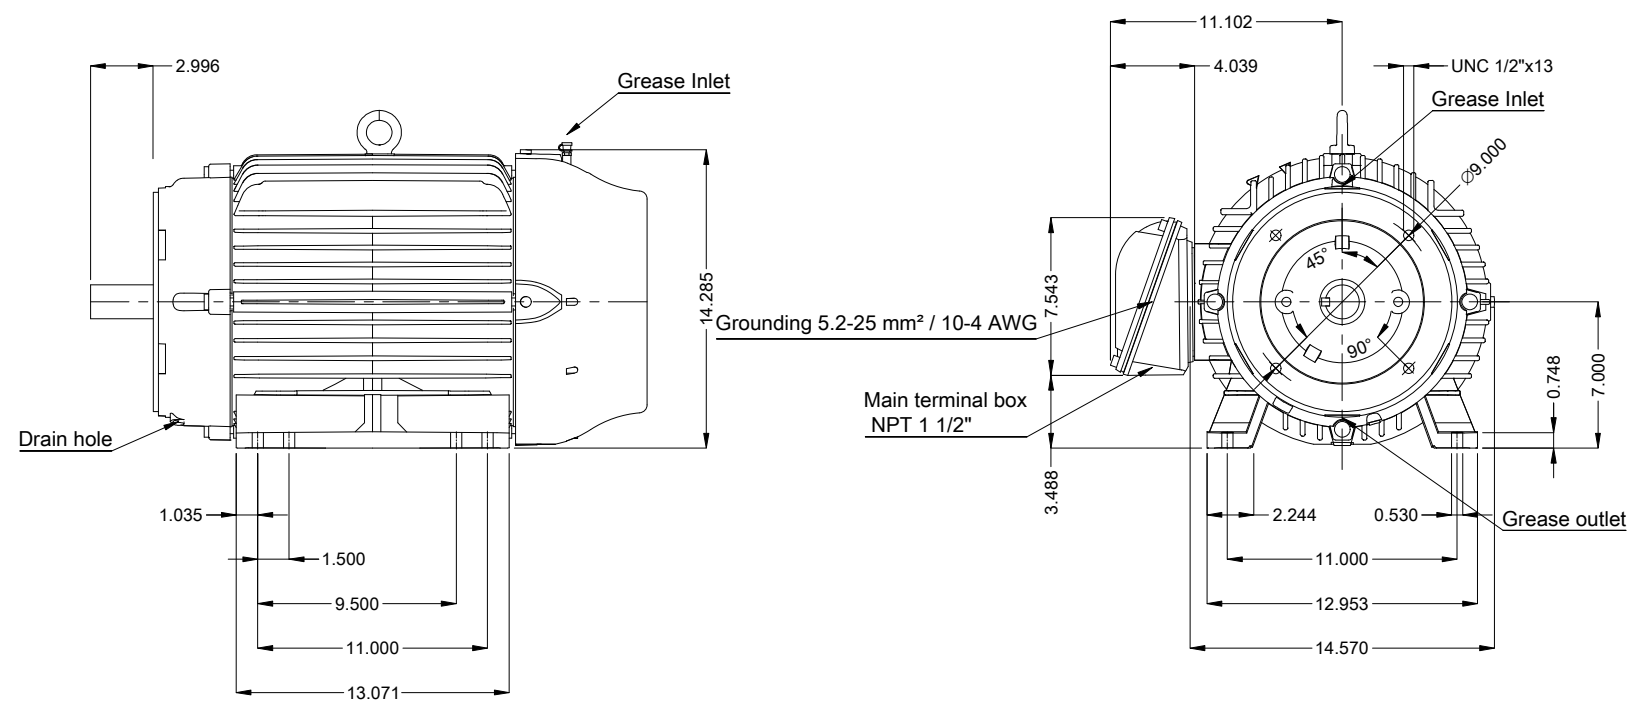

Without vertical jackscrews
Color RAL 5009
Painting plan 203A
Mounting B34D

25 HP 02 Poles 60 Hz										A
						Scale 1 : 9				
						HYBRISUSER				00
ECM		LOC		SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR W22 NEMA PREM. EFF. FRAME 284/6TSC IP55 TEFC			PREVIEW WDD 00 SHEET 1 / 1				
CHECKED										
RELEASED										
REL. DATE										