

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Nema Premium Efficiency Product code : 17400323

Frame	: 254/6TC	Locked rotor time	: 12 s (hot) 22 s (cold)
Output	: 20 HP (15 kW)	Temperature rise	: 80 K
Poles	: 2	Duty cycle	: S1
Frequency	: 60 Hz	Ambient temperature	: -20 °C to +40 °C
Rated voltage	: 575 V	Altitude	: 3280 ft
Rated current	: 18.2 A	Protection degree	: IP55
L. R. Amperes	: 120 A	Cooling method	: IC411 - TEFC
LRC	: 6.6	Mounting	: F-1/B34R(D)
No load current	: 5.50 A	Rotation ¹	: Both
Rated speed	: 3515 rpm	Noise level ²	: 75.0 dB(A)
Slip	: 2.36 %	Vibration class	: A
Rated torque	: 29.4 ft.lb	Starting method	: Direct On Line
Locked rotor torque	: 200 %	Approx. weight ³	: 211 lb
Pull up torque	: 150 %	Painting plan	: 207N
Breakdown torque	: 290 %	Color	: MUNSELL N 1 - MATTE
Insulation class	: F	Design	: B
Service factor	: 1.15		
Moment of inertia (J)	: 1.22 sq.ft.lb		

Output	50%	75%	100%	Load type	: -
Efficiency (%)	90.0	91.0	91.0	Load torque	: -
Power Factor	0.81	0.88	0.91	Load inertia (J=GD ² /4)	: -

Bearing type #1	Drive end 6309-Z-C3	Non drive end 6208-Z-C3	Foundation loads	
Bearing type #2	-	-	Max. traction	:
Lubrication interval	15797 h	20000 h	Max. compression	:
Lubricant amount #1	13 g	8 g		
Lubricant amount #2	-	-		
Lubricant type	MOBIL POLYREX EM			

Notes
See notes on page 2.

Losses at normative operating points (speed;torque), in percentage of rated output power

P1 (0,9;1,0)	P2 (0,5;1,0)	P3 (0,25;1,0)	P4 (0,9;0,5)	P5 (0,5;0,5)	P6 (0,5;0,25)	P7 (0,25;0,25)
8.8	7.3	6.7	4.5	2.9	1.9	1.3

This revision replaces and cancel the previous one, which must be eliminated.
(1) Looking the motor from the shaft end.
(2) Measured at 1m and with tolerance of +3dB(A).
(3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Rev.	Checked	Date
Performed by	farazq	1860715118		
Checked by	AUTOMATICO	Page	Rev.	
Date	15/06/2026	1 / 2	0	

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : V.J. PAMENSKY CANADA INC.

Product line : W01 - TEFC - Nema Premium Efficiency Product code : 17400323

Thermal protection ID	Application	Type	Quantity	Sensing Temperature
-----------------------	-------------	------	----------	---------------------

Notes



Standards	Specification : MG1 - Part 10	Vibration : MG1 - Part 7
	Test : MG1 - Part 12	Tolerance : MG1 - Part 12
	Noise : MG1 - Part 9	

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight, subject to be changed after manufacturing process.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG 1-12.

Rev.	Changes Summary	Rev.	Checked	Date
Performed by	farazq	1860715118		
Checked by	AUTOMATICO	Page	Rev.	
Date	15/06/2026	2 / 2	0	

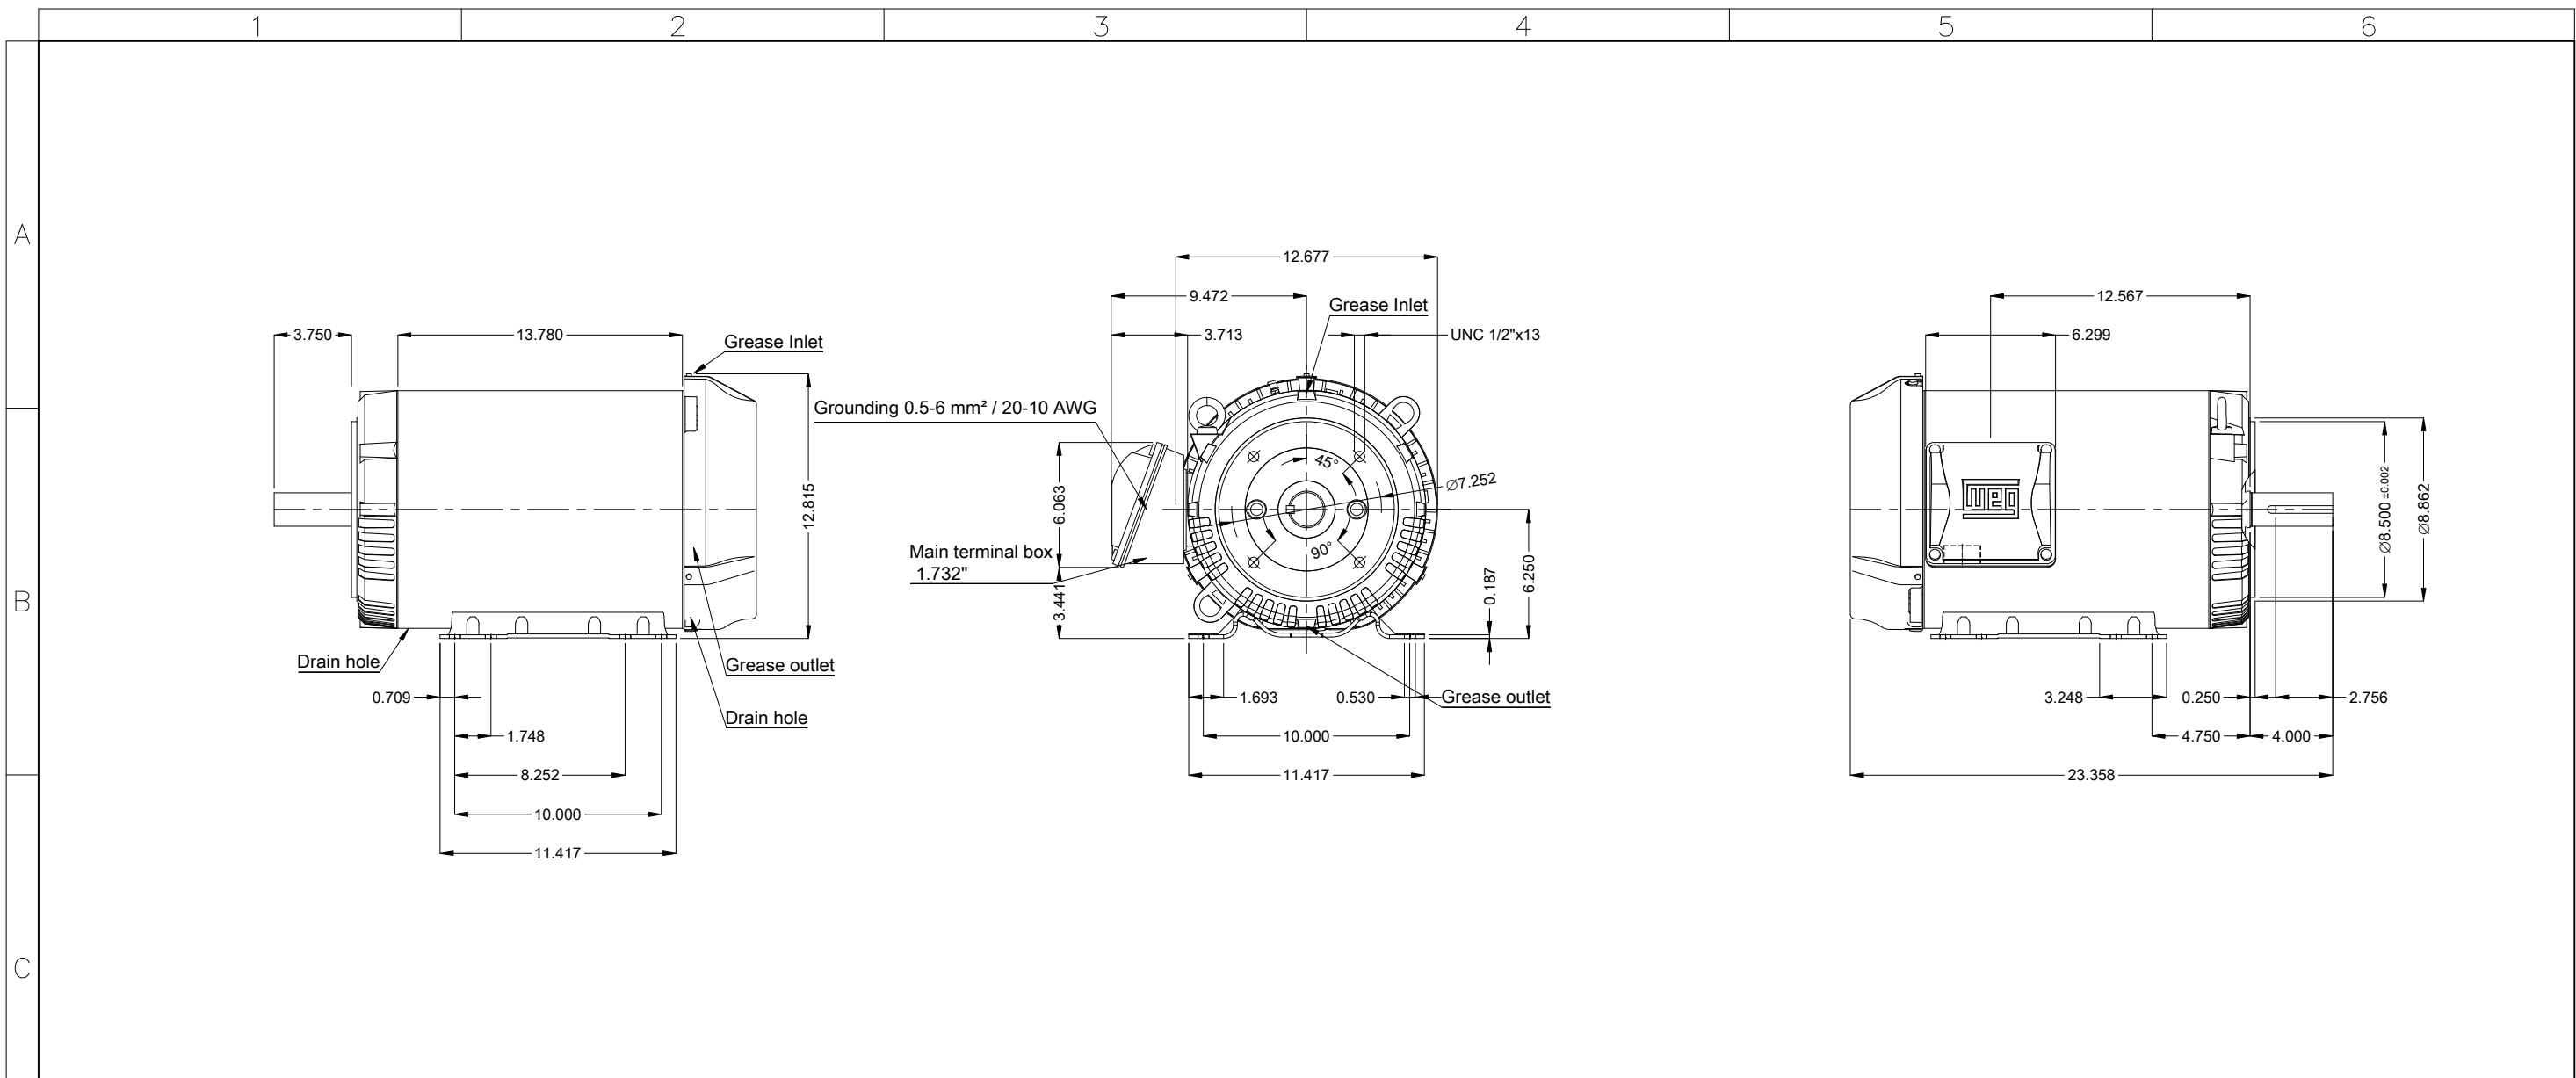

20 HP 02 Poles 60 Hz		A	
Scale 1 : 8			
HYBRISUSER		00	
ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED CHECKED RELEASED DATE VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL NEMA PREM. EFF. FRAME 254/6TC IP55 TEFC	<p>PREVIEW</p> <p>WDD 00</p> <p>SHEET 1 / 1</p>
CHECKED			
RELEASED			
REL. DATE			

Internal AEGIS ground ring on the DE
 Color Munsell N 1 matte black
 Painting plan 207N
 Mounting MARKET F-1/B34R(D)
 Mounting B34D

DE Shaft End			
--------------	--	--	--

20 HP 02 Poles 60 Hz		A	
Scale 1 : 8			
HYBRISUSER		00	
ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED CHECKED RELEASED DATE VER
EXECUTED	HYBRISUSER	THREE PH. MOTOR ROLLED STEEL NEMA PREM. EFF. FRAME 254/6TC IP55 TEFC	<p>PREVIEW</p> <p>WDD 00</p> <p>SHEET 1 / 1</p>
CHECKED			
RELEASED			
REL. DATE			

Dimensions in inches

A3

