

DATA SHEET



Three Phase Induction Motor - Squirrel Cage

Customer :								
Product line	: ODP NEMA Premium Efficiency Three-Phase	Product code :	10015870					
Frame	: 364/5TS	Cooling method	: IC01 - ODP					
Insulation class	: F	Mounting	: F-1					
Duty cycle	: Cont.(S1)	Rotation ¹	: Both (CW and CCW)					
Ambient temperature	: -20°C to +40°C	Starting method	: Direct On Line					
Altitude	: 1000 m.a.s.l.	Approx. weight ²	: 365 kg					
Protection degree	: IP23	Moment of inertia (J)	: 0.3498 kgm ²					
Design	: B							
Output [HP]	100	75	75	75	100	100	100	
Poles	2	2	2	2	2	2	2	
Frequency [Hz]	60	50	50	50	50	50	50	
Rated voltage [V]	230/460	380	400	415	380	400	415	
Rated current [A]	224/112	102	96.8	94.2	140	133	128	
L. R. Amperes [A]	1501/750	653	678	707	672	705	730	
LRC [A]	6.7x(Code G)	6.4x(Code G)	7.0x(Code G)	7.5x(Code H)	4.8x(Code D)	5.3x(Code E)	5.7x(Code F)	
No load current [A]	60.0/30.0	29.0	32.0	34.0	29.0	32.0	34.0	
Rated speed [RPM]	3560	2965	2970	2975	2945	2950	2945	
Slip [%]	1.11	1.17	1.00	0.83	1.83	1.67	1.83	
Rated torque [kgfm]	20.4	18.4	18.3	18.3	24.6	24.6	24.6	
Locked rotor torque [%]	190	200	210	240	150	160	180	
Breakdown torque [%]	250	240	260	290	170	190	210	
Service factor	1.15	1.15	1.15	1.15	1.15	1.15	1.15	
Temperature rise	80 K	80 K	80 K	80 K	80 K	80 K	80 K	
Locked rotor time	21s (cold) 12s (hot)	19s (cold) 11s (hot)	19s (cold) 11s (hot)	19s (cold) 11s (hot)	19s (cold) 11s (hot)	19s (cold) 11s (hot)	19s (cold) 11s (hot)	
Noise level ²	83.0 dB(A)							
Efficiency (%)	25%	94.0	88.0	87.8	87.5	90.3	90.3	90.3
	50%	94.1	90.2	90.0	89.9	91.7	91.7	91.7
	75%	94.5	91.9	91.9	91.9	92.4	92.4	92.4
	100%	94.5	94.3	94.3	94.5	93.8	93.8	93.8
Power Factor	25%	0.59	0.56	0.51	0.49	0.64	0.61	0.58
	50%	0.84	0.78	0.75	0.73	0.85	0.83	0.81
	75%	0.89	0.86	0.84	0.83	0.87	0.87	0.87
	100%	0.89	0.87	0.87	0.86	0.87	0.87	0.87
Bearing type	: 6314 C3	6314 C3	Foundation loads					
Sealing	: Without	Without	Max. traction	: 399 kgf				
	Bearing Seal		Bearing Seal	Max. compression	: 764 kgf			
Lubrication interval	: 14418 h	14418 h						
Lubricant amount	: 27 g	27 g						
Lubricant type	: Mobil Polyrex EM							
Notes USABLE @208V 248A SF 1.15 SFA 285A								
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.				These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.				
Rev.	Changes Summary			Performed	Checked	Date		
Performed by								
Checked by						Page	Revision	
Date	05/02/2024					1 / 8		

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10015870

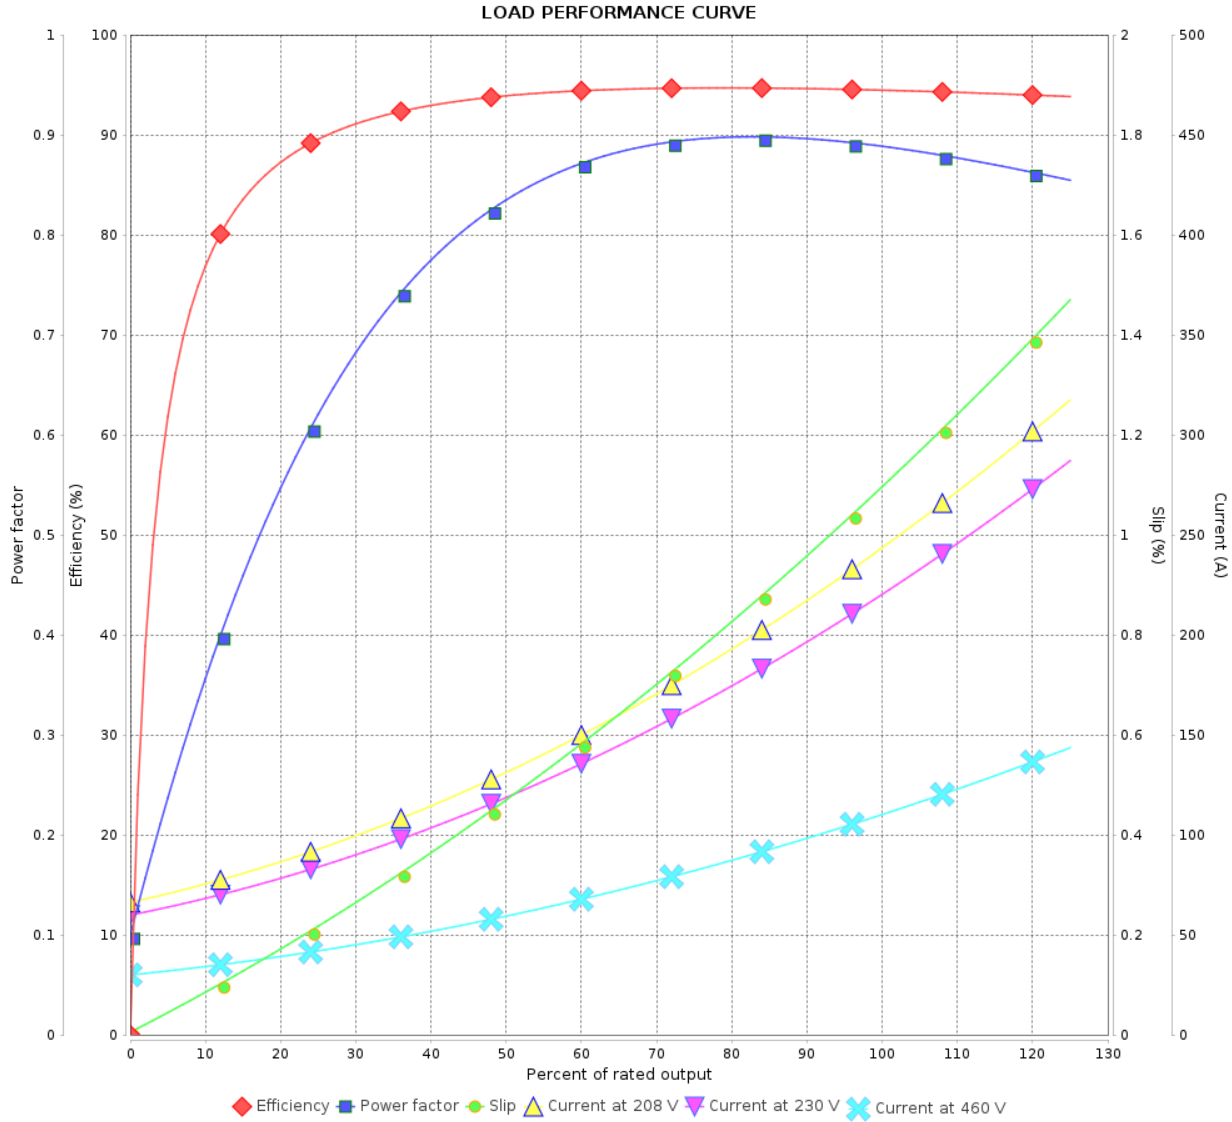

Performance : 230/460 V 60 Hz 2P

Rated current : 224/112 A
 LRC : 6.7
 Rated torque : 20.4 kgfm
 Locked rotor torque : 190 %
 Breakdown torque : 250 %
 Rated speed : 3560 rpm

Moment of inertia (J) : 0.3498 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 2 / 8	Revision
Checked by				
Date	05/02/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10015870

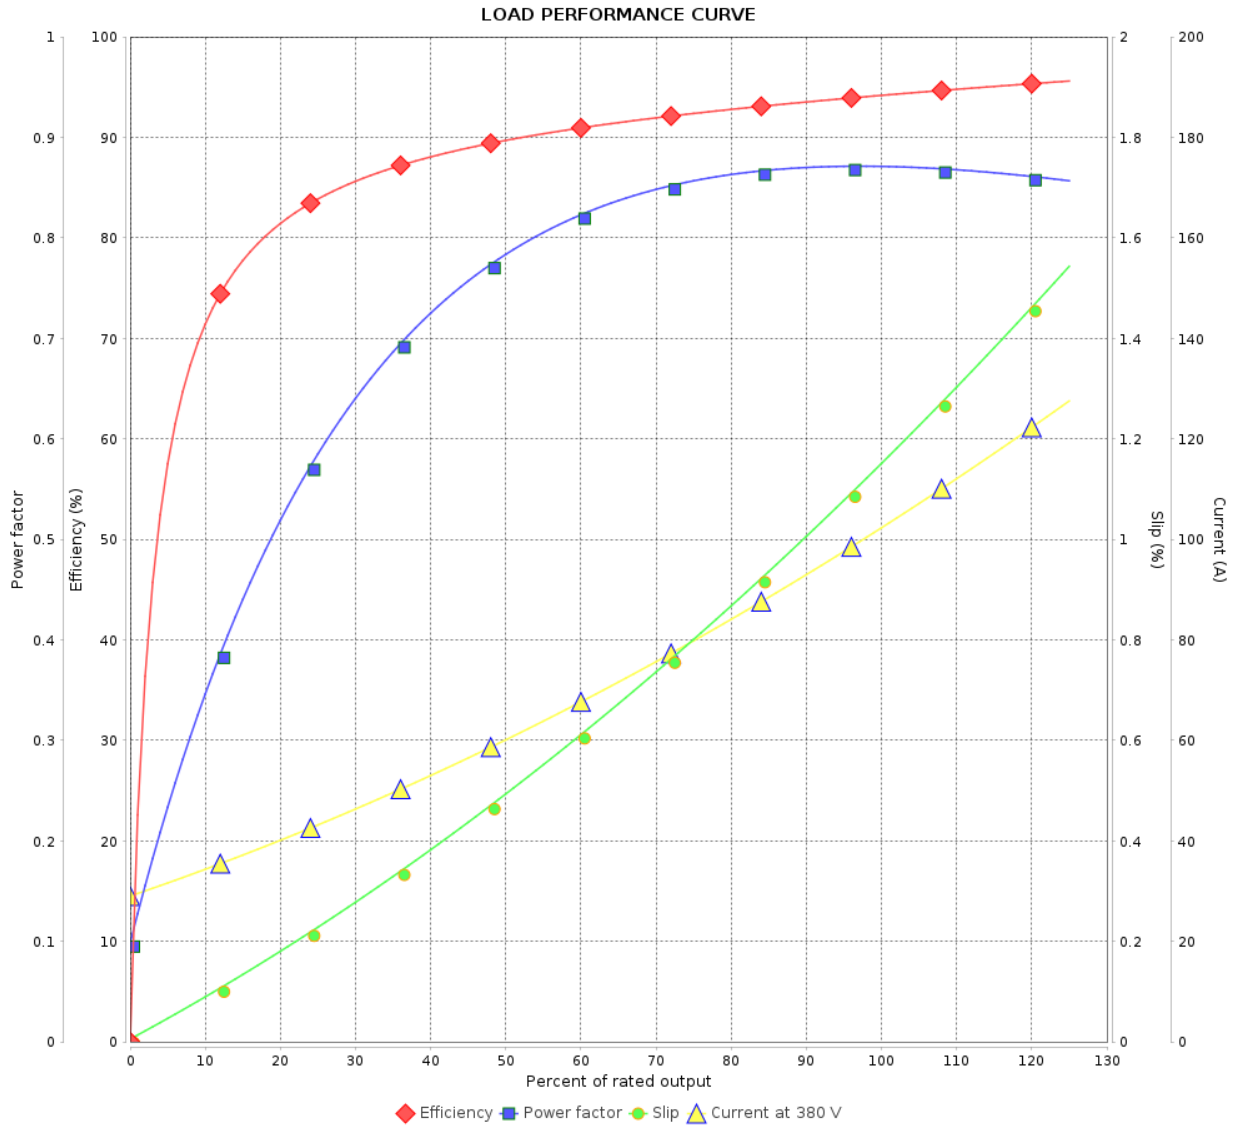

Performance : 380 V 50 Hz 2P IE3

Rated current : 102 A
 LRC : 6.4
 Rated torque : 18.4 kgfm
 Locked rotor torque : 200 %
 Breakdown torque : 240 %
 Rated speed : 2965 rpm

Moment of inertia (J) : 0.3498 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10015870

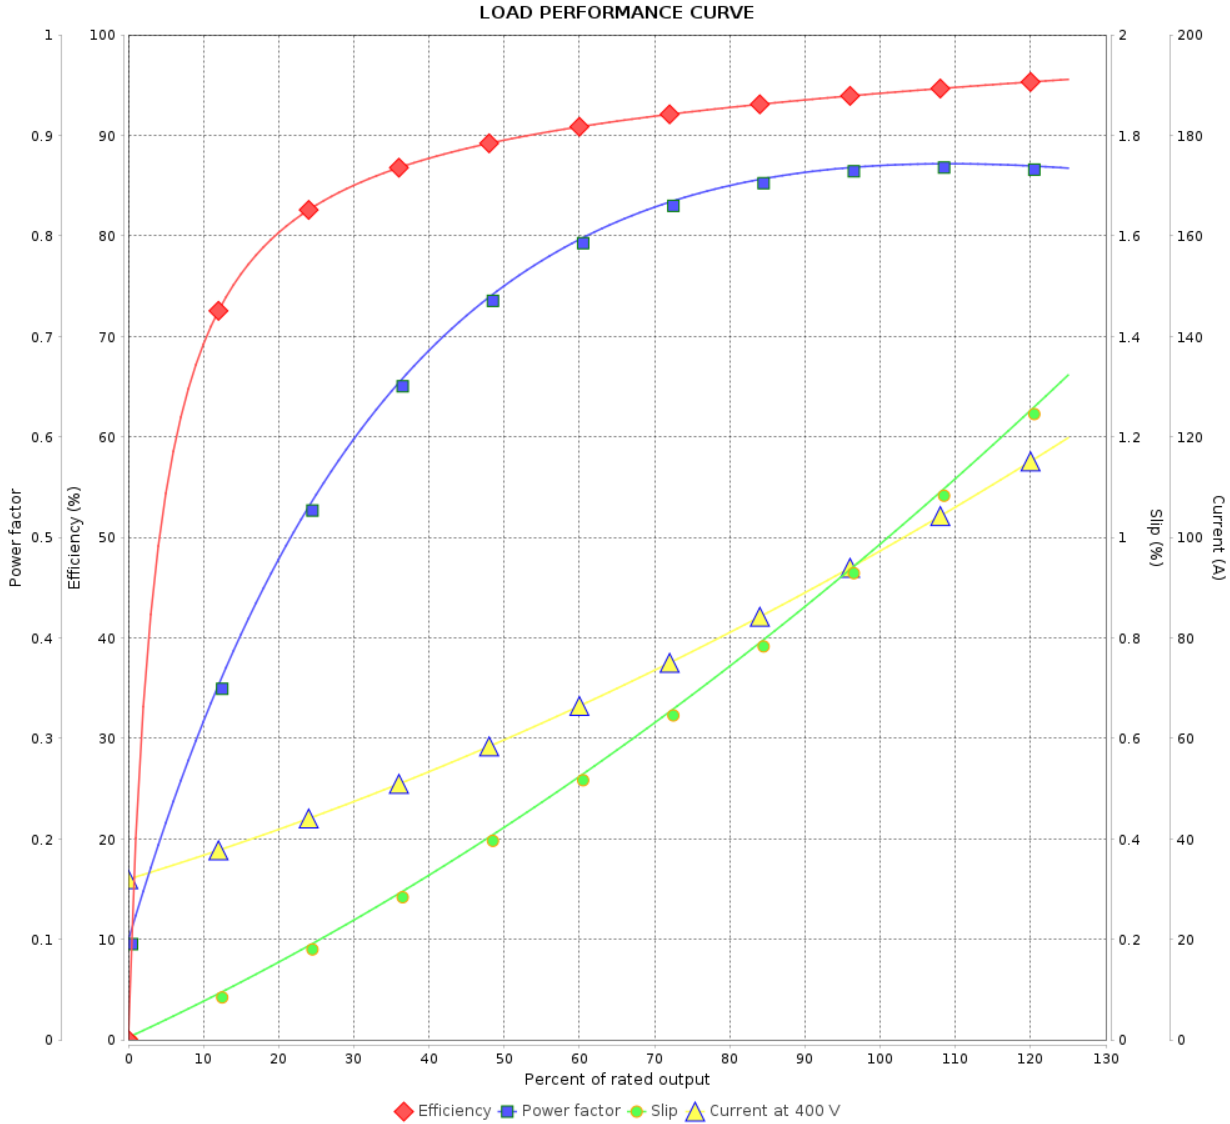

Performance : 400 V 50 Hz 2P IE3

Rated current : 96.8 A
 LRC : 7.0
 Rated torque : 18.3 kgfm
 Locked rotor torque : 210 %
 Breakdown torque : 260 %
 Rated speed : 2970 rpm

Moment of inertia (J) : 0.3498 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 4 / 8	Revision
Checked by				
Date	05/02/2024			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10015870

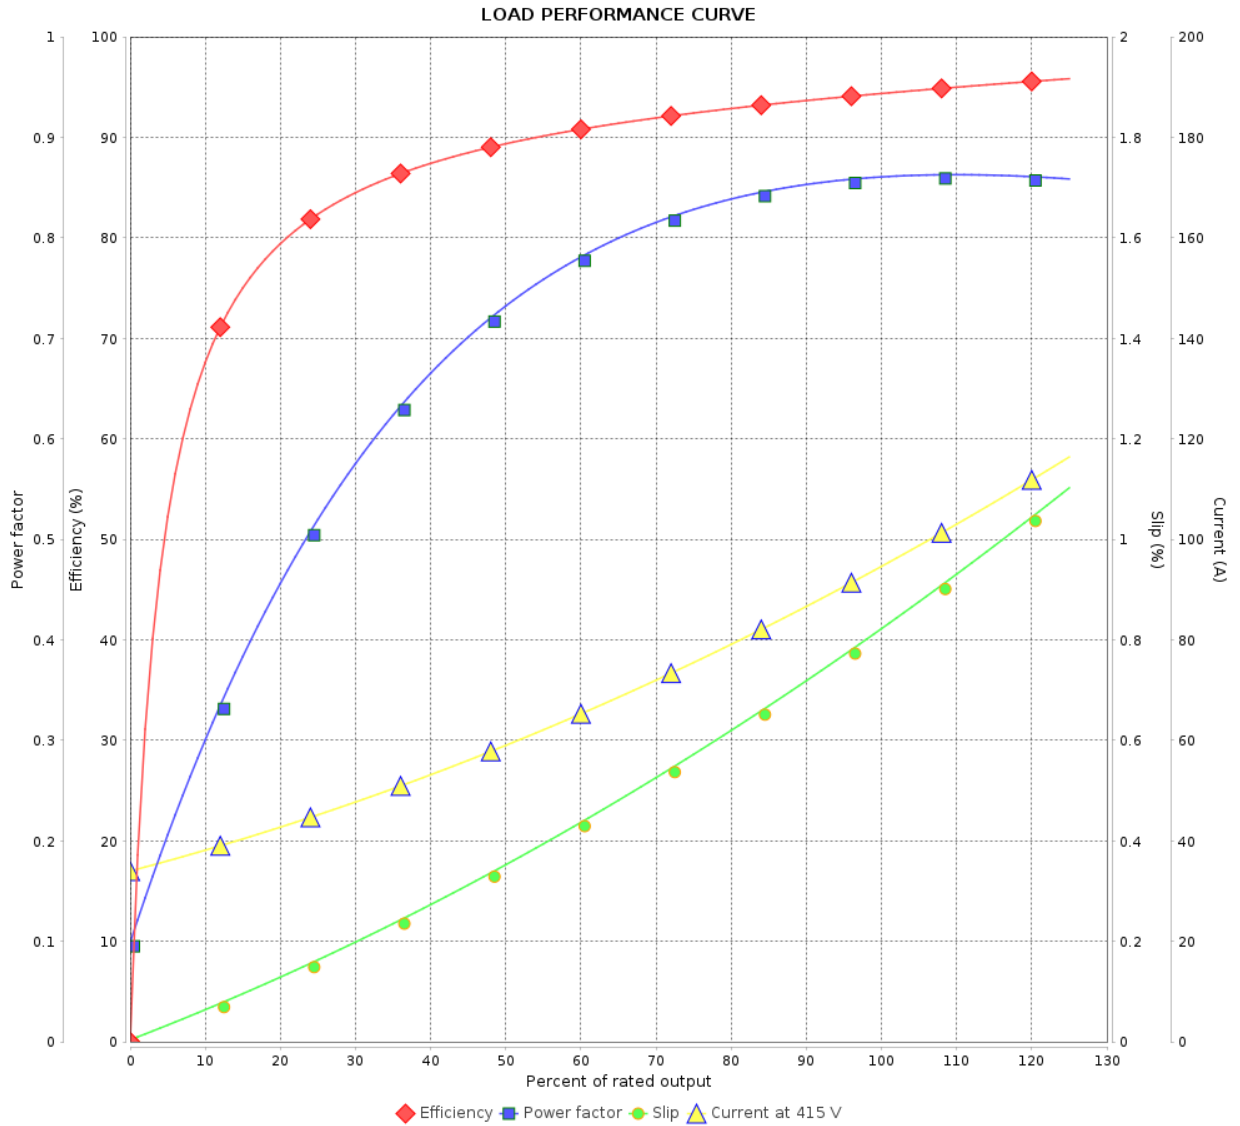

Performance : 415 V 50 Hz 2P IE3

Rated current : 94.2 A
 LRC : 7.5
 Rated torque : 18.3 kgfm
 Locked rotor torque : 240 %
 Breakdown torque : 290 %
 Rated speed : 2975 rpm

Moment of inertia (J) : 0.3498 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date				
			Page	Revision
			5 / 8	

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10015870

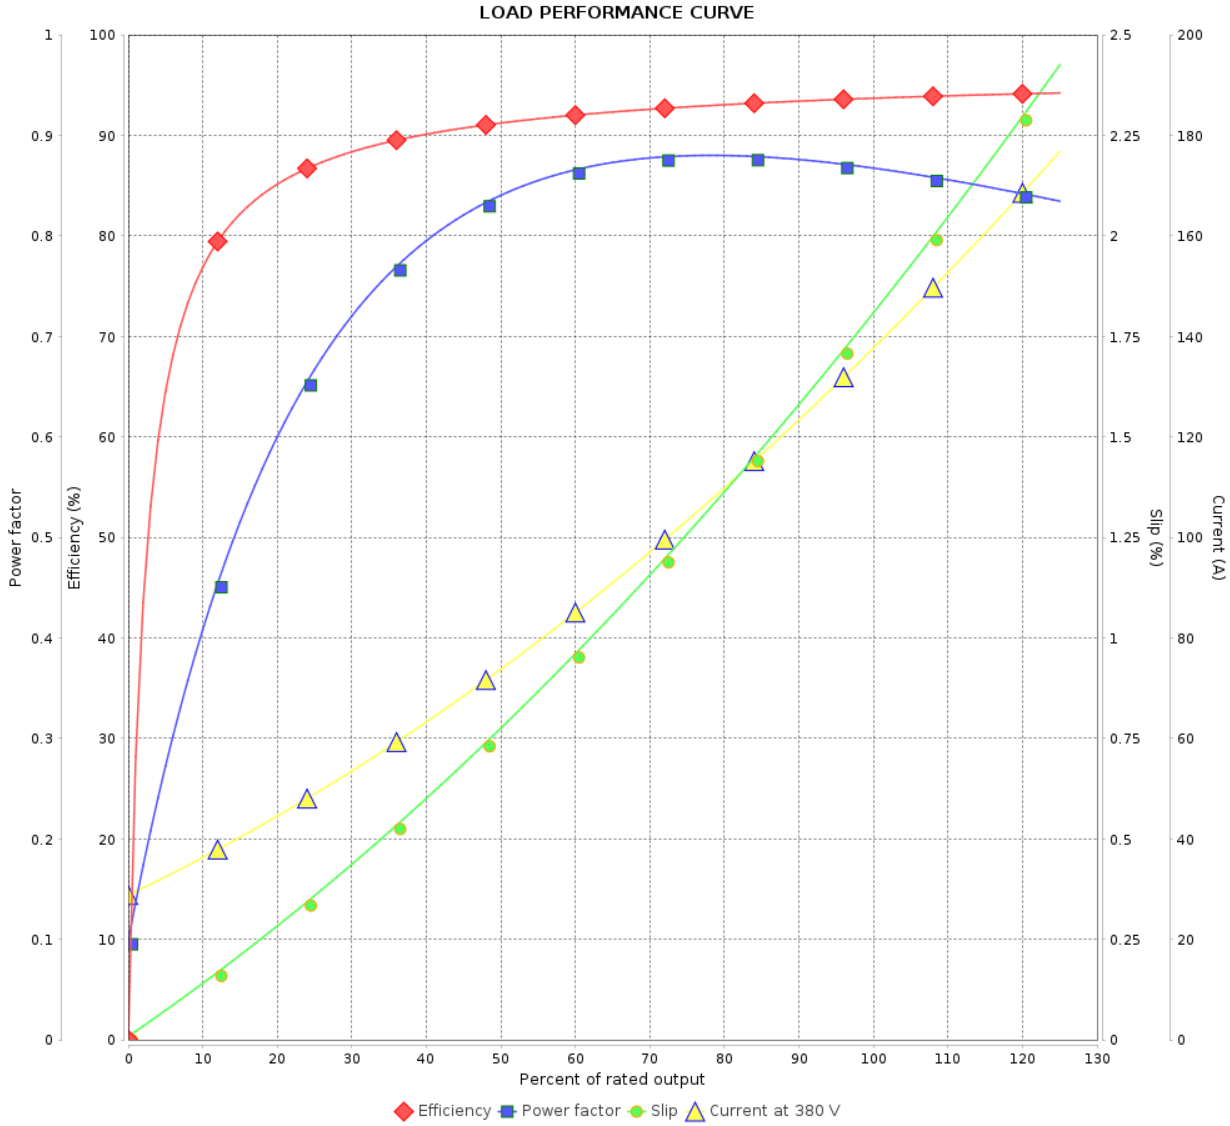

Performance : 380 V 50 Hz 2P IE2

Rated current : 140 A
 LRC : 4.8
 Rated torque : 24.6 kgfm
 Locked rotor torque : 150 %
 Breakdown torque : 170 %
 Rated speed : 2945 rpm

Moment of inertia (J) : 0.3498 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10015870

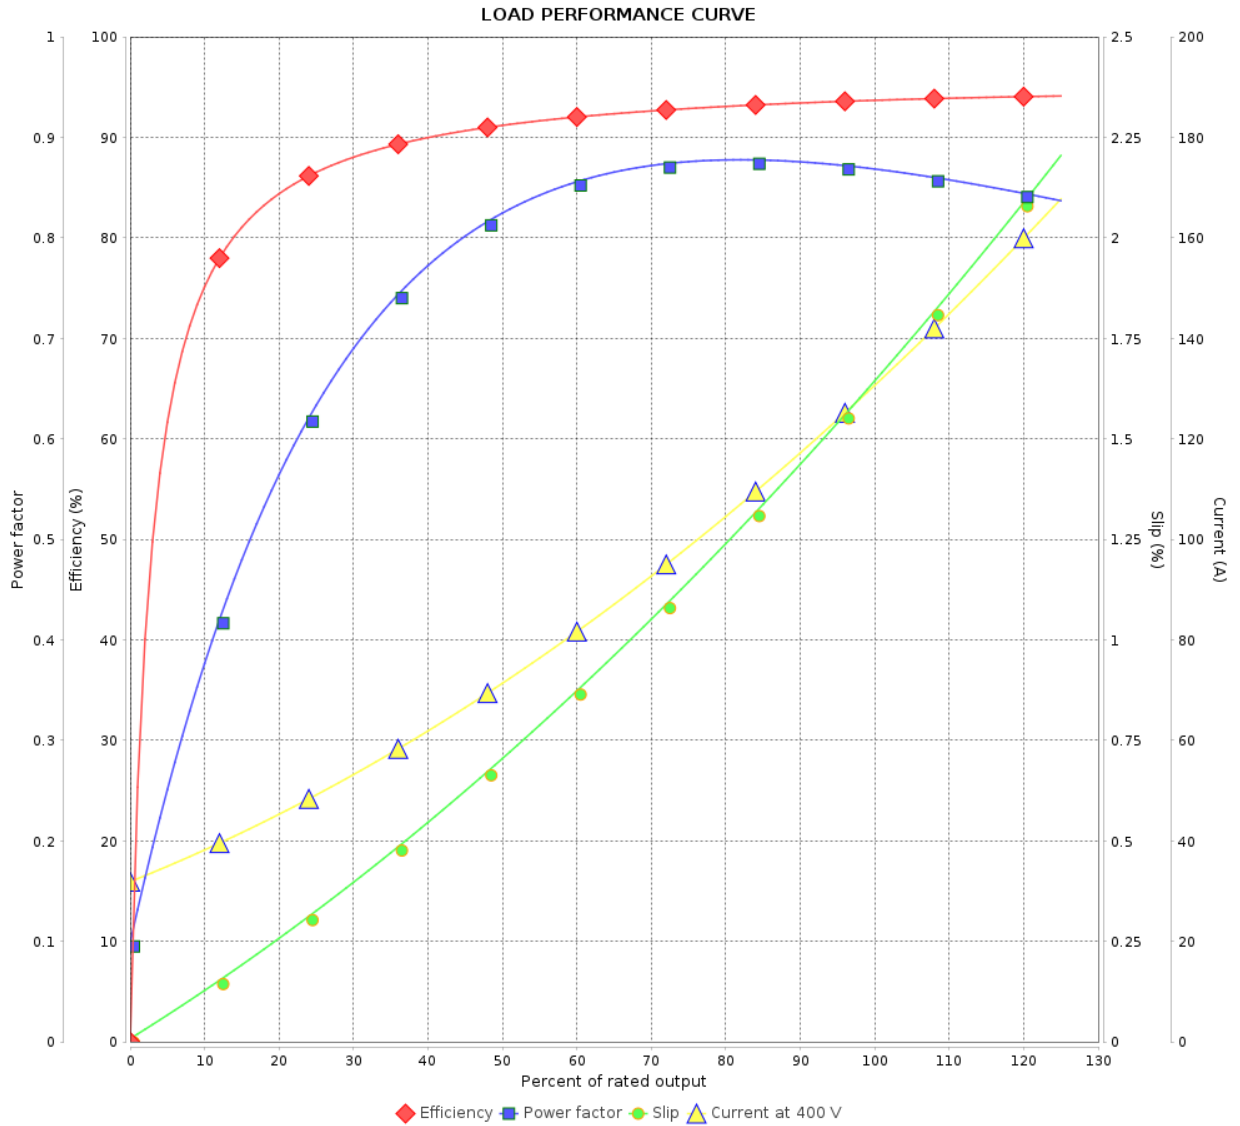

Performance : 400 V 50 Hz 2P IE2

Rated current : 133 A
 LRC : 5.3
 Rated torque : 24.6 kgfm
 Locked rotor torque : 160 %
 Breakdown torque : 190 %
 Rated speed : 2950 rpm

Moment of inertia (J) : 0.3498 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by				
Date				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer : _____

Product line : ODP NEMA Premium Efficiency Three-Phase

Product code : 10015870

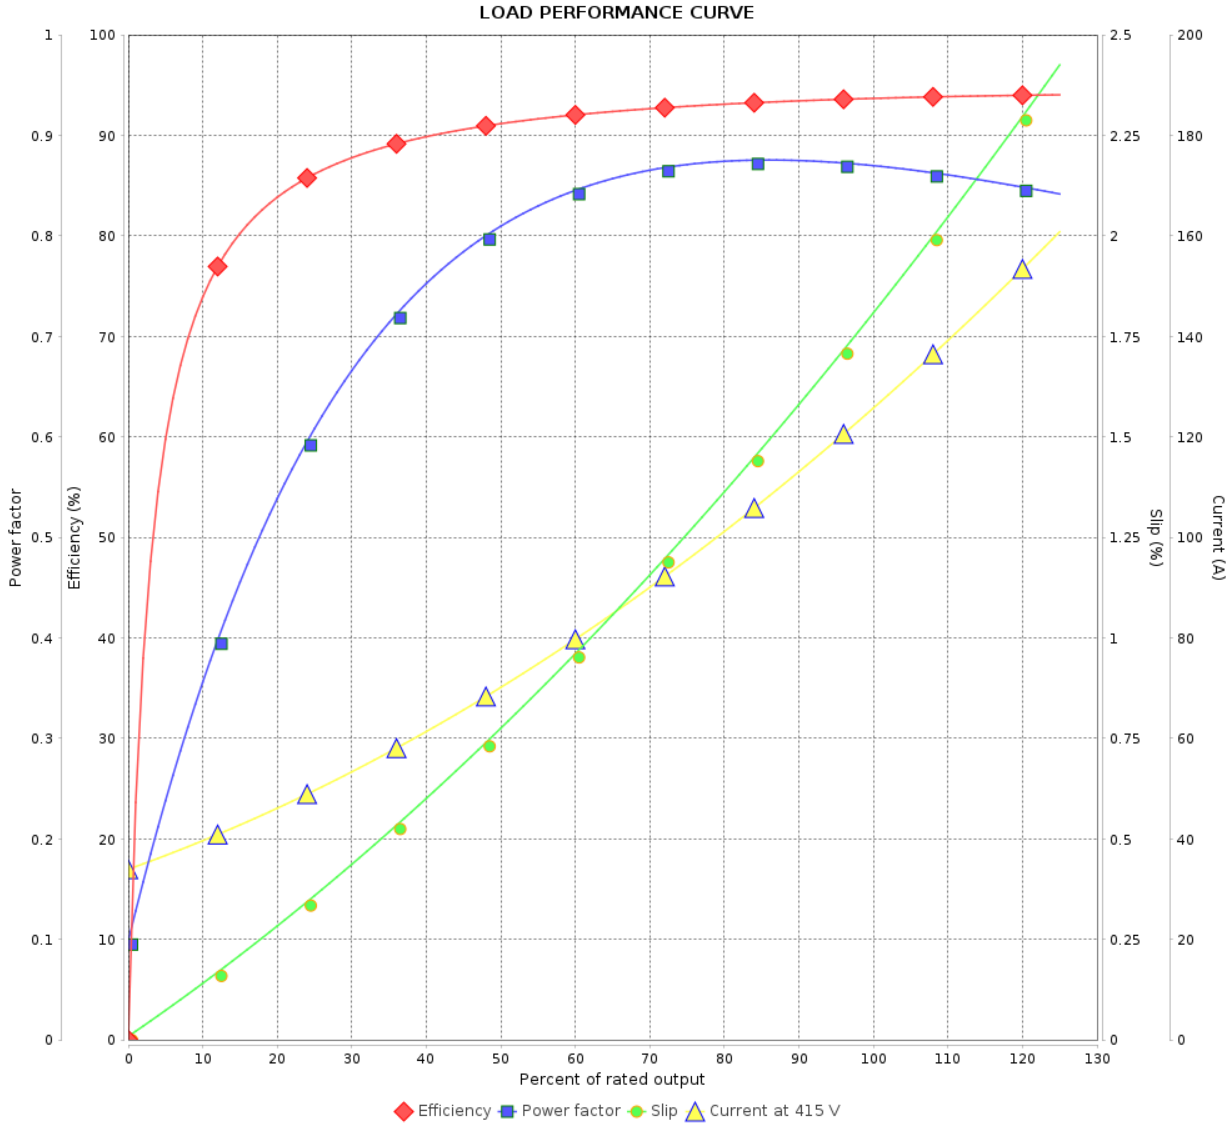

Performance : 415 V 50 Hz 2P IE2

Rated current : 128 A
 LRC : 5.7
 Rated torque : 24.6 kgfm
 Locked rotor torque : 180 %
 Breakdown torque : 210 %
 Rated speed : 2945 rpm

Moment of inertia (J) : 0.3498 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : F
 Service factor : 1.15
 Temperature rise : 80 K
 Design : B

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page 8 / 8	Revision
Checked by				
Date	05/02/2024			