

# DATA SHEET



## Single Phase Induction Motor - Squirrel Cage

|  |  |                         |  |                           |          |
|--|--|-------------------------|--|---------------------------|----------|
| Customer :   |  |                         |  |                           |          |
| Product line : Farm Duty Single-Phase  |  | Product code : 10064792 |  |                           |          |
| Frame : B56<br>Output : 0.75 HP (0.55 kW)<br>Poles : 4<br>Frequency : 60 Hz<br>Rated voltage : 115/230 V<br>Rated current : 10.6/5.30 A<br>L. R. Amperes : 65.7/32.9 A<br>LRC : 6.2x(Code M)<br>No load current : 8.00/4.00 A<br>Rated speed : 1745 rpm<br>Slip : 3.06 %<br>Rated torque : 0.312 kgfm<br>Locked rotor torque : 300 %<br>Breakdown torque : 250 %<br>Insulation class : B<br>Service factor : 1.15<br>Moment of inertia (J) : 0.0041 kgm <sup>2</sup> | Locked rotor time : 10s (cold) 6s (hot)<br>Temperature rise : 80 K<br>Duty cycle : Cont.(S1)<br>Ambient temperature : -20°C to +40°C<br>Altitude : 1000 m.a.s.l.<br>Protection degree : IP55<br>Cooling method : IC411 - TEFC<br>Mounting : F-1<br>Rotation <sup>1</sup> : Both (CW and CCW)<br>Noise level <sup>2</sup> : 55.0 dB(A)<br>Starting method : Direct On Line<br>Approx. weight <sup>3</sup> : 12.4 kg |                         |  |                           |          |
| Output   | 50%  | 75%                     | 100%   | Foundation loads          |          |
| Efficiency (%)   | 58.5   | 66.0                    | 68.5   | Max. traction : 18 kgf    |          |
| Power Factor   | 0.47   | 0.58                    | 0.66   | Max. compression : 31 kgf |          |
|  |  | <u>Drive end</u>        | <u>Non drive end</u>   |                           |          |
| Bearing type   | :  | 6203 ZZ                 | 6202 ZZ  |                           |          |
| Sealing  | :  | V'Ring                  | V'Ring   |                           |          |
| Lubrication interval   | :  | -                       | -  |                           |          |
| Lubricant amount   | :  | -                       | -  |                           |          |
| Lubricant type   | :  | Mobil Polyrex EM        |  |                           |          |
| Notes  |  |                         |  |                           |          |
| This revision replaces and cancel the previous one, which must be eliminated.<br>(1) Looking the motor from the shaft end.<br>(2) Measured at 1m and with tolerance of +3dB(A).<br>(3) Approximate weight subject to changes after manufacturing process.<br>(4) At 100% of full load.   |  |                         | These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1. |                           |          |
| Rev.   | Changes Summary  |                         | Performed  | Checked                   | Date     |
| Performed by   |  |                         |  |                           |          |
| Checked by   |  |                         |  | Page                      | Revision |
| Date   | 20/10/2024   |                         |  | 1 / 2                     |          |

# LOAD PERFORMANCE CURVE


Single Phase Induction Motor - Squirrel Cage



Customer :

Product line : Farm Duty Single-Phase

Product code : 10064792

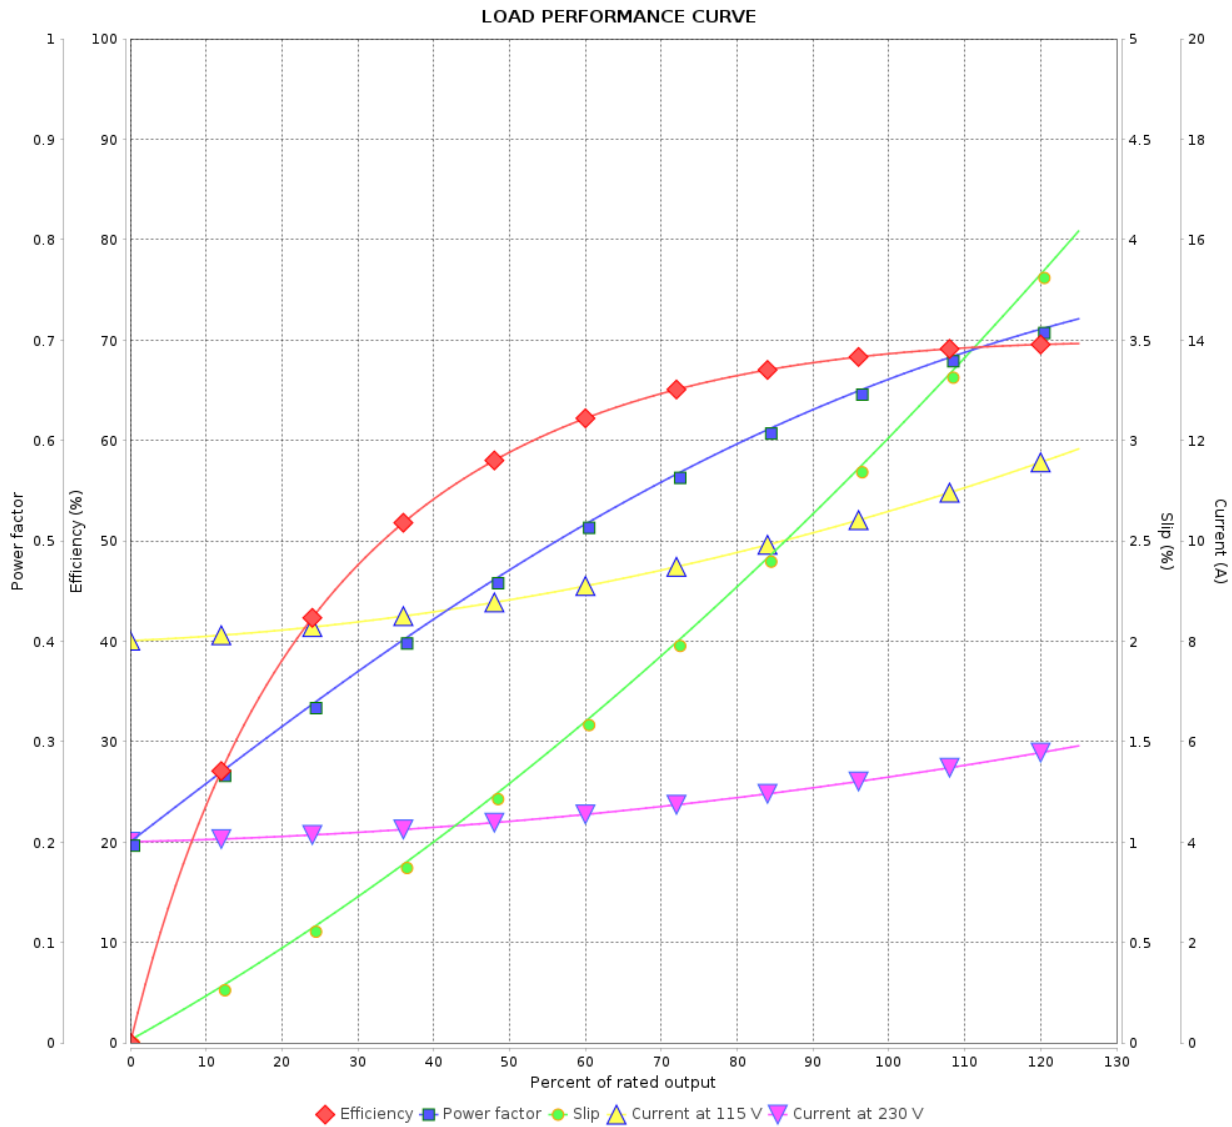

Performance : 115/230 V 60 Hz 4P

Rated current : 10.6/5.30 A  
 LRC : 6.2  
 Rated torque : 0.312 kgfm  
 Locked rotor torque : 300 %  
 Breakdown torque : 250 %  
 Rated speed : 1745 rpm

Moment of inertia (J) : 0.0041 kgm<sup>2</sup>  
 Duty cycle : Cont.(S1)  
 Insulation class : B  
 Service factor : 1.15  
 Temperature rise : 80 K

| Rev.         | Changes Summary | Performed | Checked | Date     |
|--------------|-----------------|-----------|---------|----------|
|              |                 |           |         |          |
| Performed by |                 |           | Page    | Revision |
| Checked by   |                 |           |         |          |
| Date         |                 |           |         |          |