

DATA SHEET



Single Phase Induction Motor - Squirrel Cage

Customer :					
Product line : General Single-Phase			Product code : 10083691		
Frame	: B56		Locked rotor time	: 10s (cold) 6s (hot)	
Output	: 0.33 HP (0.25 kW)		Temperature rise	: 80 K	
Poles	: 4		Duty cycle	: Cont.(S1)	
Frequency	: 60 Hz		Ambient temperature	: -20°C to +40°C	
Rated voltage	: 115/208-230 V		Altitude	: 1000 m.a.s.l.	
Rated current	: 5.60/2.70-2.80 A		Protection degree	: IP55	
L. R. Amperes	: 32.5/15.7-16.2 A		Cooling method	: IC411 - TEFC	
LRC	: 5.8x(Code N)		Mounting	: F-1	
No load current	: 4.60/1.98-2.30 A		Rotation ¹	: Both (CW and CCW)	
Rated speed	: 1750 rpm		Noise level ²	: 55.0 dB(A)	
Slip	: 2.78 %		Starting method	: Direct On Line	
Rated torque	: 0.137 kgfm		Approx. weight ³	: 9.6 kg	
Locked rotor torque	: 340 %				
Breakdown torque	: 280 %				
Insulation class	: B				
Service factor	: 1.15				
Moment of inertia (J)	: 0.0026 kgm ²				
Output	25%	50%	75%	100%	
Efficiency (%)	46.6	49.0	58.0	61.0	
Power Factor	0.24	0.44	0.53	0.62	
Foundation loads					
Max. traction : 7 kgf					
Max. compression : 17 kgf					
		<u>Drive end</u>		<u>Non drive end</u>	
Bearing type	:	6203 ZZ		6202 ZZ	
Sealing	:	V'Ring		V'Ring	
Lubrication interval	:	-		-	
Lubricant amount	:	-		-	
Lubricant type	:	Mobil Polyrex EM			
Notes:					
This revision replaces and cancel the previous one, which must be eliminated. (1) Looking the motor from the shaft end. (2) Measured at 1m and with tolerance of +3dB(A). (3) Approximate weight subject to changes after manufacturing process. (4) At 100% of full load.			These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in NEMA MG-1.		
Rev.	Changes Summary		Performed	Checked	Date
Performed by					
Checked by				Page	Revision
Date	14/01/2024			1 / 2	

LOAD PERFORMANCE CURVE

Single Phase Induction Motor - Squirrel Cage




Customer :

Product line : General Single-Phase

Product code : 10083691

LOAD PERFORMANCE CURVE

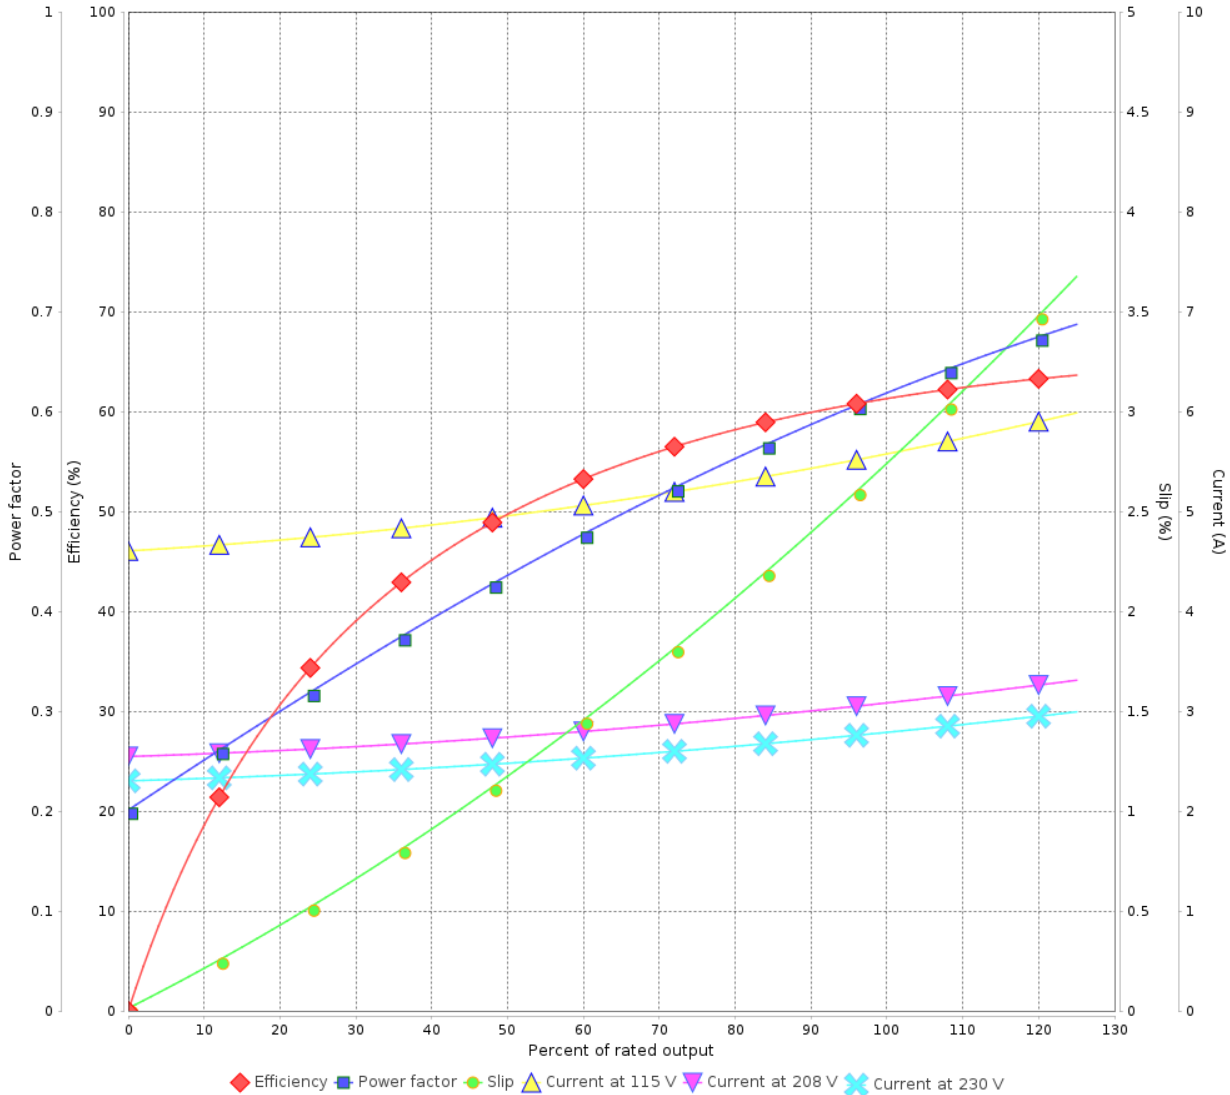

Performance : 115/208-230 V 60 Hz 4P

Rated current : 5.60/2.70-2.80 A
 LRC : 5.8
 Rated torque : 0.137 kgfm
 Locked rotor torque : 340 %
 Breakdown torque : 280 %
 Rated speed : 1750 rpm

Moment of inertia (J) : 0.0026 kgm²
 Duty cycle : Cont.(S1)
 Insulation class : B
 Service factor :
 Temperature rise : 80 K

Rev.	Changes Summary	Performed	Checked	Date
Performed by			Page	Revision
Checked by			2 / 2	
Date	14/01/2024			